


Frame 50

SURFACE

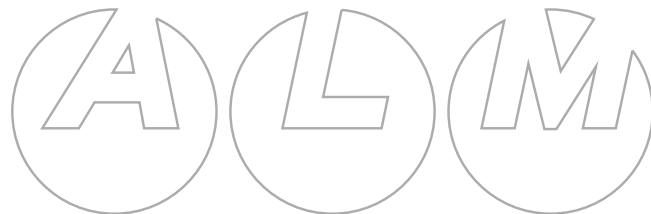

SPECIFICATION SHEET

Frame 50



Model 1546

Type

S Surface

Size

26 26.0" [662mm]

38 37.9" [963mm]

50 49.7" [1262mm]

Custom

Wattage ^{1,2}

26"

L 24W (3200lm)

M 48W (5945lm)

38"

L 36W (4800lm)

M 72W (8915lm)

50"

L 48W (6400lm)

M 96W (11888lm)

Color Temp ³

30 3000

35 3500

40 4000

Voltage

2 220/240 Volt

Driver

RD Remote

Control - RD

S Non-dim

D010 0-10V

DALI DALI

SWD SwitchDIM

Diffuser Bottom

SW Satin opal acrylic

Finish

16 Clear anodized aluminum

21 Painted white - RAL 9010 matte

26 Painted black - RAL 9005 matte

22 Painted custom color

Notes

1 Nominal lumens value specified



2 Linear LED board, constant voltage


24 Volt

3 90+ CRI standard

Example fixture number:

1546 - S - 38 - L - 30 - 2 - RD - S - SW - 16

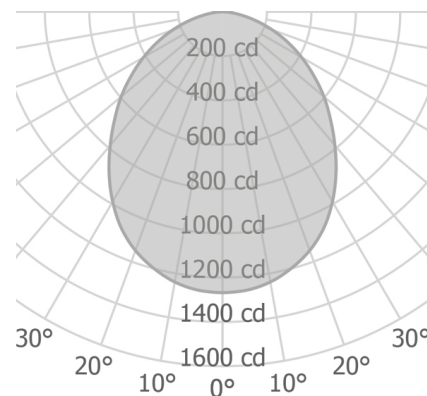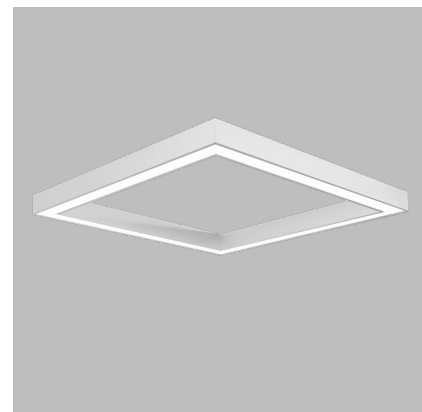

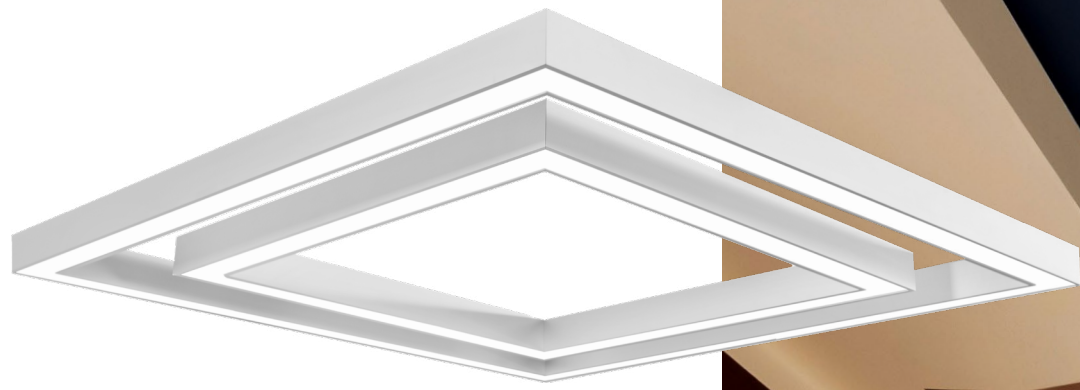

Multiple configurations – two or more fixtures

Frame 50

SURFACE

The narrow line of the light fixture enables you to create appealing lighting scenarios. Streamlined and minimal, the Frame 50 is an elegant and refined option for direct illumination of the space. Aluminum construction allows the flexibility to be altered as your imagination allows.



| Size | |
|--------|-----------------|
| 26 | 26.0" [662mm] |
| 38 | 37.9" [963mm] |
| 50 | 49.7" [1,262mm] |
| Custom | |



* 50mm x 50mm fixture body profile
* Fixture is ADA compliant

Frame 50

SURFACE



SPECIFICATION SHEET

Frame 50

