

Frame 50

SURFACE



SPECIFICATION SHEET

Frame 50



Model 1546

Type

S Surface

Size

26 26.0" [662mm]
38 37.9" [963mm]
50 49.7" [1262mm]
Custom

Wattage^{1,2}

26"
L 24W (3200lm)
M 48W (5945lm)
38"
L 36W (4800lm)
M 72W (8915lm)
50"
L 48W (6400lm)
M 96W (11888lm)

Color Temp³

30 3000
35 3500
40 4000

Voltage

U 120/277 Volt
1 120 Volt (DFPN only - see section Control)

Driver

RD Remote

Control - RD

S Non-dim
D010 0-10V 10%
DFPN Lutron Forward Phase 1% 120 Volt
L3DAE Lutron Hi-lume 1% EcoSystem
L3DOE Hi-lume Premier 0.1% EcoSystem

Diffuser Bottom

SW Satin opal acrylic

Finish



16 Clear anodized aluminum
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color


Notes

1 Nominal lumens value specified
2 Linear LED board, constant voltage 24 Volt
3 90+ CRI standard

Example fixture number:

1546 - S - 38 - L - 30 - U - RD - S - SW - 16

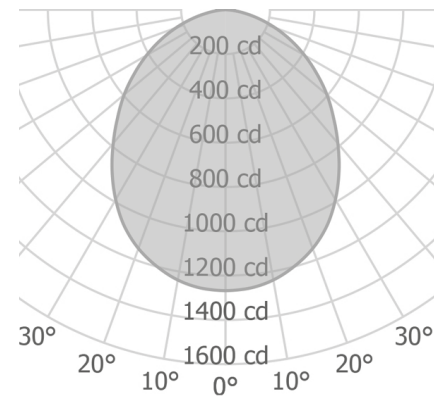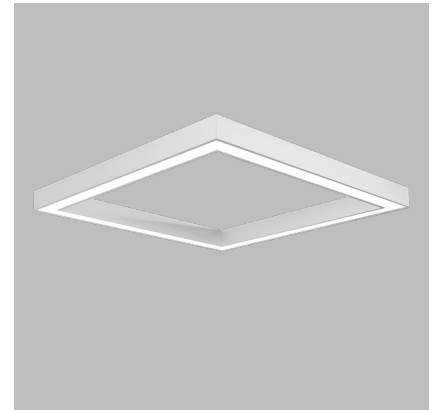

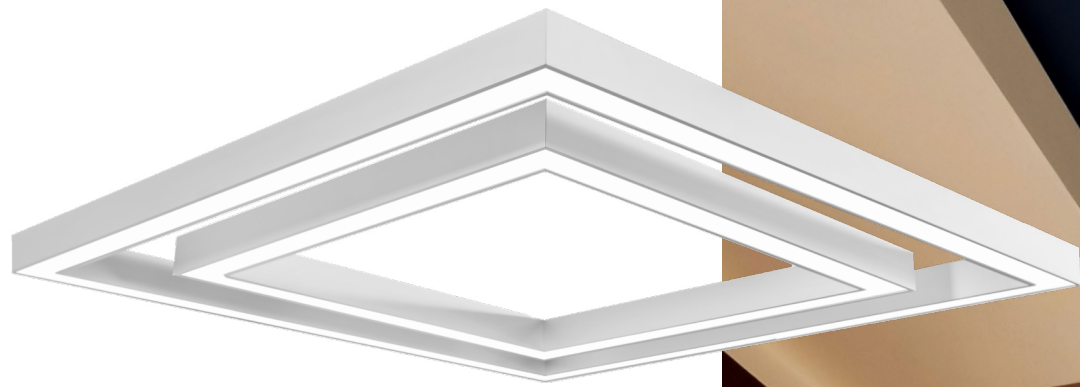

Multiple configurations – two or more fixtures

Frame 50

SURFACE

The narrow line of the light fixture enables you to create appealing lighting scenarios. Streamlined and minimal, the Frame 50 is an elegant and refined option for direct illumination of the space. Aluminum construction allows the flexibility to be altered as your imagination allows.



Size	
26	26.0" [662mm]
38	37.9" [963mm]
50	49.7" [1,262mm]
Custom	



* 50mm x 50mm fixture body profile
* Fixture is ADA compliant

Frame 50

SURFACE



SPECIFICATION SHEET

Frame 50

