


clearline


A clean, elegant design and simple technical details are the design principles of the ClearLine profile lighting system.


Streamlined and minimal, the ClearLine pendant is an elegant and refined option for direct and indirect illumination in offices or reception desks. A satin-finished acrylic lens provides soft diffused light.

ClearLine pendant mounts via aircraft cable. Cable grippers used allow one to adjust mounting height without tools. Special optics of the acrylic lens limits light distribution in order to reduce glare. ClearLine is a flexible system that easily adapts itself to different types of situations and architectural spaces.

 **Finish**
Clear Anodized Aluminum

 **Optional finish**
Painted White
Painted Custom Color

 **Diffuser**
Clear Satin Acrylic

 **Optional difuser**
Satin White Opal Acrylic

Consult factory for LED and dimming options



Series	
CL2P	Pendant
CL2W	Wall
CL2S	Surface

* Fixture Length	* Lamping	* Diffuser	* Suspension / Mounting	* Voltage
3 36"	00 None	00 None	SM Surface Mounted	1 120 Volts
4 48"	40 1 x 14 Watt / G5	SA Clear Satin Acrylic	C Cable Suspension	2 277 Volts
6 72"	402 2 x 14 Watt / G5	SW Satin White Opal Acrylic	S Stem Suspension	U 120/277 Volts
8 96"	41 1 x 24 Watt HO / G5	CX Extruder Aluminum Cover	WS Wall Small Bracket	
9 108"	412 2 x 24 Watt HO / G5			
10 120"	42 1 x 21 Watt / G5	* Reflector	* Cable Support / Power Feed	* Circuit
12 144"	422 2 x 21 Watt / G5	AR Asymmetric Reflector	01 Option: WS-1	1 Single
	423 3 x 21 Watt / G5	SR Symmetric Reflector	02 Option: WS-2	2 Dual
	424 4 x 21 Watt / G5			3 Triple
	43 1 x 39 Watt HO / G5	* Accent Downlight	* Cable Support	D Dimming
	432 2 x 39 Watt HO / G5	00 NONE	03 Option: S-1	2D Dual Dimming
	433 3 x 39 Watt HO / G5	80 1 x 50 Watt MR16 / GU5.3 <i>*Please specify spacing and location</i>	04 Option: S-2	EM Emergency Ballast
	434 4 x 39 Watt HO / G5	91 1 x 39 Watt MR16, MH / GX10 <i>*Please Specify spacing and location</i>		
	44 1 x 28 Watt / G5	MS Monopoint Steng Socket <i>*Please specify spacing and location</i>		* Finish
	442 2 x 28 Watt / G5			16 Clear Anodized Aluminum
	443 3 x 28 Watt / G5			21 Painted White
	444 4 x 28 Watt / G5			22 Painted Custom Color
	446 6 x 28 Watt / G5	<i>* Consult the factory for LED lamping options</i>		
	448 8 x 28 Watt / G5			
	45 1 x 54 Watt HO / G5			
	452 2 x 54 Watt HO / G5			
	453 3 x 54 Watt HO / G5			
	454 4 x 54 Watt HO / G5			
	456 6 x 54 Watt HO / G5			
	458 8 x 54 Watt HO / G5			

** Consult the factory for LED lamping options*


Series	Fixture Length	Uplight Lamping	Uplight Diffuser	Uplight Reflector	Downlight Lamping	Downlight Diffuser	Downlight Reflector	Accent Downlight	Suspension/ Mounting	Cable Support / Power Feed	Cable Support	Voltage	Circuit	Finish

clearline

CEILING

The ClearLine ceiling is an elegant and refined option for direct illumination in offices or hallways.


Consult factory for
LED options

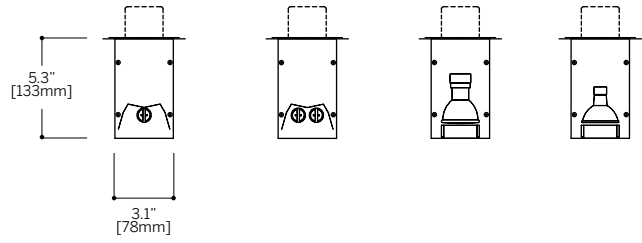



clearline PENDANT


The ClearLine pendant is an elegant and refined option for direct and indirect illumination in offices or reception desks. Adjustable accent downlights are provided with independent aiming mechanism. ClearLine pendant mounts via aircraft cable. The mounting height is adjusted without tools.

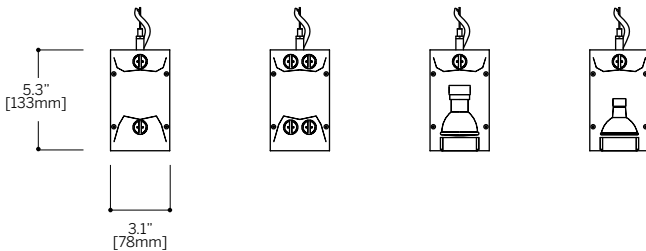


Consult factory for LED options






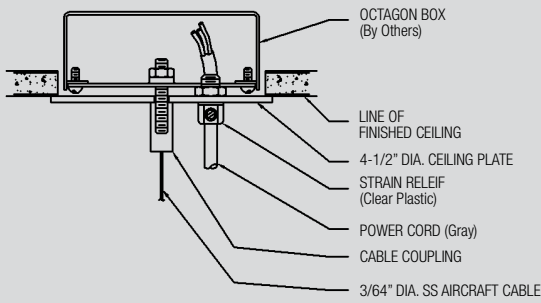


STANDARD SUPPORT CABLE/FEED
OPTION: WS-1

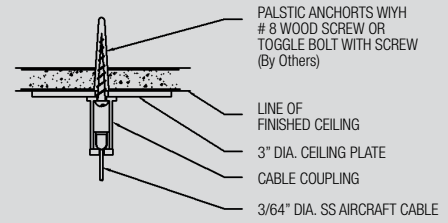

SUPPORT CABLE, OPTION: S-1

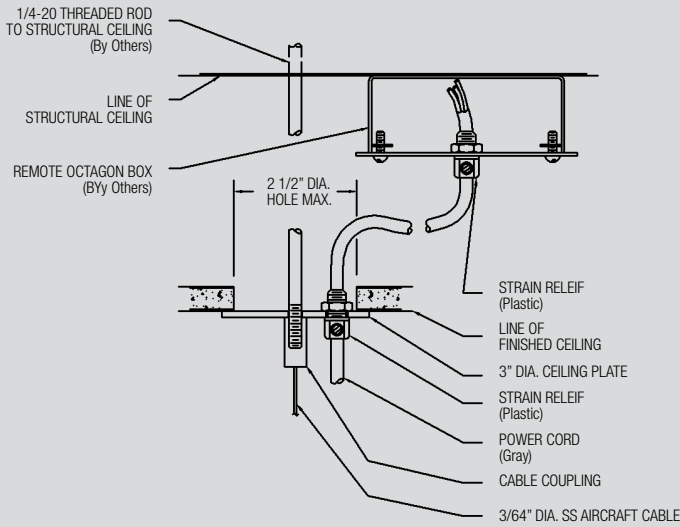

OPTIONAL SUPPORT CABLE/FEED
OPTION: WS-2

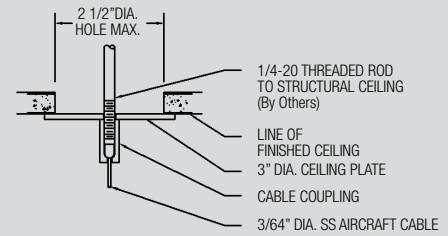

SUPPORT CABLE, OPTION: S-2

CEILING PLATE AVAILABLE IN:
Clear Anodized ALUMINIUM - TO MACH FIXTURE - STANDARD
CUSTOM COLOR - SELECT FROM STANDARDS

NOTE:
* CABLE COUPLINGS ARE AVAILABLE IN NICKEL FINISH ONLY
* SUPPORT CABLE AND POWER CORD 50" LONG - STANDARD

