

# Aline 70

SURFACE



## SPECIFICATION SHEET

### Aline 70



#### Model 1550

#### Type

S Surface

#### Size

|        |                |
|--------|----------------|
| 48     | 49.1" [1246mm] |
| 60     | 60.9" [1547mm] |
| 72     | 72.8" [1848mm] |
| 84     | 84.6" [2149mm] |
| Custom |                |

#### Wattage<sup>1,2</sup>

#### 48"

L 12W (1600lm)  
M 24W (2970lm)

#### 60"

L 15W (2000lm)  
M 30W (3715lm)

#### 72"

L 18W (2400lm)  
M 36W (4460lm)

#### 84"

L 21W (2800lm)  
M 42W (5200lm)

#### Color Temp<sup>3</sup>

|    |      |
|----|------|
| 30 | 3000 |
| 35 | 3500 |
| 40 | 4000 |

#### Voltage

2 220/240 Volt

#### Driver

RD Remote

#### Control - RD

|      |           |
|------|-----------|
| S    | Non-dim   |
| D010 | 0-10V     |
| DALI | DALI      |
| SWD  | SwitchDIM |

#### Diffuser Bottom

SW Satin opal acrylic

#### Finish


|    |                                |
|----|--------------------------------|
| 16 | Clear anodized aluminum        |
| 21 | Painted white - RAL 9010 matte |
| 26 | Painted black - RAL 9005 matte |
| 22 | Painted custom color           |

#### Notes

- 1 Nominal lumens value specified
- 2 Linear LED board, constant voltage 24 Volt
- 3 90+ CRI standard

#### Example fixture number:

1550 - S - 48 - L - 30 - 2 - RD - S - SW - 16

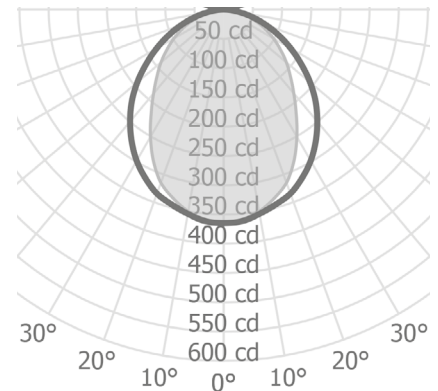

# Aline 70

## SURFACE

A clean design and simple technical details are the design principles of the Aline 70 lighting system. Suitable for conference spaces and office areas.



| Size   |                |
|--------|----------------|
| 48     | 49.1" [1246mm] |
| 60     | 60.9" [1547mm] |
| 72     | 72.8" [1848mm] |
| 84     | 84.6" [2149mm] |
| Custom |                |



- \* 70mm x 70mm fixture body profile
- \* Continuous fixture with hairline fixture segments connection
- \* Fixture is ADA compliant

# Aline 70

SURFACE



## SPECIFICATION SHEET

Aline 70



Remote driver(s)  
Order separately

