

Aura

PENDANT



SPECIFICATION SHEET

Aura



Model 1520

Type

P Pendant

Size

15	15.6" [396mm]
18	18.6" [472mm]
22	22.6" [574mm]
25	25.6" [651mm]
30	30.0" [763mm]
36	36.0" [915mm]
Custom	

Wattage ^{1,2}

15"

L 8W (1065lm)
M 16W (1980lm)

18"

L 11W (1465lm)
M 22W (2725lm)

22"

L 21W (2800lm)
M 42W (5200lm)

25"

L 27W (3600lm)
M 54W (6690lm)

30"

L 40W (5335lm)
M 80W (9905lm)

36"

L 65W (8665lm)

Color Temp ³

30	3000
35	3500
40	4000

Voltage

2 220/240 Volt

Driver ^{4,5}

RD Remote
ID Integral

Control - RD

S Non-dim
D010 0-10V
DALI DALI
SWD SwitchDIM
X If integral driver is selected

Control - ID

S Non-dim
D010 0-10V
DALI DALI
SWD SwitchDIM
X If remote driver is selected

Diffuser Bottom

SW Satin opal acrylic

Diffuser Top

SW Satin opal acrylic

Finish ⁶

19 Painted anodized aluminum - RAL 9006 matte
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Mounting

CE Center canopy

Power Cable ⁷


CC Clear insulated cable (standard)
WC White cable
BC Black cable

Notes

- 1 Nominal lumens value specified
- 2 Linear LED board, constant voltage 24 Volt
- 3 90+ CRI standard
- 4 Remote driver for 15" and 18" sizes
- 5 Integral or remote driver for 22", 25", 30" and 36" sizes
- 6 Canopy finish matches housing
- 7 96" standard cable length

Example fixture number:

1520 - P - 25 - L - 30 - 2 - ID - X - S - SW - SW
- 19 - CE - CC

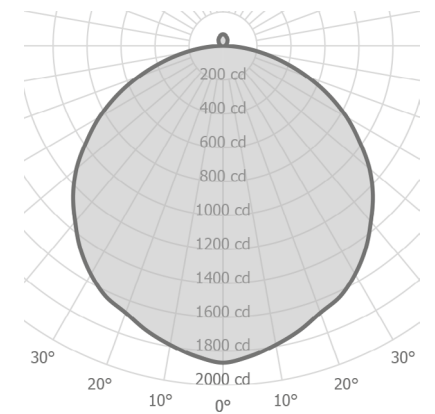

Aura

PENDANT

Aura is best used as workspace task lighting and general room illumination. Direct lighting with an indirectly illuminated ring of light around the fixture. By combining different luminaire diameters in staggered suspension heights, large-area, creative lighting solutions can be achieved.



Size	
15	15.6" [396mm]
18	18.6" [472mm]
22	22.6" [574mm]
25	25.6" [651mm]
30	30.0" [763mm]
36	36.0" [915mm]
Custom	



* 65mm bottom diffuser profile




Aura

PENDANT



SPECIFICATION SHEET

Aura

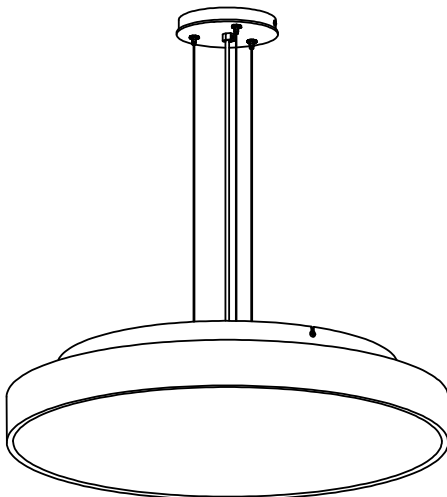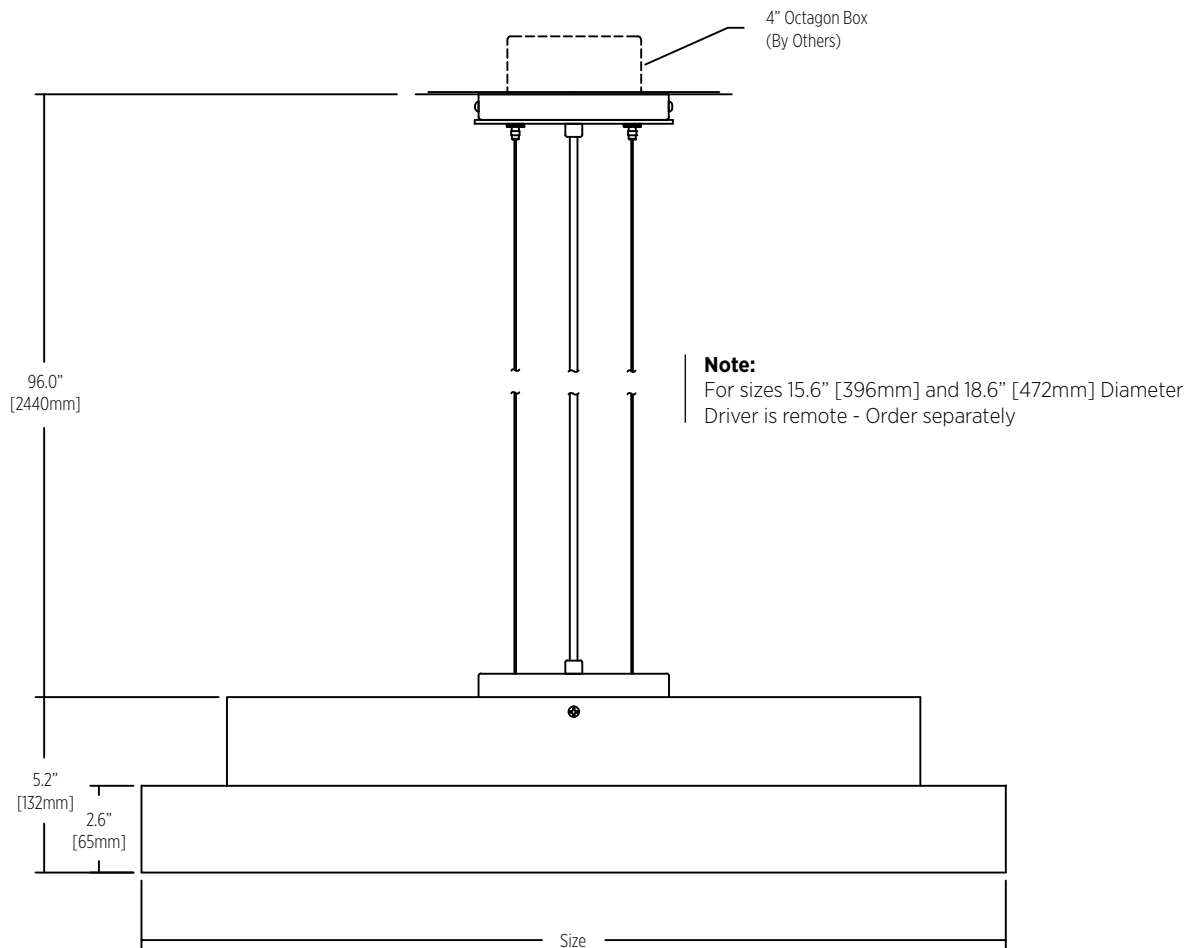

Center canopy
5.9" [150mm] Dia. x 0.9" [22mm] deep

Fixture mounts directly to 4" octagon
box - supplied and installed by others