

Aura

SURFACE



SPECIFICATION SHEET

Aura



Model 1520

Type

S Surface

Size

15	15.6" [396mm]
18	18.6" [472mm]
22	22.6" [574mm]
25	25.6" [651mm]
30	30.0" [763mm]
36	36.0" [915mm]

Custom

Wattage^{1,2}

15"

L 8W (1065lm)
M 16W (1980lm)

18"

L 11W (1465lm)
M 22W (2725lm)

22"

L 21W (2800lm)
M 42W (5200lm)

25"

L 27W (3600lm)
M 54W (6690lm)

30"

L 40W (5335lm)
M 80W (9905lm)

36"

L 65W (8665lm)

Color Temp³

30	3000
35	3500
40	4000

Voltage

2 220/240 Volt

Driver^{4,5}

RD Remote
ID Integral

Control - RD

S Non-dim
D010 0-10V
DALI DALI
SWD SwitchDIM
X If integral driver is selected

Control - ID

S Non-dim
D010 0-10V
DALI DALI
SWD SwitchDIM
X If remote driver is selected

Diffuser Bottom

SW Satin opal acrylic

Diffuser Top

SW Satin opal acrylic

Finish


19 Painted anodized aluminum - RAL 9006 matte
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Notes

1 Nominal lumens value specified
2 Linear LED board, constant voltage 24 Volt
3 90+ CRI standard
4 Remote driver for 15" and 18" sizes
5 Integral or remote driver for 22", 25", 30" and 36" sizes

Example fixture number:

1520 - S - 25 - L - 30 - 2 - ID - X - S - SW - SW - 19

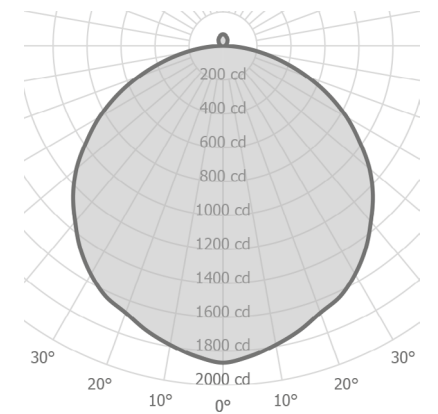

Aura

SURFACE

Aura was designed and engineered to achieve visual comfort in every kind of workplace. Direct lighting with an indirectly illuminated ring around the fixture. The design of the luminaire is particularly popular and is especially suitable for meeting rooms.



Size	
15	15.6" [396mm]
18	18.6" [472mm]
22	22.6" [574mm]
25	25.6" [651mm]
30	30.0" [763mm]
36	36.0" [915mm]
Custom	



* 65mm bottom diffuser profile



Aura

SURFACE



SPECIFICATION SHEET

Aura

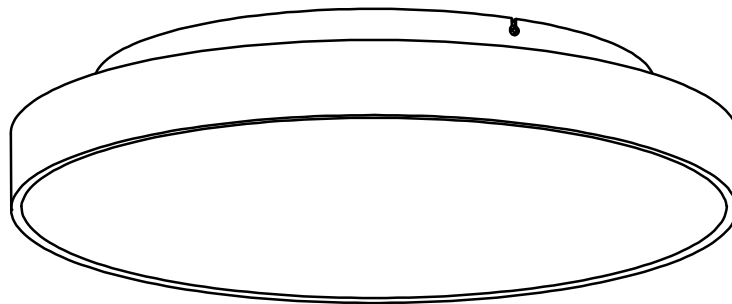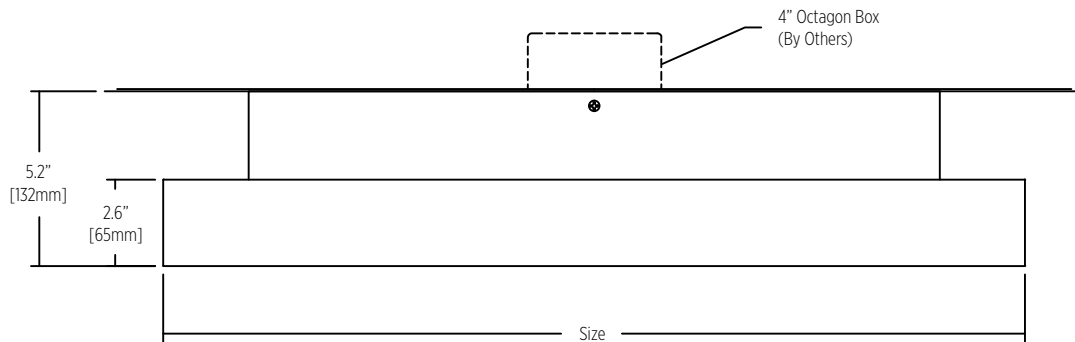

Note:

- * For sizes 15.6" [396mm] and 18.6" [472mm] Diameter Driver is remote - Order separately
- * For sizes 22.6" [573mm] and larger, there are additional holes in the mounting box (panel) for secure installation (mounting hardware provided)
See Installation Instructions for details