

# Ciro SQ

CEILING



## SPECIFICATION SHEET

### Ciro SQ



#### Model 1280

**Type**  
C Ceiling

**Size**  
7 7.0" [178mm]  
12 12.0" [305mm]  
Custom

#### Wattage<sup>1,2</sup>

M 8.4W (1310lm)  
H 12.6W (1710lm)

#### Color Temp<sup>3</sup>

30 3000  
35 3500  
40 4000

#### Voltage

2 220/240 Volt

#### Driver

RD Remote  
ID Integral

#### Control - RD

S Non-dim  
D010 0-10V  
DALI DALI  
PCD Phase-cut (TRIAC)  
X If integral driver is selected

#### Control - ID

S Non-dim  
D010 0-10V  
X If remote driver is selected

#### Diffuser

SA Satin clear acrylic

#### Finish


19 Painted anodized aluminum -  
RAL 9006 matte  
21 Painted white - RAL 9010 matte  
26 Painted black - RAL 9005 matte  
22 Painted custom color

#### Notes

- 1 Nominal lumens value specified
- 2 Downlight LED module,  
constant current 18 Volt  
500 mA - 8.4 W, 700 mA - 12.6 W
- 3 90+ CRI standard

#### Example fixture number:

1280 - C - 7 - M - 30 - 2 - ID - X - S - SA - 19

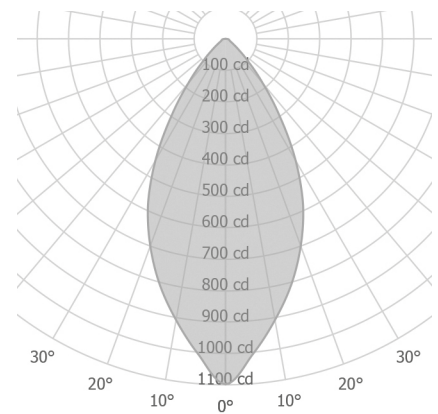

# Ciro SQ

## CEILING

Downlight fixture with clean design and machined aluminum construction.   
Ciro's square shape gives essential elements to architectural areas.



Size	
7	7" [178mm]
12	12" [305mm]
Custom	



\* 100mm square fixture body  
\* Available in 7" [178mm] and 12" [305mm] long body

# Ciro SQ

CEILING



## SPECIFICATION SHEET

Ciro SQ

