Ciro SQ

PENDANT



SPECIFICATION SHEET

Ciro SQ

Model 1280 Type P Pendant Size 7 7.0" [178mm] 12 12.0" [305mm] Custom

Wattage^{1,2} M 8.4W (1310lm) H 12.6W (1710lm)

Color Temp ³		
30	3000	
35	3500	
40	4000	

Voltage	
2	220/240 Volt

Driver	
RD	Remote
ID	Integral

Control - RD	
S	Non-dim
D010	0-10V
DALI	DALI
PCD	Phase-cut (TRIAC)
Χ	If integral driver is selected

Control - ID	
S	Non-dim
D010	0-10V

X If remote driver is selected

Diffuser SA	Satin clear acrylic
Finish ⁴	Painted anodized aluminum -

	RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Dainted custom color

DAL 0000 mastes

Mounting PC Power cable

Power (Cable ⁵
CC	Clear insulated cable (standard)


WC	White cable
BC	Black cable

Notes	
1	Nominal lumens value specified
2	Downlight LED module,
	constant current 18 Volt
	500 mA - 8.4 W, 700 mA - 12.6 W
3	90+ CRI standard
4	Canopy finish matches housing
5	96" standard power cable length

Example fixture number:

1280 - P - 7 - M - 30 - 2 - ID - X - S - SA - 19 - PC - CC






Ciro SQ

PENDANT

Sleek and clean are words that describe Ciro SQ. It's contribution as a design element can offer many statements. All elements are solid machined aluminum construction.








12 12" [305mm] Custom



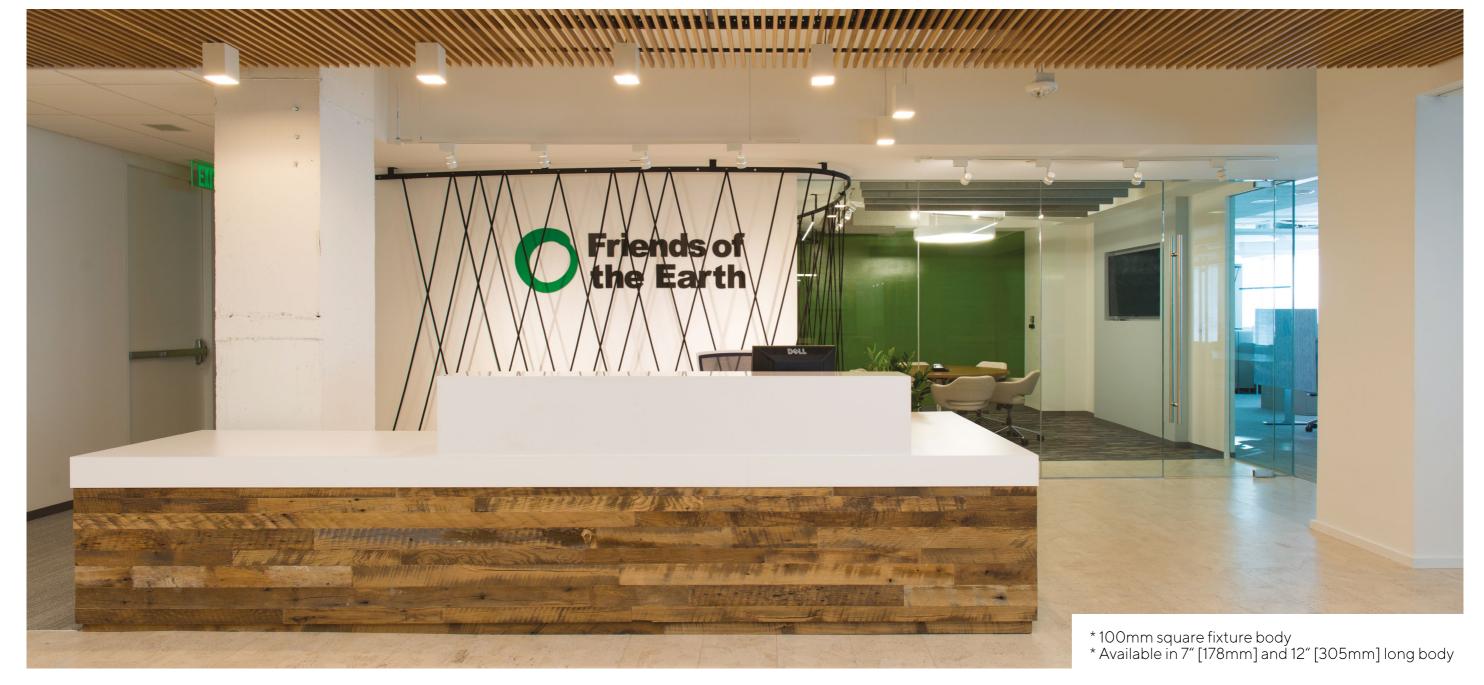

Ciro SQ

PENDANT




SPECIFICATION SHEET

Ciro SQ




INSTALLATION TYPE


Straight power cable with integral driver

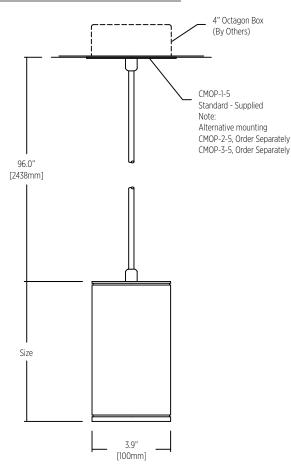



CMOP-1-5 Standard - Supplied





Mounting Option Power 1-5 Octagon Box (By Others) Installed in drywall, wood or concrete ceiling



PENDANT




SPECIFICATION SHEET


Ciro SQ



ALTERNATIVE MOUNTING OPTION


CMOP-2-5 Order Separately





Mounting Option Power 2-5 65mm Diameter Box (By Others) Installed in drywall, wood or concrete ceiling

CMOP-3-5 Order Separately





Mounting Option Power 3-5 Suspension Assembly Installed in drywall or wood ceiling

www.almlighting.com 2