

City Indoor

WALL



SPECIFICATION SHEET

City Indoor



Model 1825

Type

W Wall

Size

27	27.0" [686mm]
39	39.0" [991mm]
51	51.0" [1295mm]
63	63.0" [1600mm]
Custom	

Wattage ^{1,2}

27"
L 5W (665lm)
M 10W (1240lm)
39"
L 8W (1065lm)
M 16W (1980lm)
51"
L 11W (1465lm)
M 22W (2725lm)
63"
L 14W (1865lm)
M 28W (3465lm)

Color Temp ³

30	3000
35	3500
40	4000

Voltage

2 220/240 Volt

Driver

RD Remote

Control - RD

S	Non-dim
D010	0-10V
DALI	DALI
SWD	SwitchDIM

Diffuser

SA Satin clear acrylic

Finish


19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Notes

- 1 Nominal lumens value specified
- 2 Linear LED board, constant voltage 24 Volt
- 3 90+ CRI standard

Example fixture number:

1825 - W - 39 - L - 30 - 2 - RD - S - SA - 19

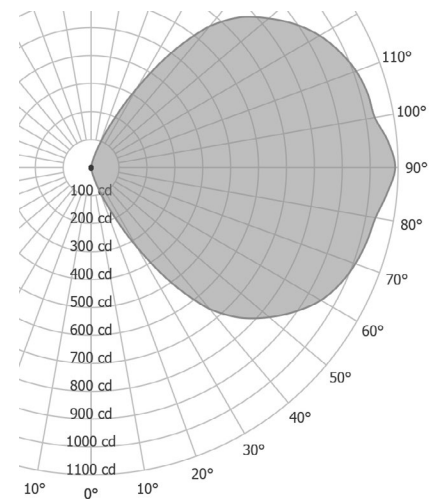

City Indoor

WALL

Emits soft, diffused indirect light. Creates suitable illumination for hallways and stairs. The simple clean lines of the fixture are an ideal solution for interior architectural structures. Wall mounted, vertically or horizontally oriented with indirect LED lighting.



Size	
27	27" [686mm]
39	39" [991mm]
51	51" [1,295mm]
63	63" [1,600mm]
Custom	



* 50mm wide extruded aluminum profile
* Fixture is ADA compliant

City Indoor

WALL



SPECIFICATION SHEET

City Indoor

