

# City Outdoor



WALL

## SPECIFICATION SHEET

### City Outdoor



#### Model 1825WL <sup>1</sup>

##### Type

W Wall

##### Size

27	27.0" [686mm]
39	39.0" [991mm]
51	51.0" [1295mm]
63	63.0" [1600mm]
Custom	

##### Wattage <sup>2,3</sup>

27"	L 8W (765lm)
39"	L 12W (1,225lm)
51"	L 17W (1,685lm)
63"	L 21W (2,140lm)

##### Color Temp <sup>4</sup>

30	3000
35	3500
40	4000

##### Voltage

2 220/240 Volt

##### Driver

RD Remote

##### Control - RD

S	Non-dim
D010	0-10V
DALI	DALI
SWD	SwitchDIM

##### Diffuser

SA Satin clear acrylic

##### Finish


19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

##### Notes

- 1 Suitable for wet location, IP65 rated LED tape
- 2 Nominal lumens value specified
- 3 LED tape, constant voltage 24 Volt
- 4 90+ CRI standard

##### Example fixture number:

1825WL - W - 39 - L - 30 - 2 - RD - S - SA - 19

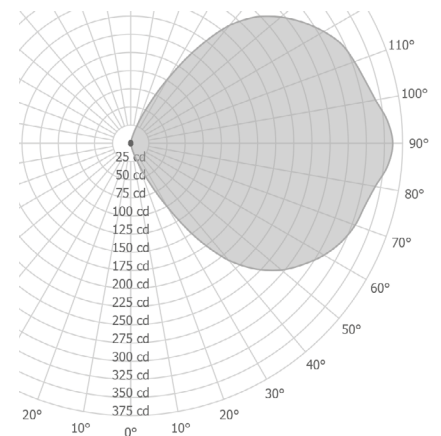

# City Outdoor

## WALL

The simple clean lines of the fixture are an ideal solution for any style of architecture. Wall mounted, vertically or horizontally oriented, this outdoor-rated luminaire is perfect for an accent or entrance application. The cutting-edge technology and construction techniques are used to manufacture this geometrically simple form. Ideal illumination for architectural entrances or hallways.



Size	
27	27" [686mm]
39	39" [991mm]
51	51" [1295mm]
63	63" [1600mm]
Custom	



\* 50mm wide extruded aluminum profile  
\* Fixture is ADA compliant

# City Outdoor

WALL



## SPECIFICATION SHEET

City Outdoor

