

ClearLine

CEILING



SPECIFICATION SHEET

ClearLine



Model CL2

Type

C Ceiling

Size

36	36.0" [914mm]
48	48.0" [1219mm]
60	60.0" [1524mm]
72	72.0" [1829mm]
96	96.0" [2438mm]
Custom	

Wattage^{1,2}

36"

L 9W (1200lm)
M 18W (2230lm)

48"

L 12W (1600lm)
M 24W (2970lm)

60"

L 15W (2000lm)
M 30W (3715lm)

72"

L 18W (2400lm)
M 36W (4460lm)

96"

L 24W (3200lm)
M 48W (5945lm)

Color Temp³

30	3000
35	3500
40	4000

Voltage

2 220/240 Volt

Driver

RD Remote
ID Integral

Control - RD

S Non-dim
D010 0-10V
DALI DALI
SWD SwitchDIM
X If integral driver is selected

Control - ID

S Non-dim
D010 0-10V
DALI DALI
SWD SwitchDIM
X If remote driver is selected

Diffuser Bottom

SW Satin opal acrylic

Finish



16 Clear anodized aluminum
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Notes

- 1 Nominal lumens value specified
- 2 Linear LED board, constant voltage 24 Volt
- 3 90+ CRI standard

Example fixture number:


CL2 - C - 48 - L - 30 - 2 - ID - X - S - SW - 16

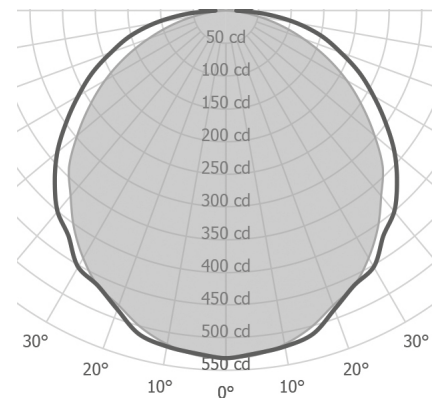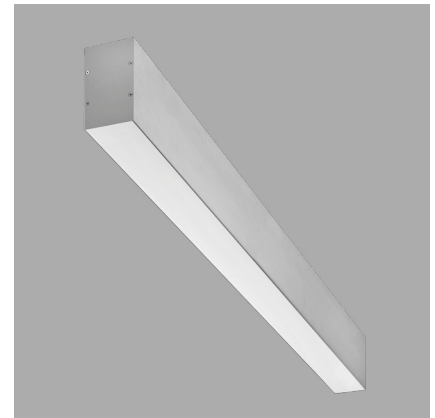

ClearLine

CEILING

ClearLine Ceiling is a clean, linear form for general illumination. A clean, elegant design and simple technical details are the design principles of the ClearLine profile lighting system. A Satin Acrylic lens provides soft diffused light.

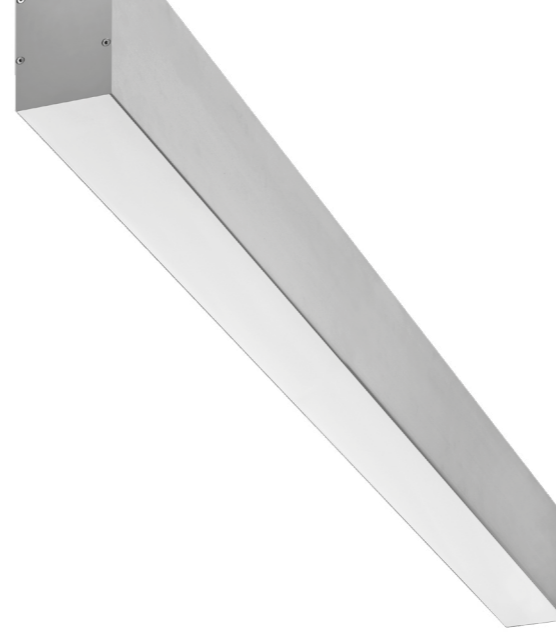

Size	
36	36" [914mm]
48	48" [1,219mm]
60	60" [1,524mm]
72	72" [1,829mm]
96	96" [2,438mm]
Custom	



* 78mm x 133mm fixture body profile
* Continuous fixture with hairline fixture segments connection

ClearLine

CEILING



SPECIFICATION SHEET

ClearLine

