

ClearLine

WALL



SPECIFICATION SHEET

ClearLine



Model CL2

Type

W Wall

Size

36	36.0" [914mm]
48	48.0" [1219mm]
60	60.0" [1524mm]
72	72.0" [1829mm]
96	96.0" [2438mm]
Custom	

Wattage ^{1,2}

Direct ³

36"

LD 9W (1200lm)
MD 18W (2230lm)

48"

LD 12W (1600lm)
MD 24W (2970lm)

60"

LD 15W (2000lm)
MD 30W (3715lm)

72"

LD 18W (2400lm)
MD 36W (4460lm)

96"

LD 24W (3200lm)
MD 48W (5945lm)

XD - No Direct

Indirect ⁴

LI 9W (1200lm)
MI 18W (2230lm)

LI 12W (1600lm)
MI 24W (2970lm)

LI 15W (2000lm)
MI 30W (3715lm)

LI 18W (2400lm)
MI 36W (4460lm)

LI 24W (3200lm)
MI 48W (5945lm)

XI - No Indirect

Color Temp ⁵

30	3000
35	3500
40	4000

Voltage

2 220/240 Volt

Driver

RD Remote
ID Integral

Control - RD

S Non-dim
D010 0-10V
DALI DALI
SWD SwitchDIM
X If integral driver is selected

Control - ID

S Non-dim
D010 0-10V
DALI DALI
SWD SwitchDIM
X If remote driver is selected

Diffuser Bottom

SW Satin opal acrylic
CB Extruded aluminum - painted to match the fixture

Diffuser Top

SA Satin clear acrylic
CT Extruded aluminum - painted to match the fixture

Finish

16 Clear anodized aluminum
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Circuit


CS Circuit - Single
CD Circuit - Dual

Notes

- 1 Nominal lumens value specified
- 2 Linear LED board, constant voltage 24 Volt
- 3 For no Direct light specify XD
- 4 For no Indirect light specify XI
- 5 90+ CRI standard

Example fixture number:

CL2 - W - 48 - LD - LI - 30 - 2 - ID - X - S - SW - SA - 16 - CS

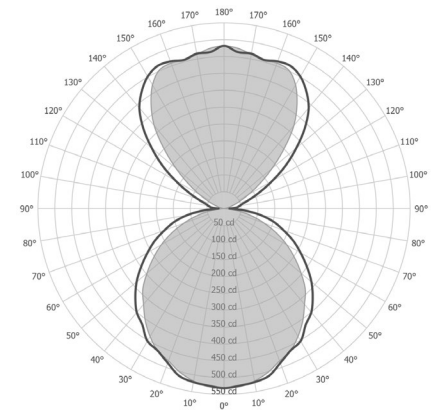

ClearLine

WALL

The ClearLine Wall is a simple linear lighting option for ambient illumination in public or private spaces providing both direct and indirect lighting performance.

ClearLine is a flexible system that easily adapts itself to different types of situations and architectural spaces.



Size	
36	36" [914mm]
48	48" [1,219mm]
60	60" [1,524mm]
72	72" [1,829mm]
96	96" [2,438mm]
Custom	



- * 78mm x 133mm fixture body profile
- * Continuous fixture with hairline fixture segments connection
- * Fixture is ADA compliant

ClearLine

WALL



SPECIFICATION SHEET

ClearLine

