

# Delta 50

PENDANT



## SPECIFICATION SHEET

Delta 50



### Model 1771

#### Type

P Pendant

#### Size

26	26.4" [670mm]
38	38.2" [971mm]
50	50.0" [1271mm]
Custom	

#### Wattage <sup>1,2</sup>

26"	L 6W (800lm)
	M 12W (1485lm)
38"	L 9W (1200lm)
	M 18W (2230lm)
50"	L 12W (1600lm)
	M 24W (2970lm)

#### Color Temp <sup>3</sup>

30	3000
35	3500
40	4000

#### Voltage

2 220/240 Volt

#### Driver

RD Remote

#### Control - RD

S	Non-dim
D010	0-10V
DALI	DALI
SWD	SwitchDIM

#### Diffuser

SA Satin clear acrylic

#### Finish <sup>4</sup>

19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

#### Mounting

PC Power cable

#### Power Cable <sup>5</sup>


CC Clear insulated cable

#### Notes

- 1 Nominal lumens value specified
- 2 Linear LED board, constant voltage 24 Volt
- 3 90+ CRI standard
- 4 Canopy finish matches housing
- 5 96" standard power cable length

#### Example fixture number:

1771 - P - 38 - L - 30 - 2 - RD - S - SA - 19 - PC - CC

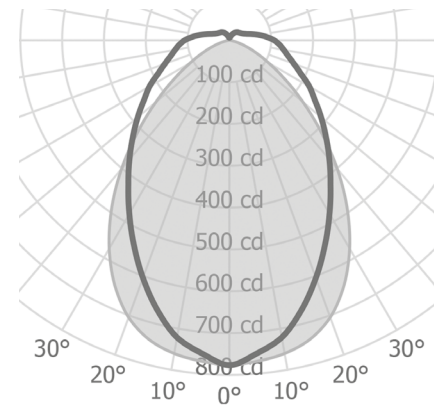

# Delta 50

## PENDANT

Suspended or surface luminaire with extruded aluminum housing and machined end caps.

The diffuser is Satin Clear Acrylic. Ideal for individual uses or in a series for office areas.



Size	
26	26.4" [670mm]
38	38.2" [971mm]
50	50.0" [1,271mm]
Custom	



\* 50mm diameter fixture diffuser profile

# Delta 50

PENDANT




## SPECIFICATION SHEET

Delta 50





### INSTALLATION TYPE

Straight power cables with remote driver

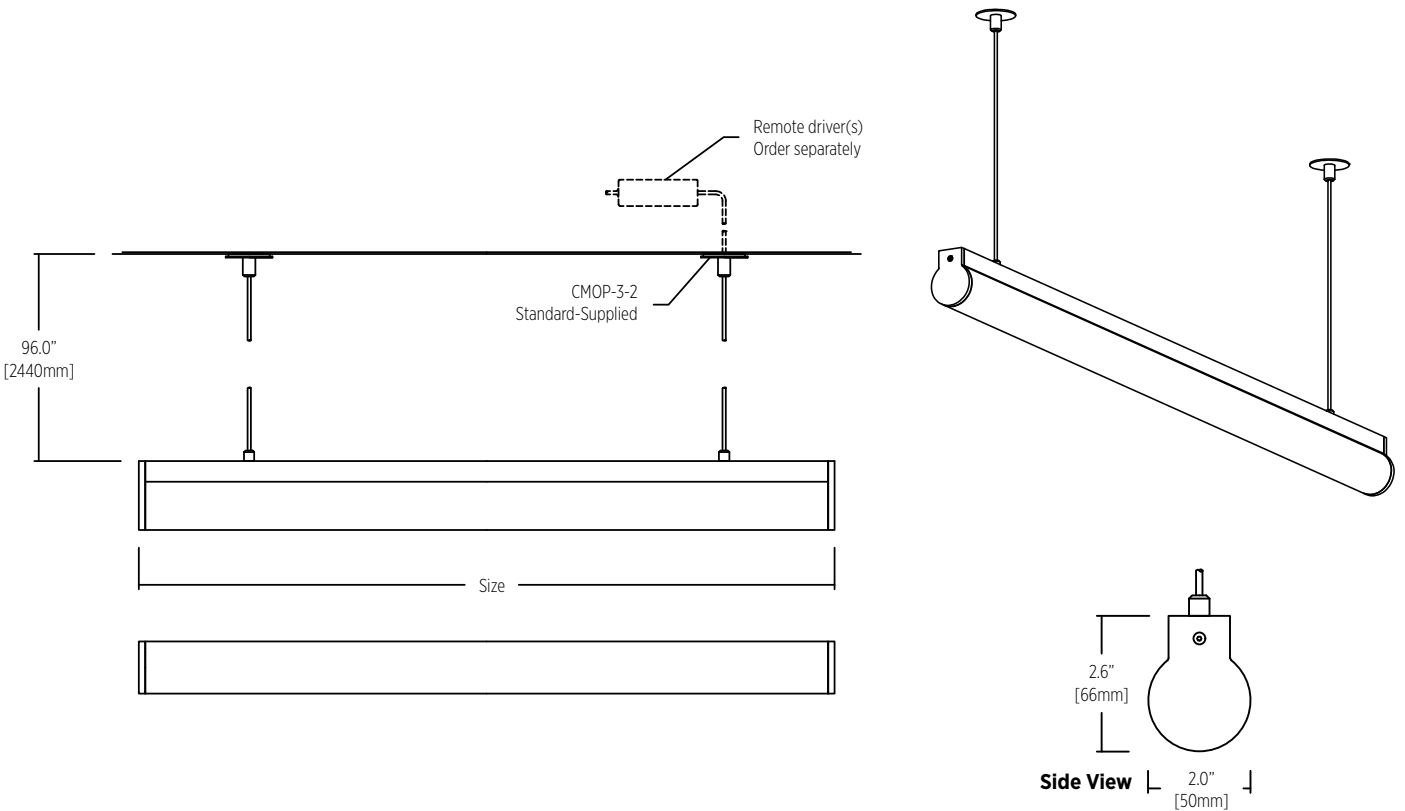

### CMOP-3-2 Standard - Supplied

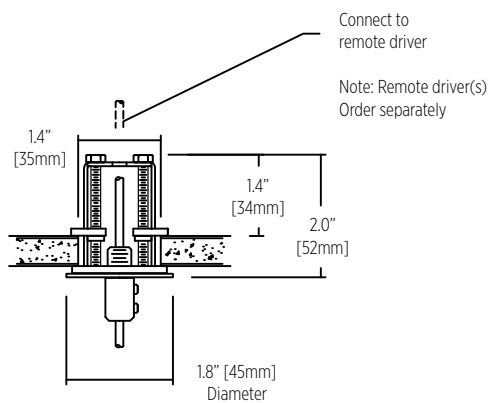

Mounting Option Power 3-2  
Suspension Assembly  
Installed in drywall or wood ceiling