

Eclipse 50

SURFACE



SPECIFICATION SHEET

Eclipse 50



Model 1670

Type

S Surface

Size

24	24.8" [631mm]
36	36.3" [921mm]
48	47.7" [1211mm]
60	59.1" [1500mm]
72	70.5" [1790mm]

Custom

Wattage ^{1,2}

24"

L 18W (2400lm)
M 36W (4460lm)

36"

L 27W (3600lm)
M 54W (6685lm)

48"

L 36W (4800lm)
M 72W (8915lm)

60"

L 45W (6000lm)
M 90W (11145lm)

72"

L 54W (7200lm)
M 108W (13375lm)

Color Temp ³

30	3000
35	3500
40	4000

Voltage

2 220/240 Volt

Driver

RD Remote

Control - RD

S	Non-dim
D010	0-10V
DALI	DALI
SWD	SwitchDIM

Diffuser Bottom

SW Satin opal acrylic

Finish


19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Notes

- 1 Nominal lumens value specified
- 2 Linear LED board, constant voltage 24 Volt
- 3 90+ CRI standard

Example fixture number:

1670 - S - 24 - L - 30 - 2 - RD - S - SW - 19

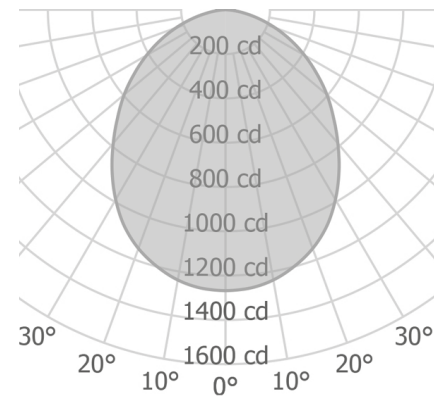

Eclipse 50

SURFACE

Eclipse 50 is available in pendant and surface versions. Offered in a wide variety of standard diameters and lumen packages, the luminaire is available for as much modification as your imagination will allow, including ovals and squares.



Size

24	24.8" [631mm]
36	36.3" [921mm]
48	47.7" [1,211mm]
60	59.1" [1,500mm]
72	70.5" [1,790mm]
Custom	



* 50mm x 50mm fixture body profile

Eclipse 50

SURFACE



SPECIFICATION SHEET

Eclipse 50

