

# Frame 70

PENDANT



## SPECIFICATION SHEET

### Frame 70



#### Model 1545

##### Type

P Pendant

##### Size

24 24.0" [610mm]  
36 36.0" [914mm]  
48 48.0" [1219mm]  
Custom

##### Wattage <sup>1,2</sup>

##### 24"

L 20W (2665lm)  
M 40W (4955lm)

##### 36"

L 32W (4265lm)  
M 64W (7925lm)

##### 48"

L 44W (5865lm)  
M 88W (10895lm)

##### Color Temp <sup>3</sup>

30 3000  
35 3500  
40 4000

##### Voltage

2 220/240 Volt

##### Driver

RD Remote  
ID Integral (in canopy)

##### Control - RD

S Non-dim  
D010 0-10V  
DALI DALI  
SWD SwitchDIM  
X If integral driver is selected

##### Control - ID (in canopy - if selected)

S Non-dim  
D010 0-10V  
DALI DALI  
X If remote driver is selected

#### Diffuser Bottom

SW Satin opal acrylic

#### Finish <sup>4</sup>

16 Clear anodized aluminum  
21 Painted white - RAL 9010 matte  
26 Painted black - RAL 9005 matte  
22 Painted custom color

#### Mounting

SCRD Straight cables - remote driver  
SCID Straight cables - driver in canopy  
CERD Center canopy - remote driver  
CEID Center canopy - driver in canopy

#### Power Cable <sup>5</sup>


CC Clear insulated cable (standard)  
WC White cable  
BC Black cable

#### Notes

- 1 Nominal lumens value specified
- 2 Linear LED board, constant voltage 24 Volt
- 3 90+ CRI standard
- 4 Canopy finish matches housing  
For Clear anodized aluminum finish,  
canopy finish will be painted  
anodized aluminum
- 5 96" standard cable length

#### Example fixture number:

1545 - P - 36 - L - 30 - 2 - RD - S - X - SW - 16  
- SCR D - CC

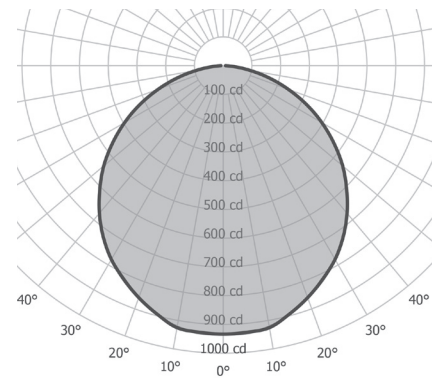

# Frame 70

PENDANT

Frame 70 is ideal for lighting office areas and conference spaces when used in multiple configurations. Aluminum construction allows the flexibility to be altered as your imagination allows.



Size	
24	24" [610mm]
36	36" [915mm]
48	48" [1,219mm]
Custom	



\* 70mm x 70mm fixture body profile  
\* Straight cables or center canopy mounting options available

# Frame 70



PENDANT




## SPECIFICATION SHEET

Frame 70





### INSTALLATION TYPE

#### Straight cables with remote driver

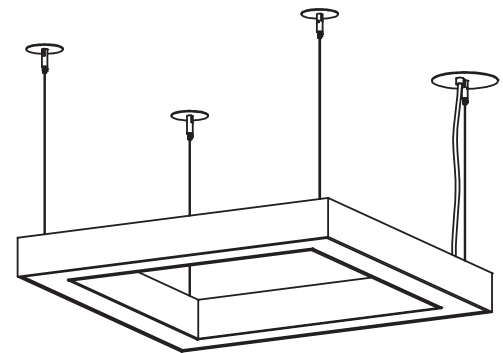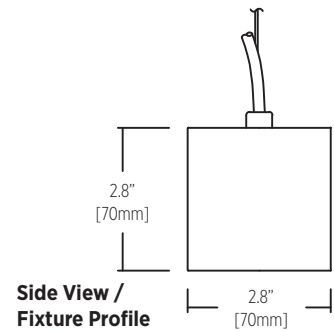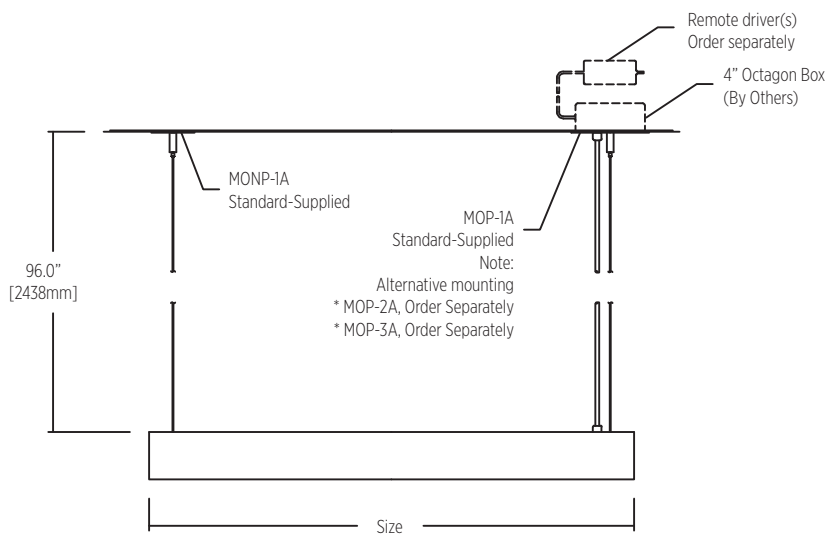

**Note:**  
See page 3 & 4 for mounting options

#### Straight cables with surface mounted canopy with integral driver

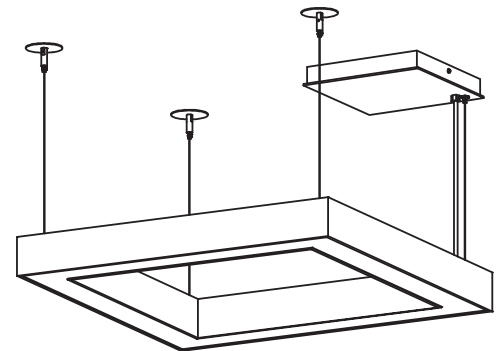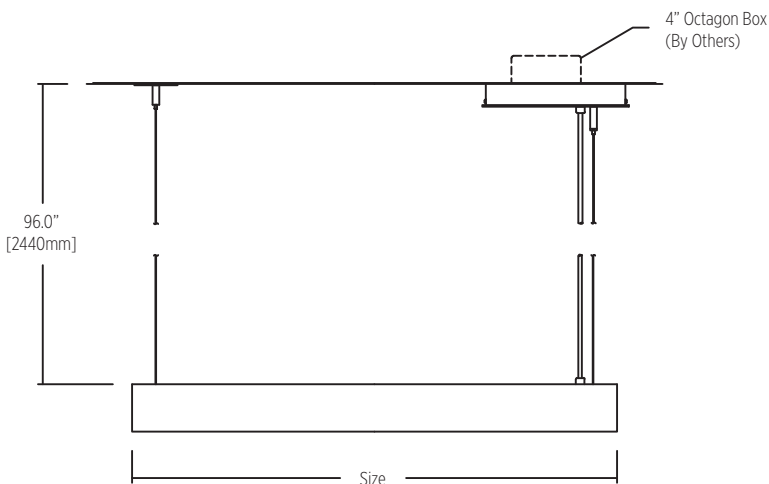

**Note:**  
Surface mounted canopy with  
integral driver - Order separately

# Frame 70

PENDANT




## SPECIFICATION SHEET


### Frame 70





#### Center canopy with remote driver

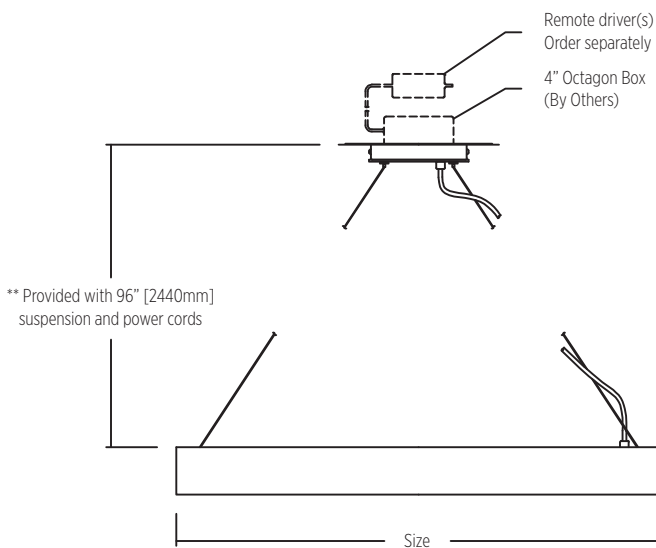


**Center canopy**  
**5.9" [150mm] Sq. x 0.9" [22mm] deep**  
Fixture mounts directly to 4" octagon box - supplied and installed by others

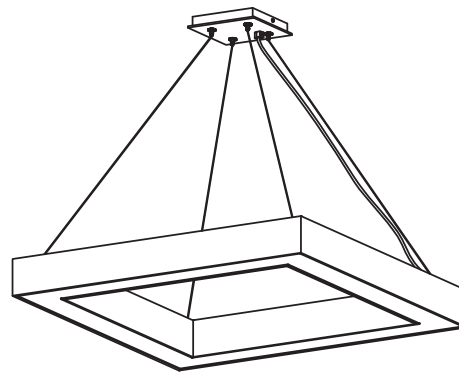

#### Center canopy with integral driver

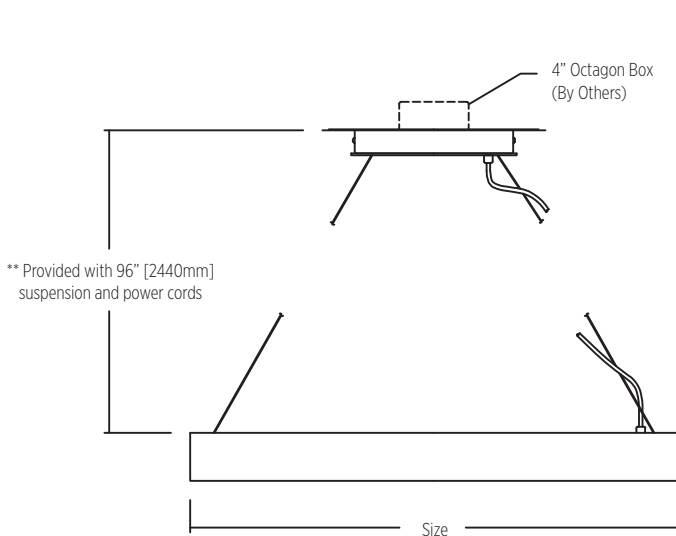

**Center canopy with integral driver**  
**10.5" [267mm] Sq. x 1.9" [49mm] deep**  
Canopy mounts directly to the ceiling.  
Mounting hardware provided.  
Optional mounting holes for 4" octagon box - provided. 4" octagon box - supplied and installed by others

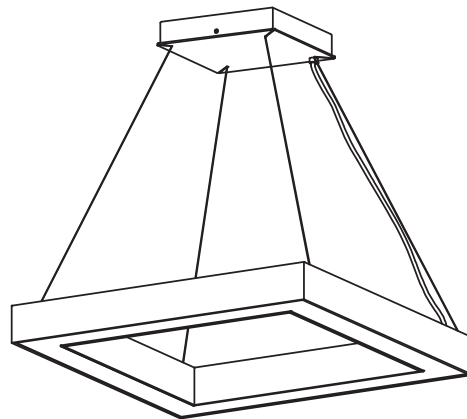

#### Minimum mounting height per fixture size for center canopy options:

Fixture Size (Diameter)	Minimum Mounting Height
24" [610mm]	15" [380mm]
36" [914mm]	20" [510mm]
48" [1,219mm]	30" [760mm]

# Frame 70

PENDANT




## SPECIFICATION SHEET

Frame 70




Multiple configuration

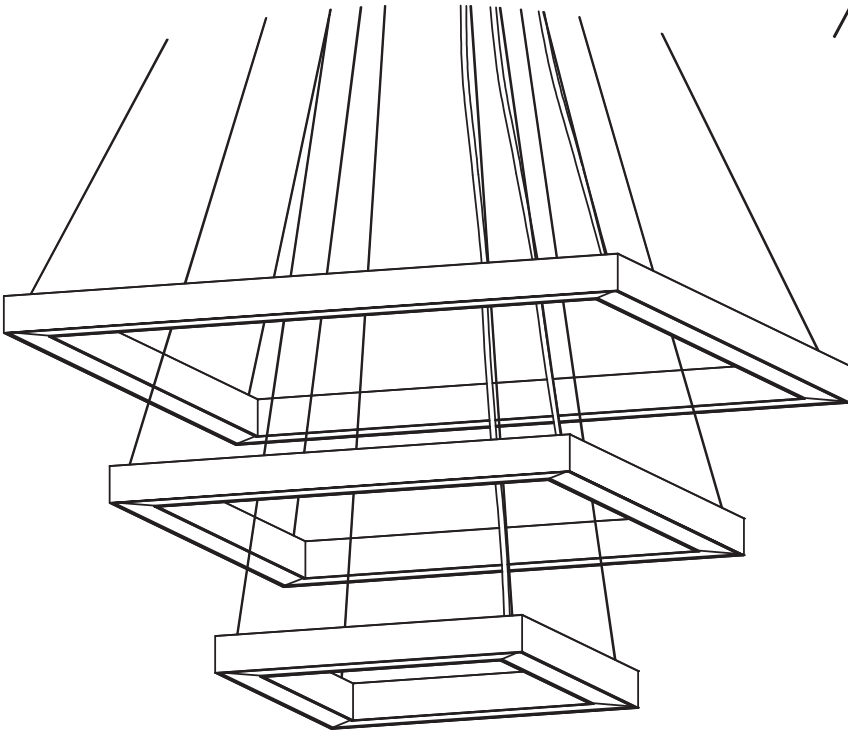

### Multiple fixture cluster


Please advise number of fixtures, size and suspension length for each fixture

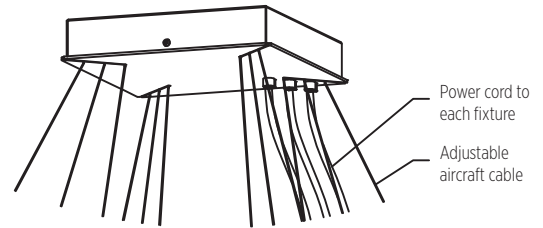

### Center canopy with integral driver 10.5" [267mm] Sq. x 1.9" [49mm] deep

Canopy mounts directly to the ceiling.  
Mounting hardware provided.

Optional mounting holes for 4" octagon box - provided. 4" octagon box - supplied and installed by others.

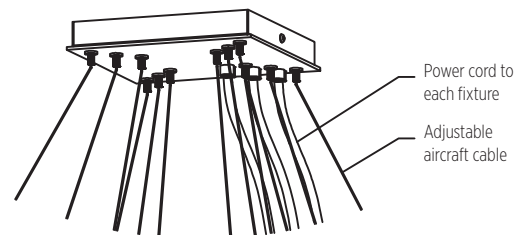

### Center canopy with remote driver 7.5" [190mm] Sq. x 1.1" [28mm] deep

Canopy mounts directly to the ceiling.  
Mounting hardware provided.

Optional mounting holes for 4" octagon box - provided. 4" octagon box - supplied and installed by others.

# Frame 70



PENDANT



## SPECIFICATION SHEET

Frame 70





### STRAIGHT CABLES MOUNTING OPTION - POWER

#### MOP-1A Standard - Supplied

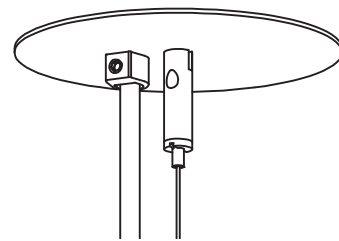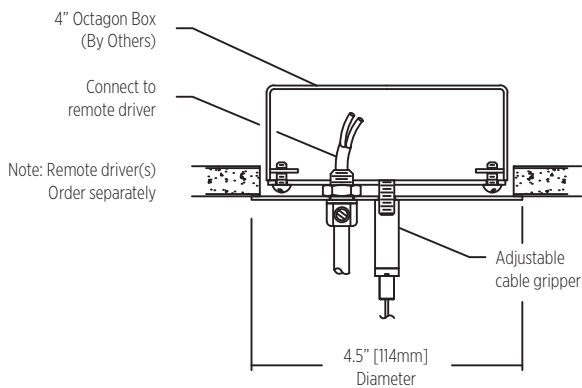



Mounting Option Power 1A  
Octagon Box (By Others)  
Installed in drywall, wood or concrete ceiling

#### MOP-2A-1 Order Separately

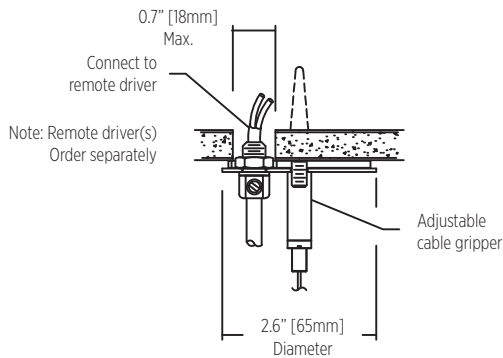

Mounting Option Power 2A-1  
Suspension assembly  
Installed in drywall or wood ceiling

#### MOP-2A-2 Order Separately

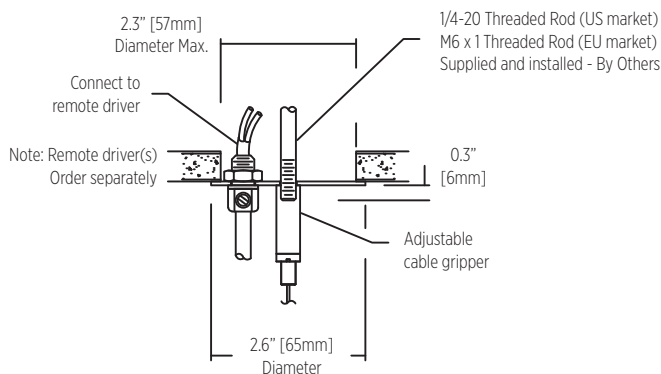

Mounting Option Power 2A-2  
Suspension assembly  
Installed in drywall or wood ceiling

# Frame 70

PENDANT





## SPECIFICATION SHEET

Frame 70





### MOP-3A Order Separately

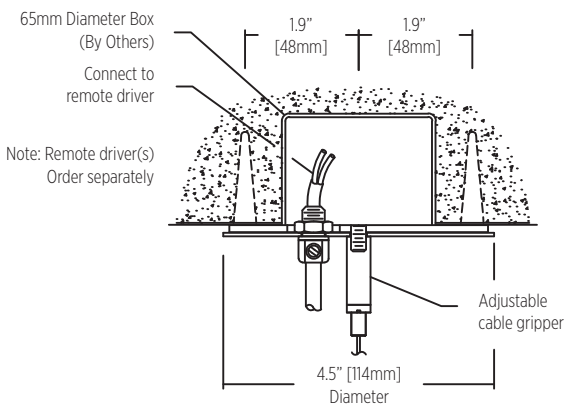

Mounting Option Power 3A  
65mm Diameter Box (By Others)  
Installed in drywall, wood or concrete ceiling



### STRAIGHT CABLES MOUNTING OPTION - NON POWER

#### MONP-1A-1 Standard - Supplied

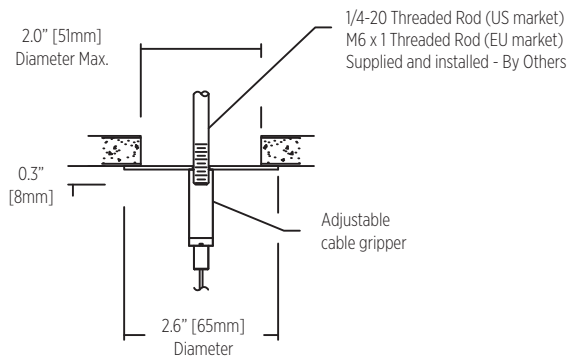

Mounting Option - Non Power  
Threaded Rod installed  
to structural ceiling (By Others)

#### MONP-1A-2 Alternative - Supplied

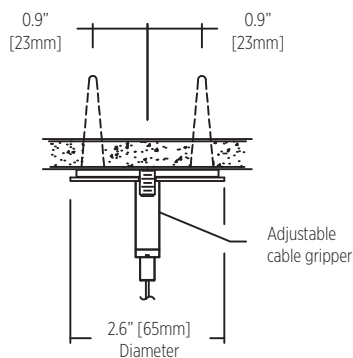

Mounting Option - Non Power  
Suspension Assembly  
Installed in drywall, wood or concrete ceiling