

# Linea 50



PENDANT

## SPECIFICATION SHEET

Linea 50



### Model 1672

**Type**  
P Pendant

**Size**

48	48.6" [1234mm]
60	60.4" [1535mm]
72	72.3" [1836mm]
84	84.1" [2137mm]
Custom	

### Wattage<sup>1,2</sup>

Direct	Indirect <sup>3</sup>
<b>48"</b>	
LD 12W (1600lm)	LI 12W (1600lm)
MD 24W (2970lm)	MI 24W (2970lm)
<b>60"</b>	
LD 15W (2000lm)	LI 15W (2000lm)
MD 30W (3715lm)	MI 30W (3715lm)
<b>72"</b>	
LD 18W (2400lm)	LI 18W (2400lm)
MD 36W (4460lm)	MI 36W (4460lm)
<b>84"</b>	
LD 21W (2800lm)	LI 21W (2800lm)
MD 42W (5200lm)	MI 42W (5200lm)
	XI - No Indirect

### Color Temp<sup>4</sup>

30	3000
35	3500
40	4000

### Voltage

2 220/240 Volt

### Driver

RD Remote

### Control - RD

S	Non-dim
D010	0-10V
DALI	DALI
SWD	SwitchDIM

### Diffuser Bottom

SW Satin opal acrylic

### Diffuser Top

SA Satin clear acrylic  
CT Aluminum - painted to match the fixture

### Finish<sup>5</sup>

16 Clear anodized aluminum  
21 Painted white - RAL 9010 matte  
26 Painted black - RAL 9005 matte  
22 Painted custom color

### Mounting

SC Straight cables  
PC Power cables

### Circuit

CS Circuit - Single  
CD Circuit - Dual

### Power Cable<sup>6</sup>


CC Clear insulated cable

### Notes

- Nominal lumens value specified
- Linear LED board, constant voltage 24 Volt
- For no Indirect light specify XI
- 90+ CRI standard
- Canopy finish matches housing  
For Clear anodized aluminum finish, canopy finish will be painted anodized aluminum
- 96" standard power cable length

### Example fixture number:

1672 - P - 48 - LD - LI - 30 - 2 - RD - S - SW - SA - 16 - SC - CS - CC

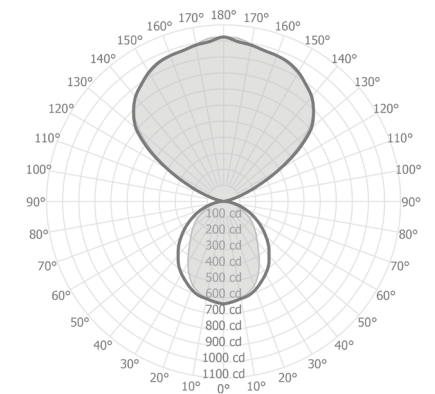



# Linea 50

## PENDANT

Linea 50 is available in pendant and surface options. The clean essential line of the fixture makes it suitable for use in any modern environment. Streamlined and minimal, the Linea 50 is an elegant and refined option for direct and indirect illumination in offices or reception desks.



Size	
48	48.6" [1234mm]
60	60.4" [1535mm]
72	72.3" [1836mm]
84	84.1" [2137mm]
Custom	



- \* 50mm x 50mm fixture body profile
- \* Straight power cables mounting option
- \* Continuous fixture with hairline fixture segments connection

# Linea 50

PENDANT






## SPECIFICATION SHEET

Linea 50



### INSTALLATION TYPE

Straight cables with remote driver

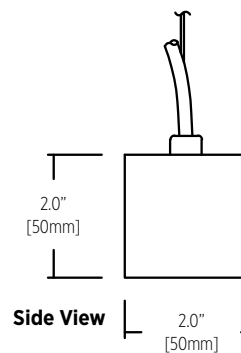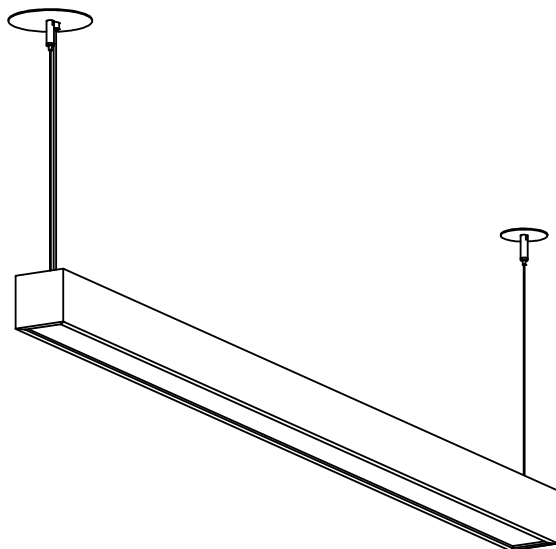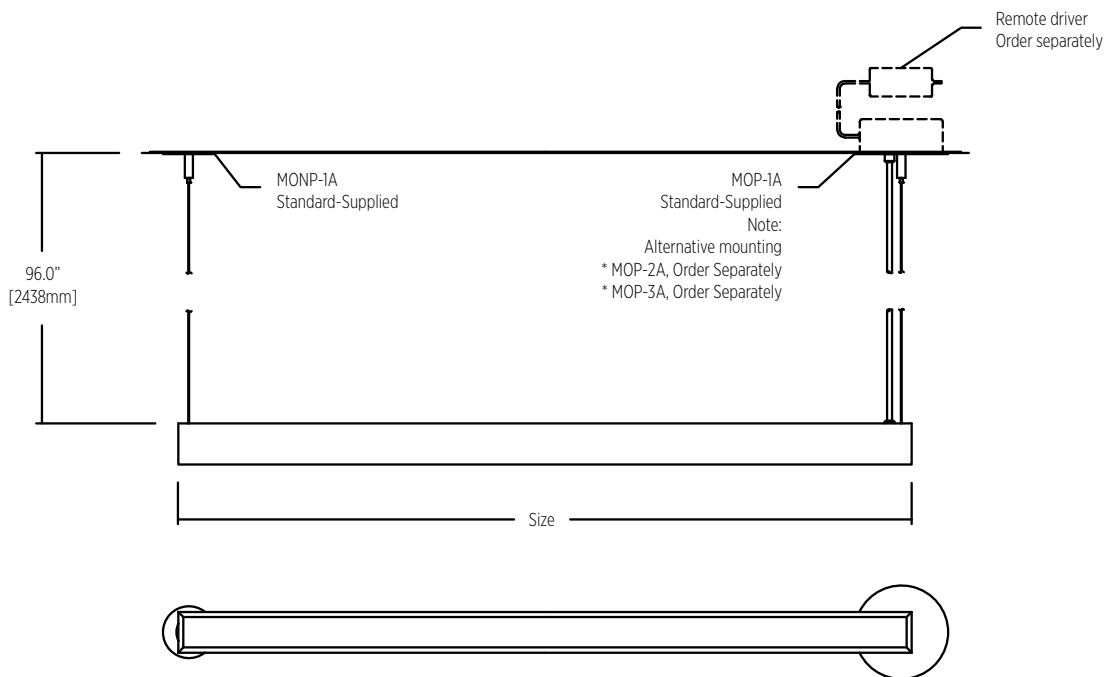

# Linea 50

PENDANT




## SPECIFICATION SHEET

Linea 50





### INSTALLATION TYPE

Straight power cables with remote driver

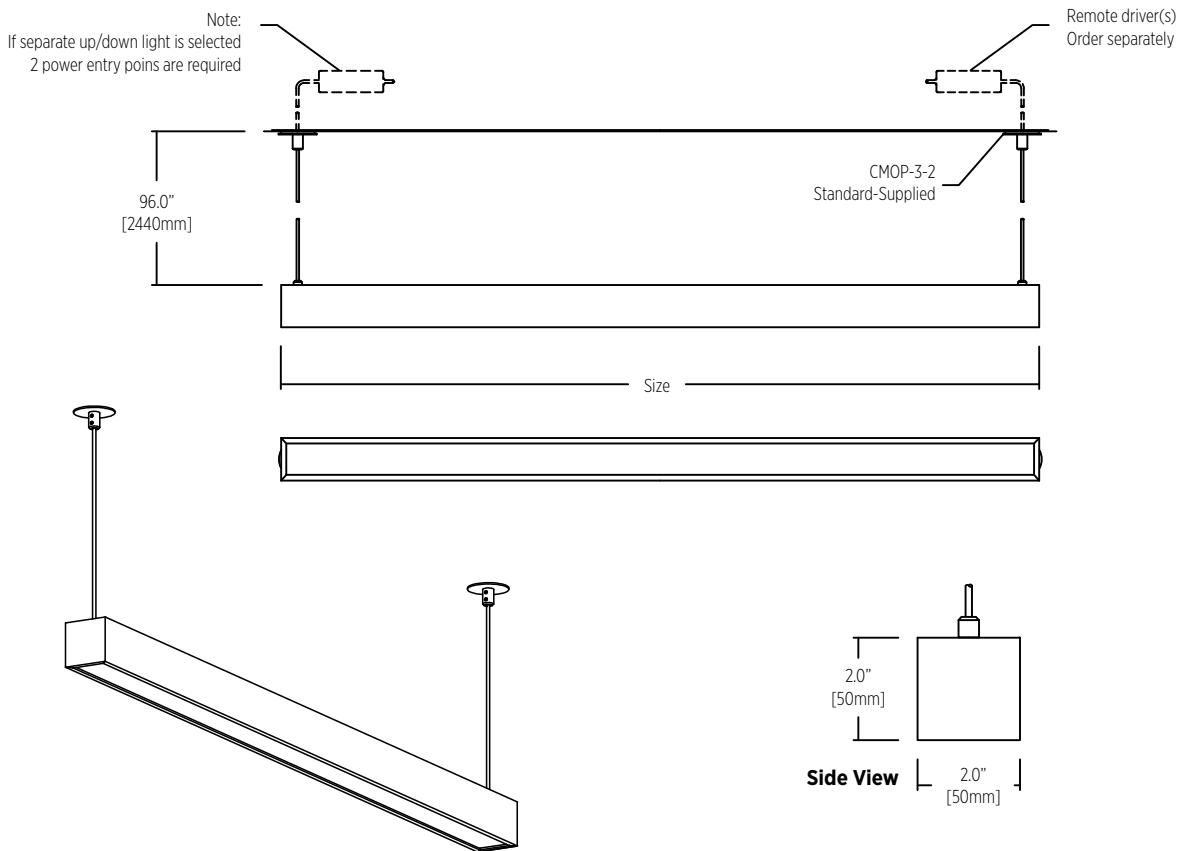

### CMOP-3-2 Standard - Supplied

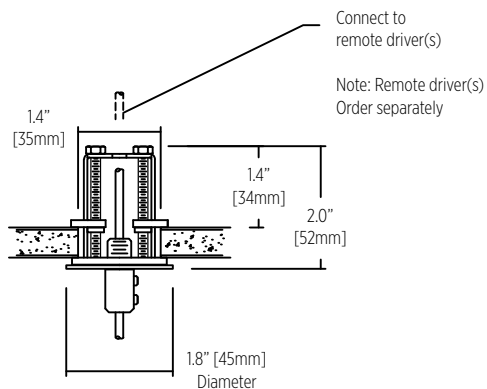

Mounting Option Power 3-2  
Suspension Assembly  
Installed in drywall or wood ceiling

# Linea 50

PENDANT





## SPECIFICATION SHEET

Linea 50





### STRAIGHT CABLES MOUNTING OPTION - POWER

#### MOP-1A Standard - Supplied

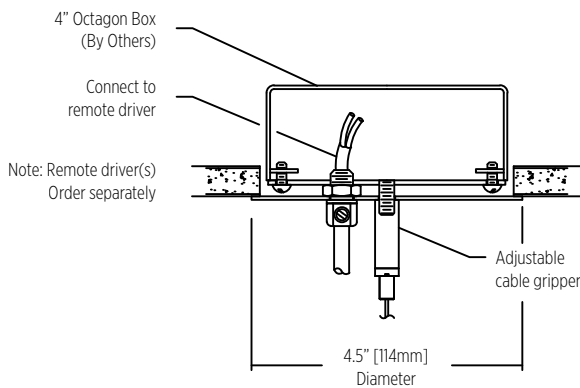



Mounting Option Power 1A  
Octagon Box (By Others)  
Installed in drywall, wood or concrete ceiling

#### MOP-2A-1 Order Separately

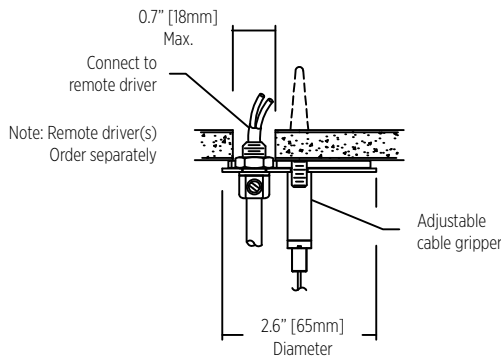

Mounting Option Power 2A-1  
Suspension assembly  
Installed in drywall or wood ceiling

#### MOP-2A-2 Order Separately

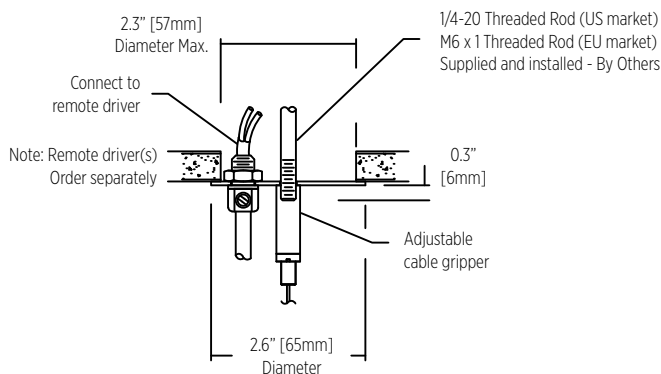

Mounting Option Power 2A-2  
Suspension assembly  
Installed in drywall or wood ceiling

# Linea 50

PENDANT





## SPECIFICATION SHEET

Linea 50





### MOP-3A Order Separately

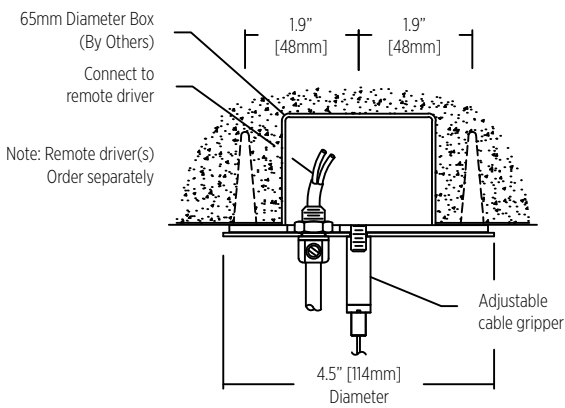

Mounting Option Power 3A  
65mm Diameter Box (By Others)  
Installed in drywall, wood or concrete ceiling



### STRAIGHT CABLES MOUNTING OPTION - NON POWER

#### MONP-1A-1 Standard - Supplied

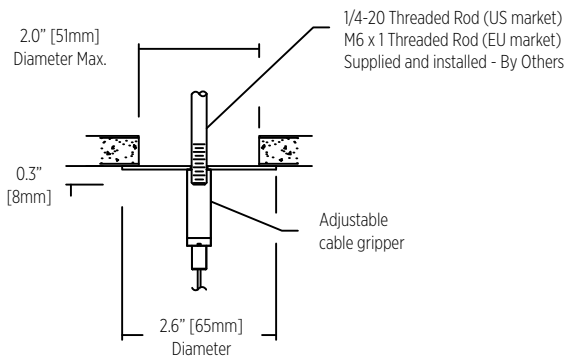

Mounting Option - Non Power  
Threaded Rod installed  
to structural ceiling (By Others)

#### MONP-1A-2 Alternative - Supplied

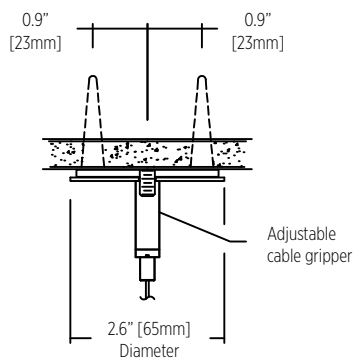

Mounting Option - Non Power  
Suspension Assembly  
Installed in drywall, wood or concrete ceiling