

Linea 50

SURFACE



SPECIFICATION SHEET

Linea 50



Model 1672

Type

S Surface

Size

48 48.6" [1234mm]
60 60.4" [1535mm]
72 72.3" [1836mm]
84 84.1" [2137mm]

Custom

Wattage^{1,2}

48"

L 12W (1600lm)
M 24W (2970lm)

60"

L 15W (2000lm)
M 30W (3715lm)

72"

L 18W (2400lm)
M 36W (4460lm)

84"

L 21W (2800lm)
M 42W (5200lm)

Color Temp³

30 3000
35 3500
40 4000

Voltage

2 220/240 Volt

Driver

RD Remote

Control - RD

S Non-dim
D010 0-10V
DALI DALI
SWD SwitchDIM

Diffuser Bottom

SW Satin opal acrylic

Finish


16 Clear anodized aluminum
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Notes

- 1 Nominal lumens value specified
- 2 Linear LED board, constant voltage 24 Volt
- 3 90+ CRI standard

Example fixture number:

1672 - S - 48 - L - 30 - 2 - RD - S - SW - 16

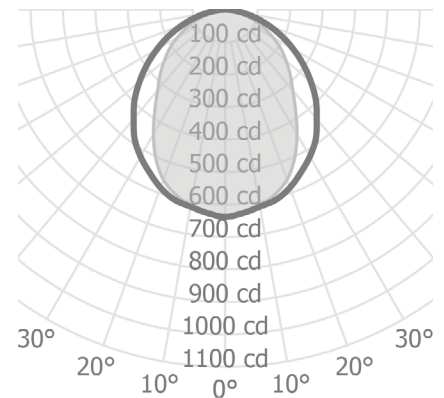

Linea 50

SURFACE

The simple design features give the product an elegant and unique appearance. Linear surface mounted fixture with Direct / Indirect light distribution. Extruded aluminum construction with Satin Opal diffuser.



Size	
48	48.6" [1234mm]
60	60.4" [1535mm]
72	72.3" [1836mm]
84	84.1" [2137mm]
Custom	



* 50mm x 50mm fixture body profile
* Fixture is ADA compliant

Linea 50

SURFACE





SPECIFICATION SHEET

Linea 50



Remote driver(s)
Order separately

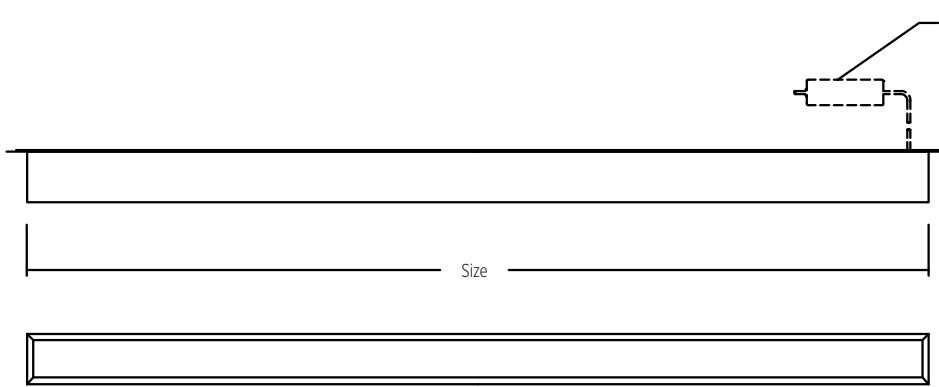

Side View