

Sigma Outdoor



WALL

SPECIFICATION SHEET

Sigma Outdoor



Model 1740WL ¹

Type

W Wall

Size

27	27.0" [686mm]
39	39.0" [991mm]
51	51.0" [1295mm]
Custom	

Wattage ^{2,3}

27"	L 9W (920lm)
39"	L 13W (1375lm)
51"	L 18W (1835lm)

Color Temp ⁴

30	3000
35	3500
40	4000

Voltage

2 220/240 Volt

Driver

RD Remote

Control - RD

S	Non-dim
D010	0-10V
DALI	DALI
SWD	SwitchDIM

Diffuser

SA Satin clear acrylic

Finish


19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Notes

- 1 Suitable for wet location, IP65 rated LED tape
- 2 Nominal lumens value specified
- 3 LED tape, constant voltage 24 Volt
- 4 90+ CRI standard

Example fixture number:

1740WL - W - 39 - L - 30 - 2 - RD - S - SA - 19

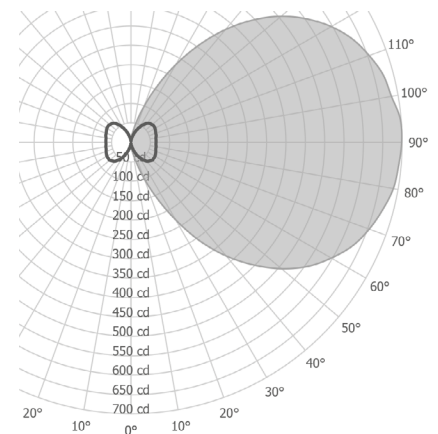

Sigma Outdoor

WALL

Luminaire with formed aluminum housing and machined end caps. The diffuser is Satin Clear Acrylic. The fixture can be arranged vertically or horizontally.

Durable, suitable for wet or dry locations.




Size	
27	27" [686mm]
39	39" [991mm]
51	51" [1,295mm]
Custom	



* 50mm diameter diffuser cylinder
* Fixture is ADA compliant

Sigma Outdoor

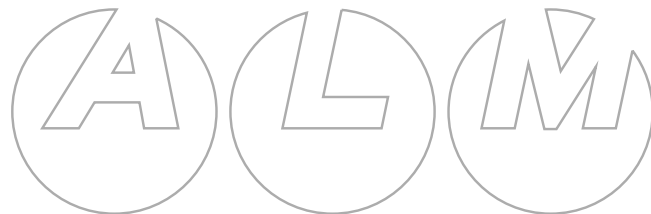

WALL

SPECIFICATION SHEET

Sigma Outdoor

