

Step RC

SURFACE



SPECIFICATION SHEET

Step RC



Model 1541

Type

S Surface

Size

24	24.0" [610mm]
28	28.0" [711mm]
32	32.0" [813mm]
36	36.0" [914mm]
48	48.0" [1219mm]
Custom	

Wattage^{1,2}

24"

L 14W (1865lm)
M 28W (3465lm)

28"

L 17W (2265lm)
M 34W (4210lm)

32"

L 20W (2665lm)
M 40W (4955lm)

36"

L 23W (3065lm)
M 46W (5695lm)

48"

L 32W (4265lm)
M 64W (7925lm)

Color Temp³

30	3000
35	3500
40	4000

Voltage

2 220/240 Volt

Driver

RD Remote
ID Integral

Control - RD

S Non-dim
D010 0-10V
DALI DALI
SWD SwitchDIM
X If integral driver is selected

Control - ID

S Non-dim
D010 0-10V
DALI DALI
SWD SwitchDIM
X If remote driver is selected

Diffuser Bottom

SW Satin opal acrylic

Diffuser Top

CPS Clear polycarbonate -
sanded both sides

Finish


16 Clear anodized aluminum
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Notes

- 1 Nominal lumens value specified
- 2 Linear LED board, constant voltage 24 Volt
- 3 90+ CRI standard

Example fixture number:

1541 - S - 24 - L - 30 - 2 - ID - X - S - SW -
CPS - 16

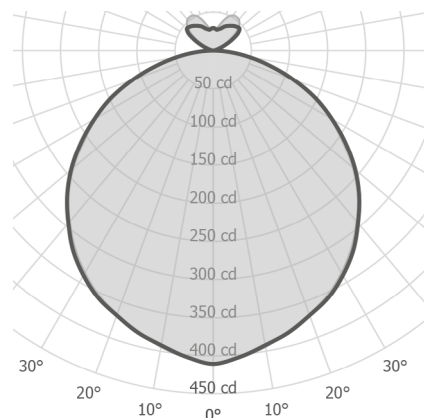

Step RC

SURFACE

The clean lines of the Step RC make it suitable for use in any modern environment. Step RC is available in pendant and surface versions with evenly illuminated Satin Opal lens, and 10% uplight.

Clear anodized extruded aluminum construction.



Size	
24	24" [610mm]
28	28" [711mm]
32	32" [813mm]
36	36" [914mm]
48	48" [1,219mm]
Custom	



* 70mm bottom diffuser profile

Step RC

SURFACE



SPECIFICATION SHEET

Step RC

