

Step

SURFACE



SPECIFICATION SHEET

Step



Model 1540

Type

S Surface

Size

24 24.0" [610mm]
28 28.0" [711mm]
32 32.0" [813mm]
36 36.0" [914mm]

Custom

Wattage^{1,2}

24"
L 28W (3735lm)
28"
L 40W (5335lm)
32"
L 60W (8000lm)
36"
L 77W (10265lm)

Color Temp³

30 3000
35 3500
40 4000

Voltage

2 220/240 Volt

Driver

RD Remote
ID Integral

Control - RD

S Non-dim
D010 0-10V
DALI DALI
SWD SwitchDIM
X If integral driver is selected

Control - ID

S Non-dim
D010 0-10V
DALI DALI
SWD SwitchDIM
X If remote driver is selected

Diffuser Bottom

SW Satin opal acrylic

Diffuser Top

CPS Clear polycarbonate -
sanded both sides

Finish


16 Clear anodized aluminum
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Notes

1 Nominal lumens value specified
2 Linear LED board, constant voltage
24 Volt
3 90+ CRI standard

Example fixture number:

1540 - S - 24 - L - 30 - 2 - ID - X - S - SW -
CPS - 16

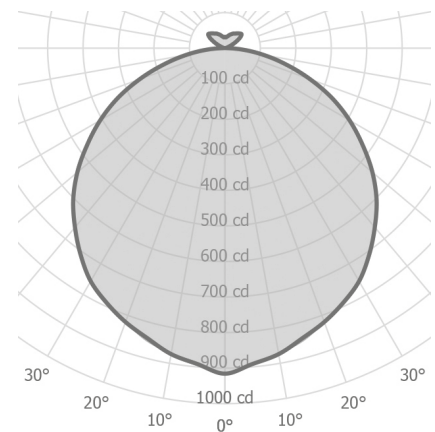



Step

SURFACE

The indirect lighting of 10% creates a glow on the ceiling around the fixture. Direct lighting creates even illumination of the Satin Opal diffuser. Step is used in various applications establishing itself as a stylish decorative product and technical architectural instrument.



Size	
24	24" [610mm]
28	28" [711mm]
32	32" [813mm]
36	36" [914mm]
Custom	



* 70mm bottom diffuser profile


Step

SURFACE



SPECIFICATION SHEET

Step

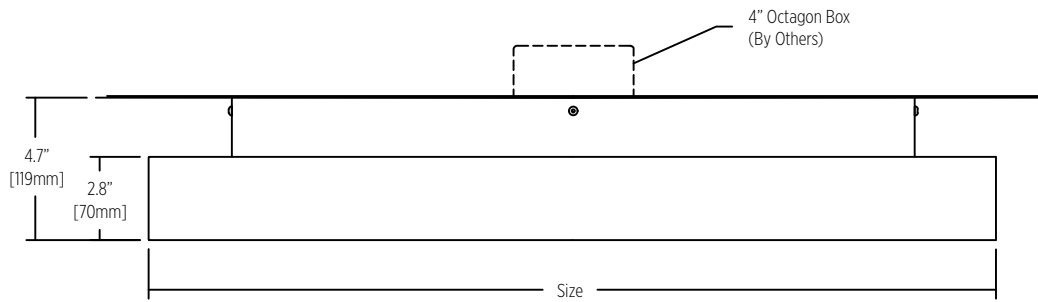

Note:

* There are additional holes in the mounting box (panel) for secure installation (mounting hardware provided)
See Installation Instructions for details

