

Stick AT

PENDANT



SPECIFICATION SHEET

Stick AT



Model 1591

AT Acrylic top

Type

P Pendant

Size

18 18.0" [457mm]
22 22.0" [559mm]
Custom

Wattage ^{1,2}

M 8.4W (1310lm)
H 12.6W (1710lm)

Color Temp ³

30 3000
35 3500
40 4000

Voltage

2 220/240 Volt

Driver

RD Remote

Control - RD

S Non-dim
D010 0-10V
DALI DALI
PCD Phase-cut (TRIAC)

Diffuser

SA Satin clear acrylic

Finish ⁴

21 Painted white - RAL 9010 matte
22 Painted custom color

Mounting

PC Power cable

Power Cable ⁵


CC Clear insulated cable

Notes

- 1 Nominal lumens value specified
- 2 Downlight LED module, constant current 18 Volt 500 mA - 8.4 W, 700 mA - 12.6 W
- 3 90+ CRI standard
- 4 AT fixture and canopy are painted white standard, other colors optional on canopy
- 5 96" standard power cable length

Example fixture number:

1591 - P - 22 - M - 30 - 2 - RD - S - SA - 21 - PC - CC

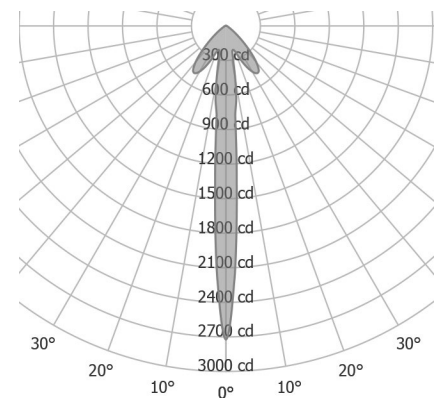



Stick AT

PENDANT

Stick AT appears like a flying candle. When used individually, in groupings with a custom canopy or attached to Arc fixture, Stick AT provides functional illumination in the space. Satin Clear Acrylic visible elements.



Size

18 18" [458mm]

22 22" [560mm]

Custom



* 70mm diameter diffuser cylinder
* Available in 18" [458mm] and 22" [560mm] long body

Stick AT

PENDANT





SPECIFICATION SHEET

Stick AT





INSTALLATION TYPE

Straight power cable with remote driver

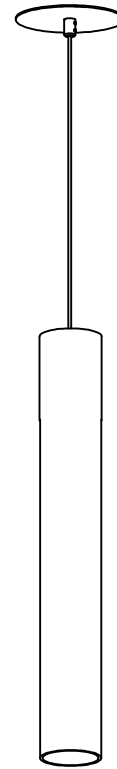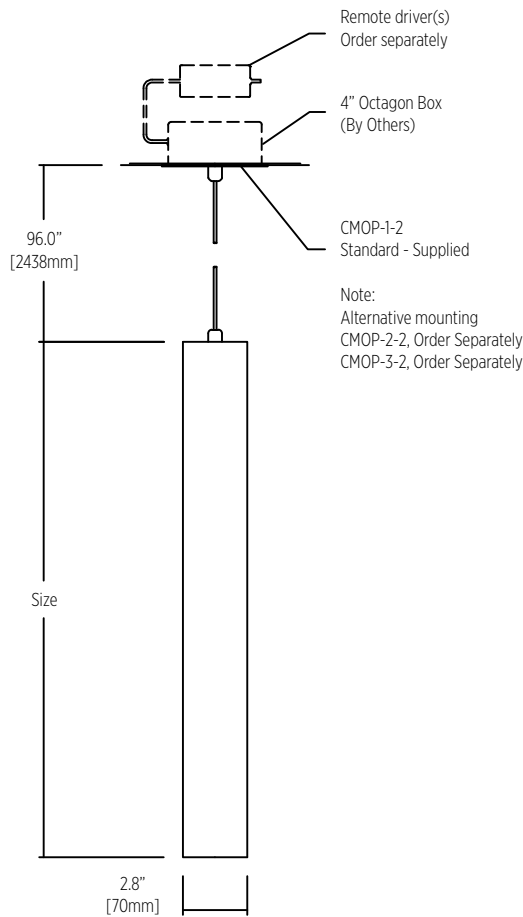

MOP-1-2 Standard - Supplied

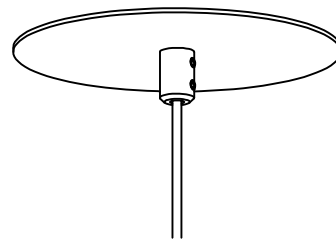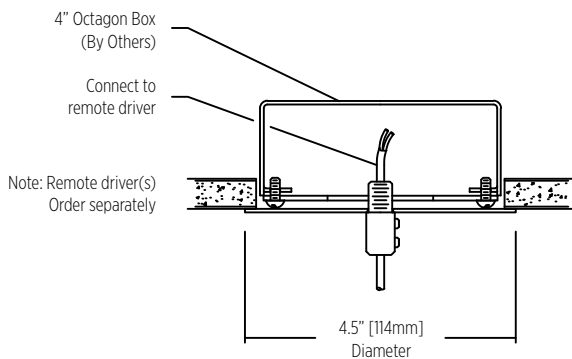

Mounting Option Power 1-2
Octagon Box (By Others)
Installed in drywall, wood or concrete ceiling

Stick AT

PENDANT





SPECIFICATION SHEET

Stick AT





ALTERNATIVE MOUNTING OPTION

CMOP-2-2 Order Separately

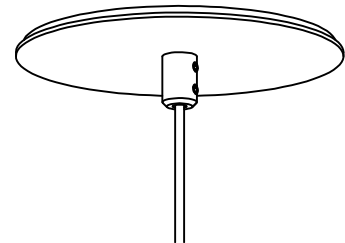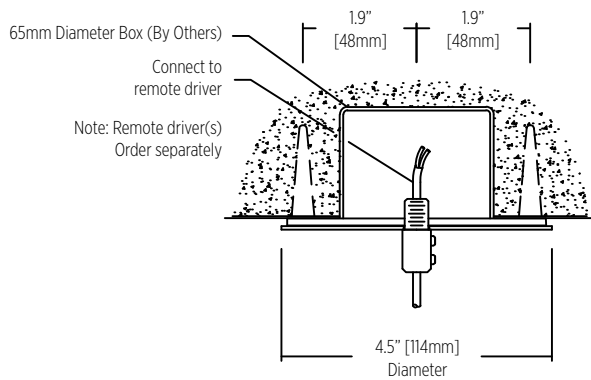

Mounting Option Power 2-2
65mm Diameter Box (By Others)
Installed in drywall, wood or concrete ceiling

CMOP-3-2 Order Separately

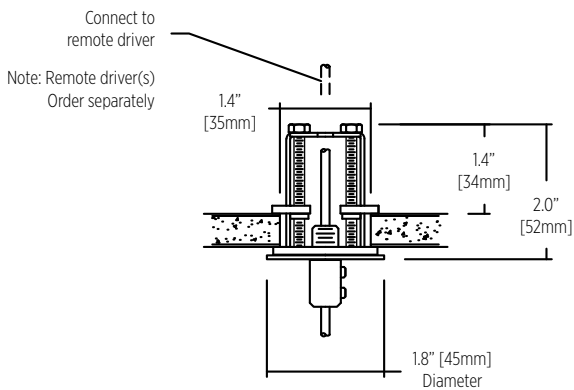

Mounting Option Power 3-2
Suspension Assembly
Installed in drywall or wood ceiling