PENDANT



SPECIFICATION SHEET

Stick M

Model 1593

Type P	Pendant
Size	
12	12.0" [305mm]
Custom	

Wattage 1, 2

M 8.4W (1310lm) H 12.6W (1710lm)

Color Temp ³ 30 35 3500 4000

Voltage

2 220/240 Volt

Driver

40

Remote RDID Integral

Control - RD

S	Non-dim
D010	0-10V
DALI	DALI

PCD Phase-cut (TRIAC) If integral driver is selected Χ

Control - ID

S Non-dim D010 0-10V

Χ If remote driver is selected

Diffuser SA

Finish ⁴	
19	Painted anodized aluminum -
	RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Satin clear acrylic

Mounting

PC Power cable


Power Cable 5


CC	Clear insulated cable (standard)
WC	White cable
BC	Black cable

Notes

I	Nominal lumens value specified
2	Downlight LED module,
	constant current 18 Volt
	500 mA - 8.4 W, 700 mA - 12.6 W
3	90+ CRI standard
4	Canopy finish matches housing
5	96" standard power cable length

Example fixture number:





PENDANT

The Stick M is used individually, in groupings with a custom canopy or attached to Arc fixture. Stick M provides functional illumination in the space. The fixture is designed for coordinated use in different environments establishing itself as a stylish decorative product and a technical architectural instrument.





12 12" [305mm] Custom





PENDANT




SPECIFICATION SHEET

Stick M





INSTALLATION TYPE

Straight power cable with integral driver

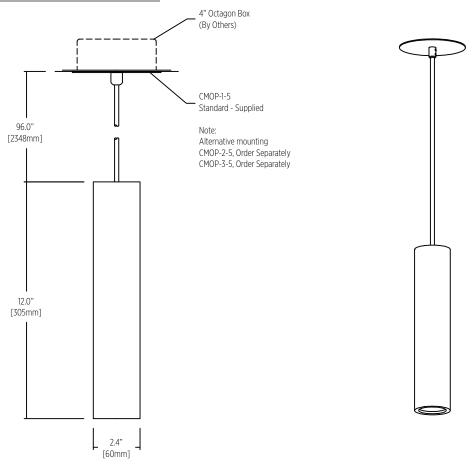

CMOP-1-5 Standard - Supplied





Mounting Option Power 1-5 Octagon Box (By Others) Installed in drywall, wood or concrete ceiling

PENDANT




SPECIFICATION SHEET


Stick M



ALTERNATIVE MOUNTING OPTION


CMOP-2-5 Order Separately






Mounting Option Power 2-5 65mm Diameter Box (By Others) Installed in drywall, wood or concrete ceiling

CMOP-3-5 Order Separately





Mounting Option Power 3-5 Suspension Assembly Installed in drywall or wood ceiling

www.almlighting.com 2