

Stick MT

PENDANT



SPECIFICATION SHEET

Stick MT



Model 1592

MT Metal top

Type

P Pendant

Size

18 18.0" [457mm]
22 22.0" [559mm]
26 26.0" [660mm]

Custom

Wattage^{1,2}

M 8.4W (1310lm)
H 12.6W (1710lm)

Color Temp³

30 3000
35 3500
40 4000

Voltage

2 220/240 Volt

Driver

RD Remote

Control - RD

S Non-dim
D010 0-10V
DALI DALI
PCD Phase-cut (TRIAC)

Diffuser

SA Satin clear acrylic

Finish⁴

19 Painted anodized aluminum - RAL 9006 matte
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Mounting

PC Power cable

Power Cable⁵


CC Clear insulated cable

Notes

- 1 Nominal lumens value specified
- 2 Downlight LED module, constant current 18 Volt 500 mA - 8.4 W, 700 mA - 12.6 W
- 3 90+ CRI standard
- 4 Canopy finish matches housing
- 5 96" standard power cable length

Example fixture number:

1592 - P - 22 - M - 30 - 2 - RD - S - SA - 21 - PC - CC

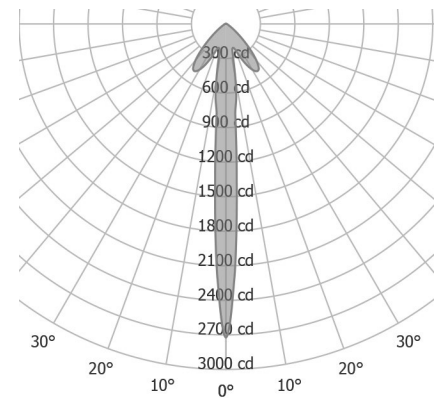

Stick MT

PENDANT

Suspended luminaire with metal housing. Satin clear diffuser in combination with different RAL finishes offers uniform contemporary design and a distinctive look.



Size	
18	18" [458mm]
22	22" [560mm]
26	26" [660mm]
Custom	



* 70mm and 80mm diameter diffuser cylinder
* Available in 18" [458mm], 22" [560mm] and 26" [660mm] long body

Stick MT

PENDANT





SPECIFICATION SHEET

Stick MT





INSTALLATION TYPE

Straight power cable with remote driver

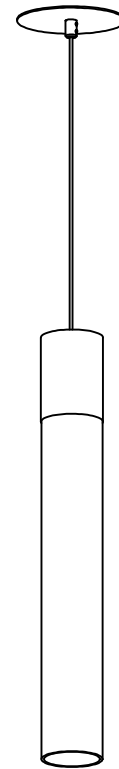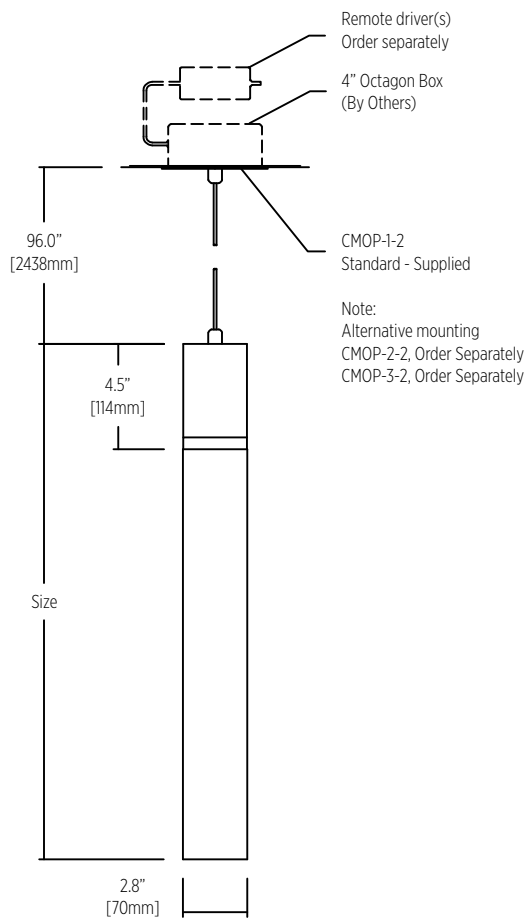

CMOP-1-2 Standard - Supplied

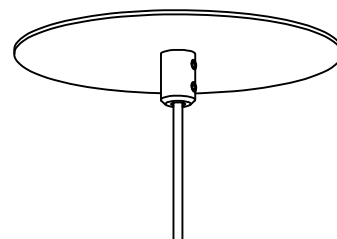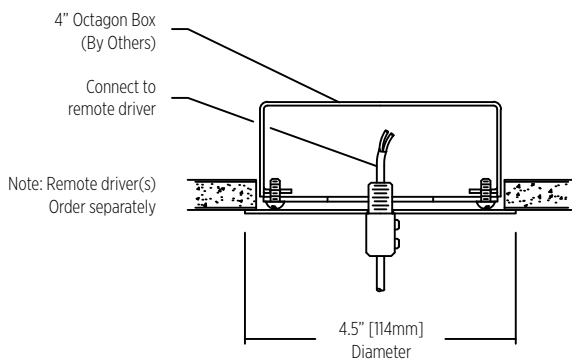

Mounting Option Power 1-2
Octagon Box (By Others)
Installed in drywall, wood or concrete ceiling

Stick MT

PENDANT





SPECIFICATION SHEET

Stick MT





ALTERNATIVE MOUNTING OPTION

CMOP-2-2 Order Separately

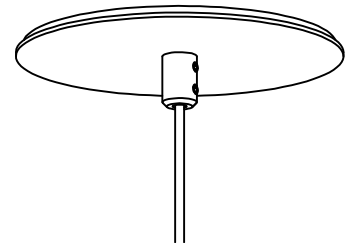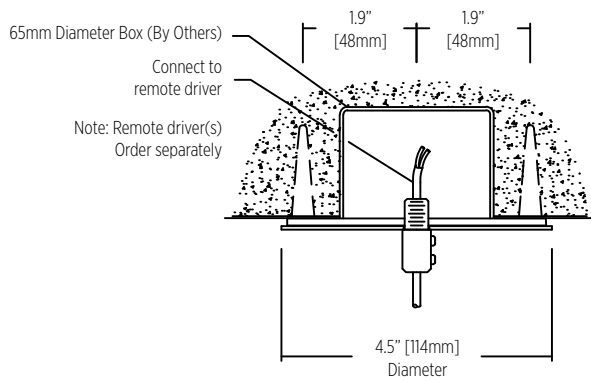

Mounting Option Power 2-2
65mm Diameter Box (By Others)
Installed in drywall, wood or concrete ceiling

CMOP-3-2 Order Separately

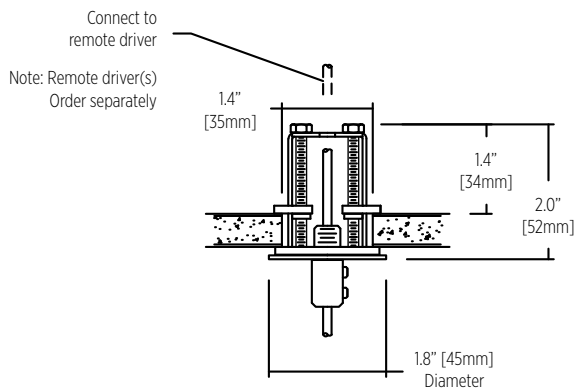

Mounting Option Power 3-2
Suspension Assembly
Installed in drywall or wood ceiling