

# Wing AR

PENDANT



## SPECIFICATION SHEET

### Wing AR



#### Model 1821

#### Type

P Pendant

#### Size

26 26.0" [660mm]  
37 37.0" [940mm]  
49 49.0" [1245mm]  
Custom

#### Wattage<sup>1,2</sup>

**26"**  
L 6W (800lm)  
M 12W (1485lm)  
**37"**  
L 9W (1200lm)  
M 18W (2230lm)  
**49"**  
L 12W (1600lm)  
M 24W (2970lm)

#### Color Temp<sup>3</sup>

30 3000  
35 3500  
40 4000

#### Voltage

2 220/240 Volt

#### Driver

RD Remote  
ID Integral

#### Control - RD

S Non-dim  
D010 0-10V  
DALI DALI  
SWD SwitchDIM  
X If integral driver is selected

#### Control - ID

S Non-dim  
X If remote driver is selected

#### Diffuser<sup>4</sup>

SW Satin opal acrylic

#### Finish<sup>5</sup>

19 Painted anodized aluminum -  
RAL 9006 matte  
21 Painted white - RAL 9010 matte  
26 Painted black - RAL 9005 matte  
22 Painted custom color

#### Mounting

SC Straight cables

#### Power Cable<sup>6</sup>


CC Clear insulated cable (standard)  
WC White cable  
BC Black cable

#### Notes

- 1 Nominal lumens value specified
- 2 Linear LED board, constant voltage 24 Volt
- 3 90+ CRI standard
- 4 Reflector is opal acrylic
- 5 Canopy finish matches housing
- 6 96" standard cable length

#### Example fixture number:

1821 - P - 49 - L - 30 - 2 - RD - S - X - SW - 19  
- SC - CC

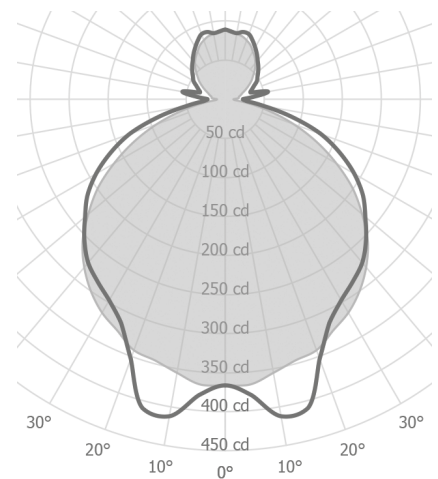



# Wing AR


## PENDANT

Wing AR, pendant, or surface mounted fixture provides glare-free Direct / Indirect illumination from a simple architectural shape.

A symmetrical, translucent reflector directs light down as well as allows light to softly illuminate the ceiling above.



Size
26 26" [660mm]
37 37" [940mm]
49 49" [1245mm]
Custom

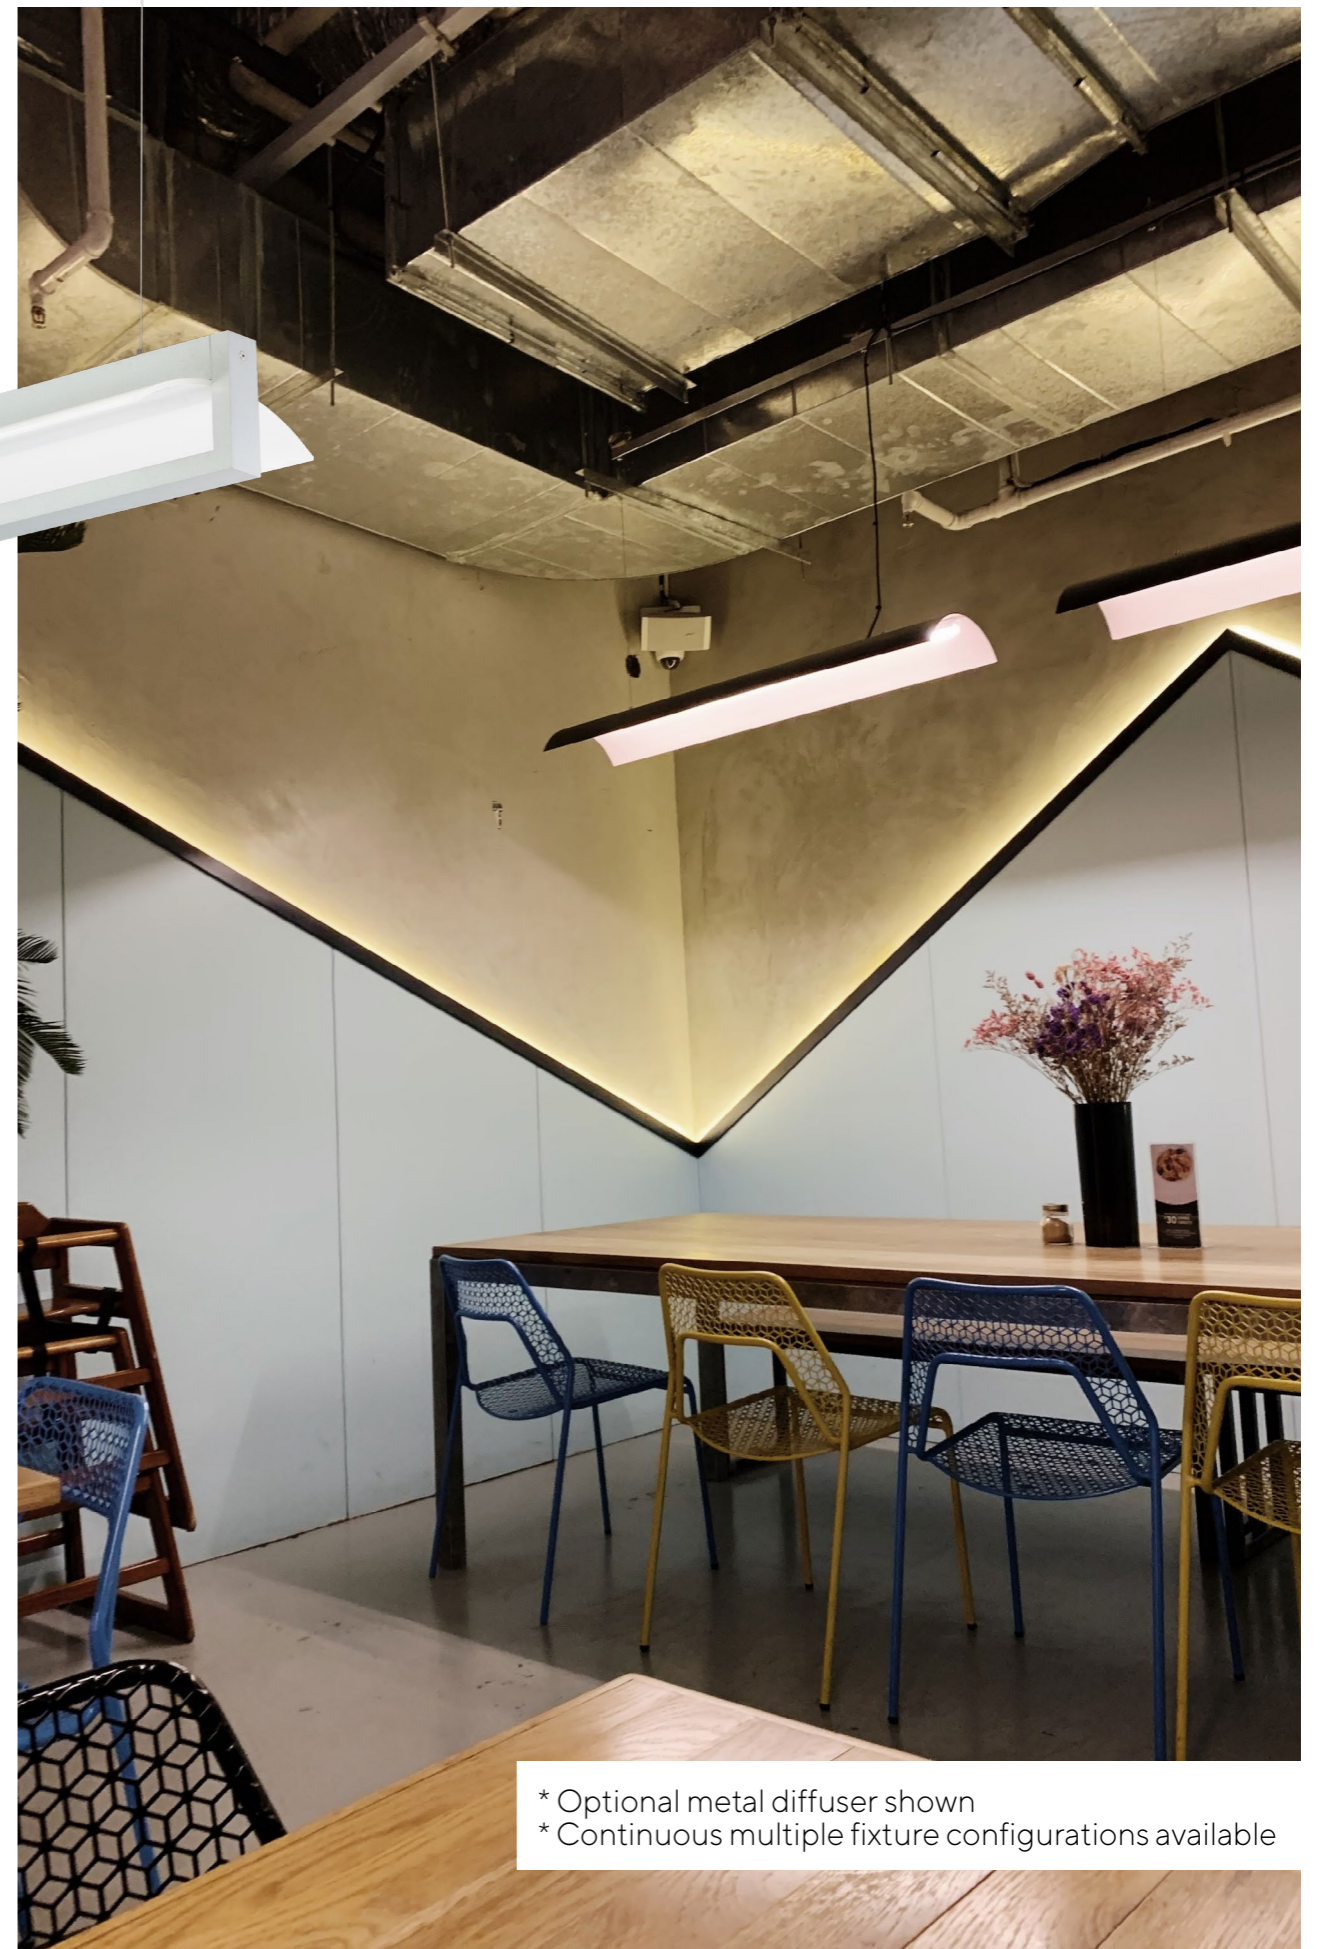

\* Optional metal diffuser shown  
\* Continuous multiple fixture configurations available

# Wing AR

PENDANT






## SPECIFICATION SHEET

Wing AR



### INSTALLATION TYPE

#### Straight cables with remote driver

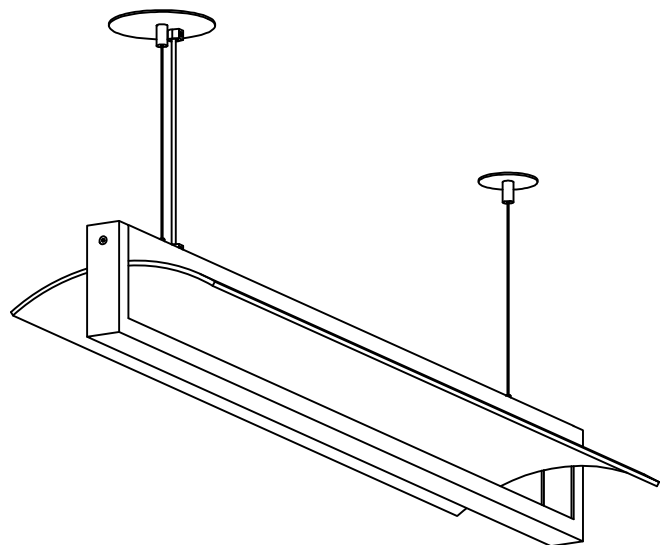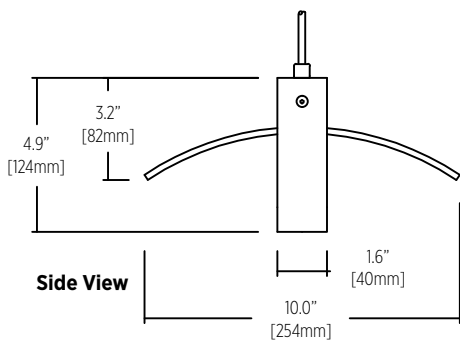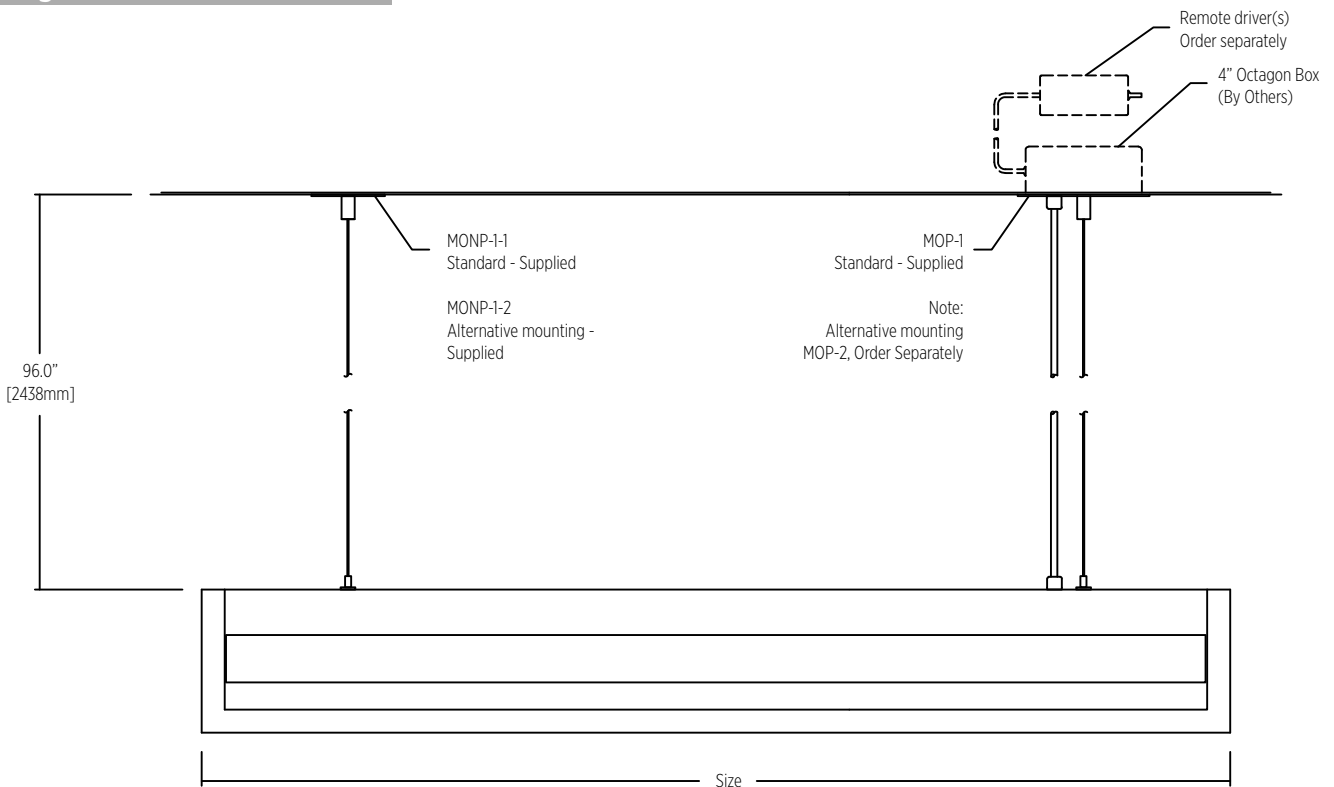

# Wing AR

PENDANT





## SPECIFICATION SHEET

Wing AR





### STRAIGHT CABLES MOUNTING OPTION - POWER

#### MOP-1 Standard - Supplied

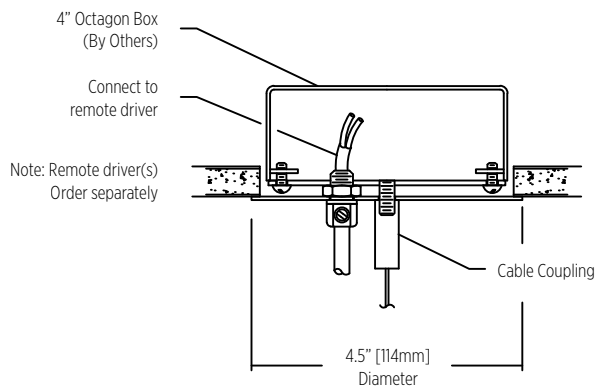



Mounting Option Power 1  
Octagon Box (By Others)  
Installed in drywall, wood or concrete ceiling

#### MOP-2-1 Order Separately

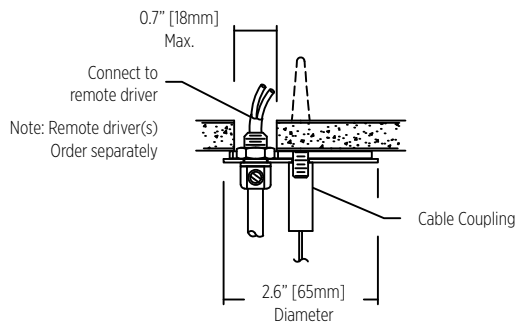

Mounting Option Power 2-1  
Suspension assembly  
Installed in drywall or wood ceiling

#### MOP-2-2 Order Separately

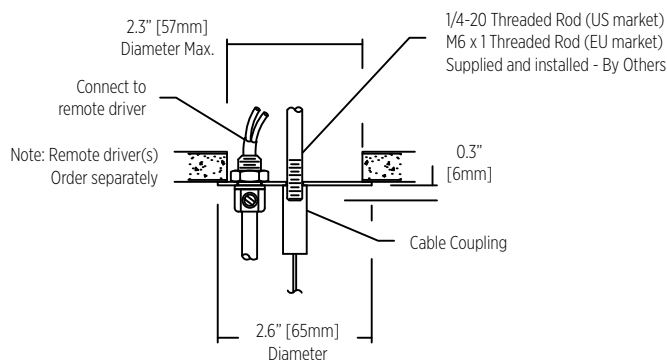

Mounting Option Power 2-2  
Suspension assembly  
Installed in drywall or wood ceiling

# Wing AR

PENDANT





## SPECIFICATION SHEET

Wing AR





### MOP-3 Order Separately

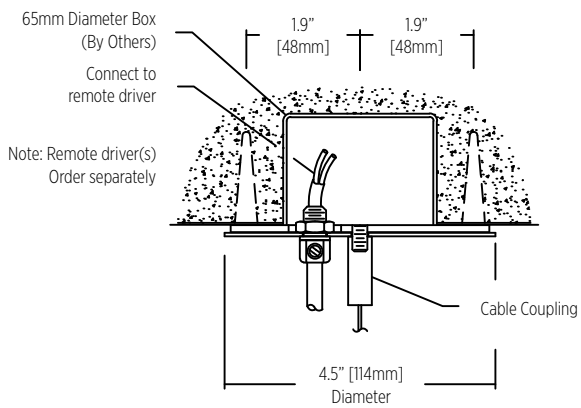



Mounting Option Power 3  
65mm Diameter Box (By Others)  
Installed in drywall, wood or concrete ceiling

### MONP-1-1 Standard - Supplied

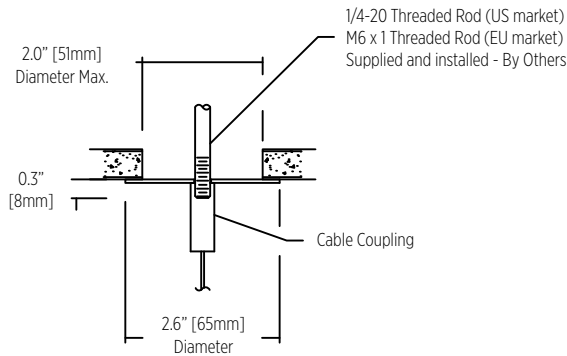

Mounting Option - Non Power  
Threaded Rod installed  
to structural ceiling (By Others)

### MONP-1-2 Alternative - Supplied

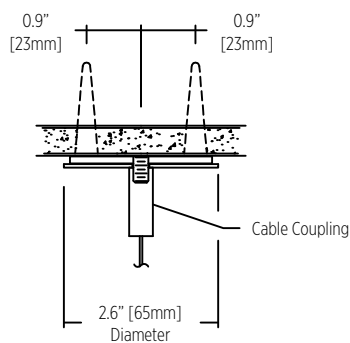


Mounting Option - Non Power  
Suspension Assembly  
Installed in drywall, wood or concrete ceiling

# Wing AR

PENDANT

## SPECIFICATION SHEET

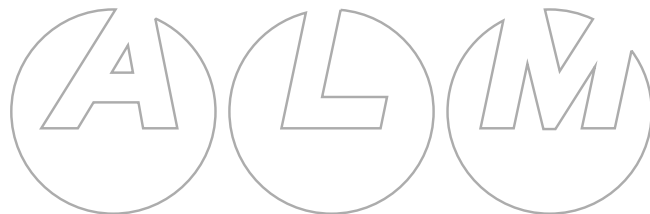

Wing AR

