

Wing AR

SURFACE



SPECIFICATION SHEET

Wing AR



Model 1821

Type

S Surface

Size

26 26.0" [660mm]
37 37.0" [940mm]
49 49.0" [1245mm]
Custom

Wattage ^{1,2}

26"
L 6W (800lm)
M 12W (1485lm)
37"
L 9W (1200lm)
M 18W (2230lm)
49"
L 12W (1600lm)
M 24W (2970lm)

Color Temp ³

30 3000
35 3500
40 4000

Voltage

2 220/240 Volt

Driver

RD Remote
ID Integral

Control - RD

S Non-dim
D010 0-10V
DALI DALI
SWD SwitchDIM
X If integral driver is selected

Control - ID

S Non-dim
X If remote driver is selected

Diffuser ⁴

SW Satin opal acrylic

Finish



19 Painted anodized aluminum -
RAL 9006 matte
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Notes

1 Nominal lumens value specified
2 Linear LED board, constant voltage
24 Volt
3 90+ CRI standard
4 Reflector is opal acrylic

Example fixture number:

1821 - S - 49 - L - 30 - 2 - RD - S - X - SW - 19

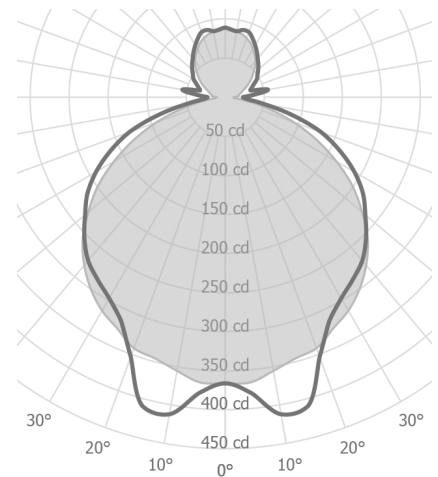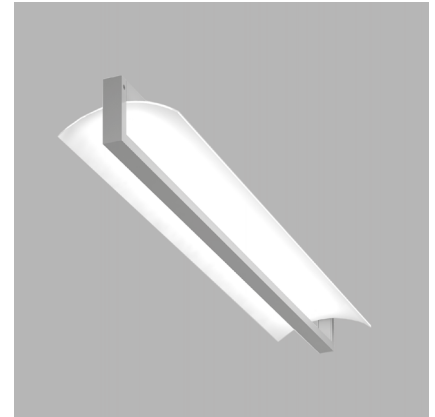

Wing AR

SURFACE

Wing AR reflects simple soft forms and makes an ideal solution for interior architectural spaces. Pendant, wall, or ceiling vertically or horizontally mounted with indirect LED lighting. Wing AR provides glare-free indirect illumination. It is perfect for stairways and corridors with open ceilings.



Size	
26	26" [660mm]
37	37" [940mm]
49	49" [1245mm]
	Custom



* Continuous multiple fixture configurations available
* See page 131 for technical details and specification

Wing AR

SURFACE



SPECIFICATION SHEET

Wing AR

