

# Aline 70

SURFACE



## SPECIFICATION SHEET

### Aline 70



#### Model 1550

#### Type

S Surface

#### Size

48 49.1" [1246mm]  
60 60.9" [1547mm]  
72 72.8" [1848mm]  
84 84.6" [2149mm]

Custom

#### Wattage<sup>1,2</sup>

#### 48"

L 12W (1600lm)  
M 24W (2970lm)

#### 60"

L 15W (2000lm)  
M 30W (3715lm)

#### 72"

L 18W (2400lm)  
M 36W (4460lm)

#### 84"

L 21W (2800lm)  
M 42W (5200lm)

#### Color Temp<sup>3</sup>

30 3000  
35 3500  
40 4000

#### Voltage

U 120/277 Volt  
1 120 Volt (DFPN only - see section Control)

#### Driver

RD Remote

#### Control - RD

S Non-dim  
D010 0-10V 10%  
DFPN Lutron Forward Phase 1% 120 Volt  
L3DAE Lutron Hi-lume 1% EcoSystem  
L3DOE Hi-lume Premier 0.1% EcoSystem

#### Diffuser Bottom

SW Satin opal acrylic

#### Finish


16 Clear anodized aluminum  
21 Painted white - RAL 9010 matte  
26 Painted black - RAL 9005 matte  
22 Painted custom color

#### Notes

1 Nominal lumens value specified  
2 Linear LED board, constant voltage 24 Volt  
3 90+ CRI standard

#### Example fixture number:

1550 - S - 48 - L - 30 - U - RD - S - SW - 16

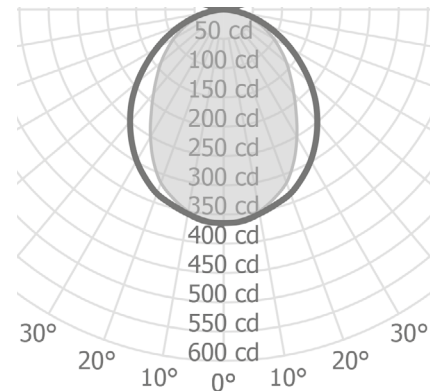



# Aline 70

## SURFACE

A clean design and simple technical details are the design principles of the Aline 70 lighting system. Suitable for conference spaces and office areas.



Size	
48	49.1" [1246mm]
60	60.9" [1547mm]
72	72.8" [1848mm]
84	84.6" [2149mm]
Custom	



- \* 70mm x 70mm fixture body profile
- \* Continuous fixture with hairline fixture segments connection
- \* Fixture is ADA compliant



# Aline 70

SURFACE



## SPECIFICATION SHEET

Aline 70

