

**SURFACE** 



## **SPECIFICATION SHEET**

### Aura

Model 1520	
Type S	Surface
Size	
15	15.6" [396mm]
18	18.6" [472mm]
22	22.6" [574mm]
25	25.6" [651mm]
30	30.0" [763mm]
36	36.0" [915mm]
Custom	

#### Wattage 1, 2

15" L 8W (1065lm)

M 16W (1980lm)
18"
L 11W (1465lm)
M 22W (2725lm)
22"
L 21W (2800lm)
M 42W (5200lm)

25" L 27W (3600lm) M 54W (6690lm) 30" L 40W (5335lm) M 80W (9905lm) 36"

**Color Temp** <sup>3</sup>
30 3000
35 3500
40 4000

L 65W (8665lm)

#### Voltage

U 120/277 Volt

1 120 Volt (DFPN only – see section Control)

#### Driver 4,5

RD Remote ID Integral

#### Control - (RD/ID)

D010 0-10V 10%
DFPN Lutron Forward Phase 1% 120 Volt
L3DAE Lutron Hi-lume 1% EcoSystem
L3DOE Hi-lume Premier 0.1% EcoSystem
(remote only)

#### **Diffuser Bottom**

SW Satin opal acrylic

Non-dim

#### **Diffuser Top**

SW Satin opal acrylic

#### Finish

19	Painted anodized aluminum -
	RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color


#### **Notes**

1	Nominal lumens value specified
2	Linear LED board, constant voltage
	24 Volt
3	90+ CRI standard
4	Remote driver for 15" and 18" sizes
5	Integral or remote driver for 22", 25"
	30" and 36" sizes

#### Example fixture number:

1520 - S - 25 - L - 30 - U - ID - S - SW - SW - 19





# Aura


#### SURFACE

Aura was designed and engineered to achieve visual comfort in every kind of workplace. Direct lighting with an indirectly illuminated ring around the fixture. The design of the luminaire is particularly popular and is especially suitable for meeting rooms.



Size	
15	15.6" [396mm]
18	18.6" [472mm]
22	22.6" [574mm]
25	25.6" [651mm]
30	30.0" [763mm]
36	36.0" [915mm]
Cust	om



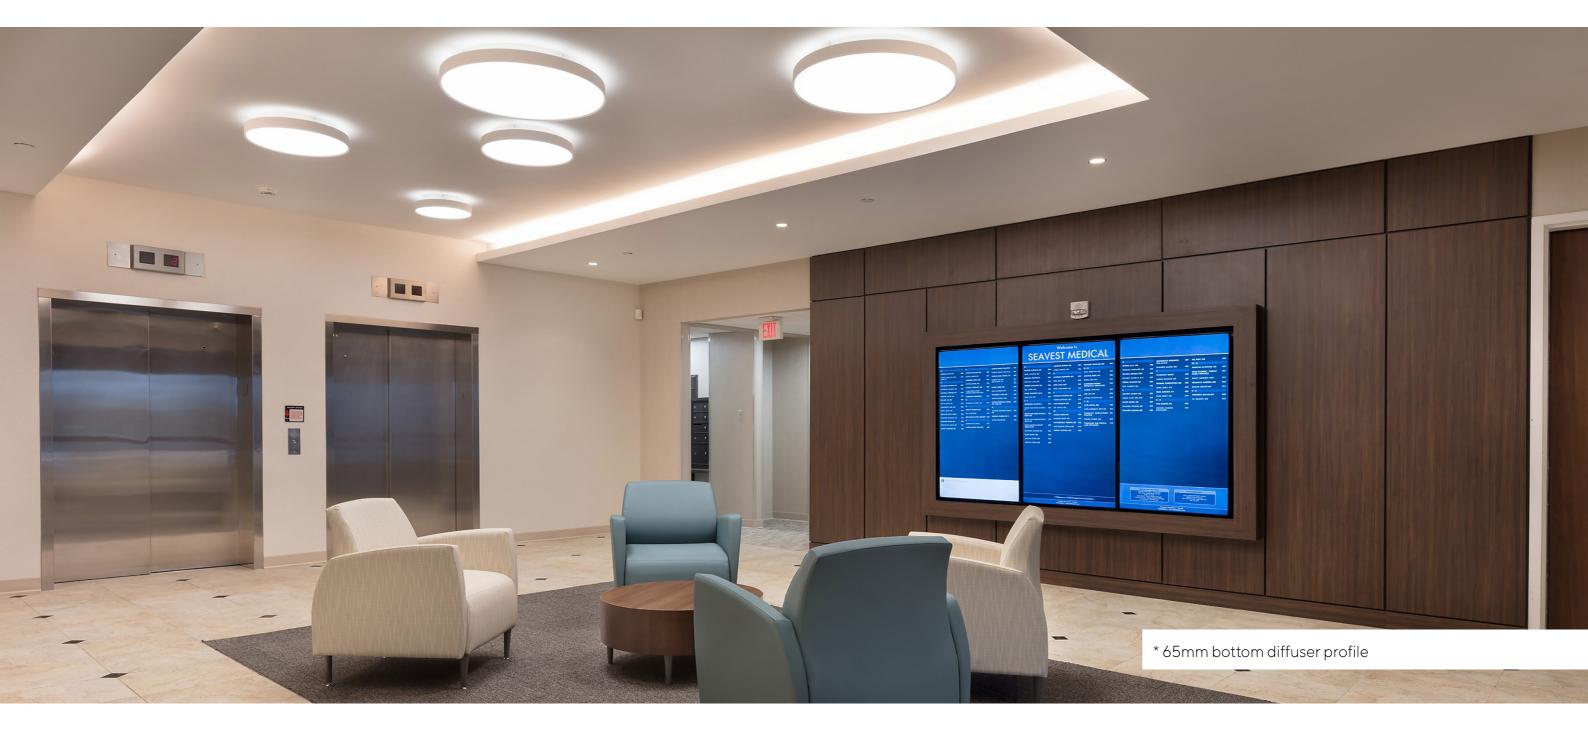




**SURFACE** 




# **SPECIFICATION SHEET**

Aura



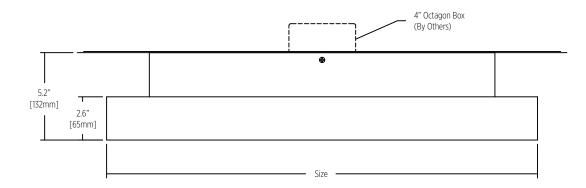

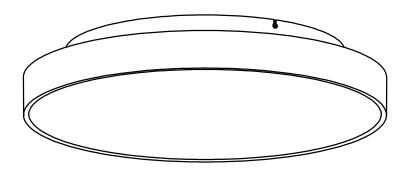

#### Note:

- \* For sizes 15.6" [396mm] and 18.6" [472mm] Diameter Driver is remote - Order separately
- \* For sizes 22.6" [573mm] and larger, there are additional holes in the mounting box (panel) for secure installation (mounting hardware provided)

See Installation Instructions for details

www.almlighting.com 1