

Ciro RD

CEILING



SPECIFICATION SHEET

Ciro RD



Model 1282

Type

C Ceiling

Size

7 7.0" [178mm]
12 12.0" [305mm]
Custom

Wattage^{1,2}

M 8.4W (1310lm)
H 12.6W (1710lm)

Color Temp³

30 3000
35 3500
40 4000

Voltage

U 120/277 Volt
1 120 Volt (DFPN only – see section Control)

Driver

RD Remote
ID Integral

Control - (RD/ID)

S Non-dim
D010 0-10V 10%
ECO30W EldoLED 0-10V 1% (remote only)
DFPN Lutron Forward Phase 1% 120 Volt (remote only)
PEQ1 Lutron Hi-lume 1% EcoSystem (remote only)
PEQ0 Lutron Hi-lume Premier 0.1% EcoSystem (remote only)

Diffuser

SA Satin clear acrylic

Finish


19 Painted anodized aluminum - RAL 9006 matte
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Notes

- 1 Nominal lumens value specified
- 2 Downlight LED module, constant current 18 Volt 500 mA - 8.4 W, 700 mA - 12.6 W 90+ CRI standard
- 3

Example fixture number:

1282 - C - 7 - M - 30 - U - ID - S - SA - 19

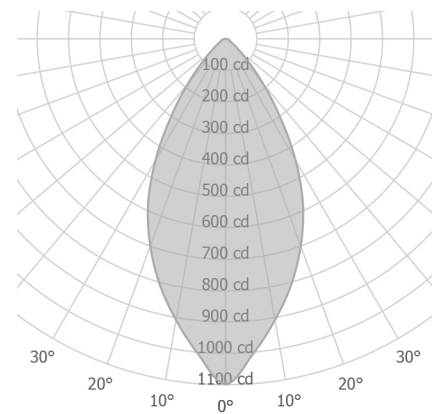

Ciro RD

CEILING

The cylindrical shaped fixture is specially designed for ceiling installation. Elegant, precise downlight which captures even larger architectural spaces. Elegant, durable downlight that works for modern office spaces.



Size	
7	7" [178mm]
12	12" [305mm]
Custom	



* 100mm diameter fixture body
* Available in 7" [178mm] and 12" [305mm] long body

Ciro RD

CEILING



SPECIFICATION SHEET

Ciro RD

