

Ciro RD

PENDANT



SPECIFICATION SHEET

Ciro RD



Model 1282

Type

P Pendant

Size

7 7.0" [178mm]
12 12.0" [305mm]
Custom

Wattage ^{1,2}

M 8.4W (1310lm)
H 12.6W (1710lm)

Color Temp ³

30 3000
35 3500
40 4000

Voltage

U 120/277 Volt
1 120 Volt (DFPN only - see section Control)

Driver

RD Remote
ID Integral

Control - (RD/ID)

S Non-dim
D010 0-10V 10%
ECO30W EldoLED 0-10V 1% (remote only)
DFPN Lutron Forward Phase 1% 120 Volt (remote only)
PEQ1 Lutron Hi-lume 1% EcoSystem (remote only)
PEQ0 Lutron Hi-lume Premier 0.1% EcoSystem (remote only)

Diffuser

SA Satin clear acrylic

Finish ⁴

19 Painted anodized aluminum - RAL 9006 matte
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Mounting

PC Power cable

Power Cable ⁵


CC Clear insulated cable (standard)
WC White cable
BC Black cable

Notes

- 1 Nominal lumens value specified
- 2 Downlight LED module, constant current 18 Volt 500 mA - 8.4 W, 700 mA - 12.6 W
- 3 90+ CRI standard
- 4 Canopy finish matches housing
- 5 96" standard power cable length

Example fixture number:

1282 - P - 7 - M - 30 - U - ID - S - SA - 19 - PC - CC

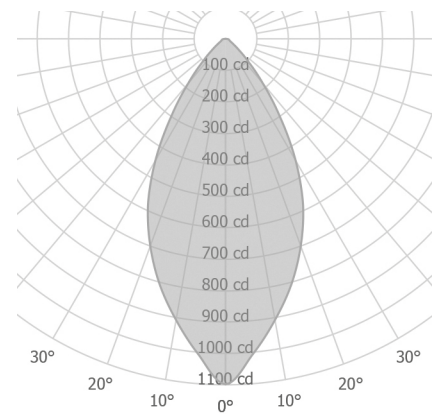

Ciro RD

PENDANT


Ciro RD is a simple, economical solution to provide accent illumination. Giro RD can be used as a suspended or ceiling luminaire. Machined aluminum construction improves design details.



Size	
7	7" [178mm]
12	12" [305mm]
Custom	



* 100mm diameter fixture body
* Available in 7" [178mm] and 12" [305mm] long body

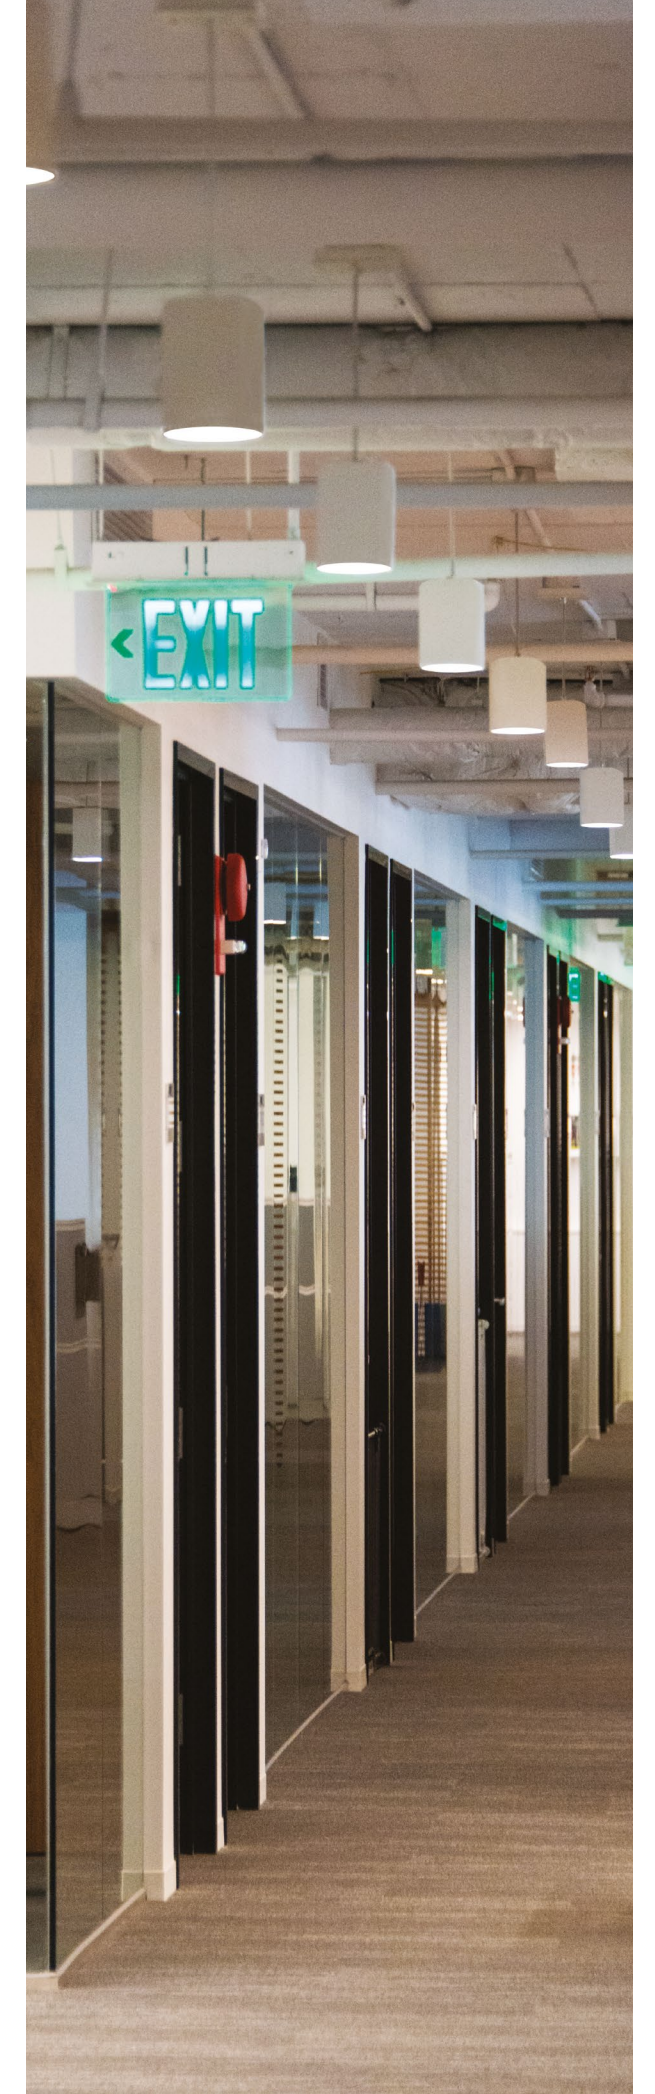

Ciro RD

PENDANT





SPECIFICATION SHEET

Ciro RD





INSTALLATION TYPE

Straight power cable with integral driver

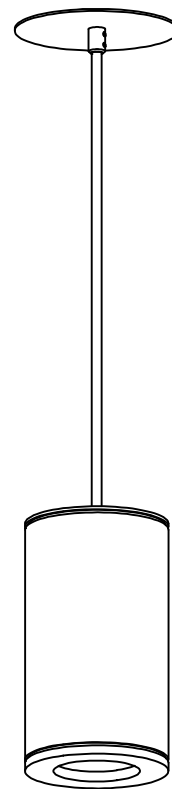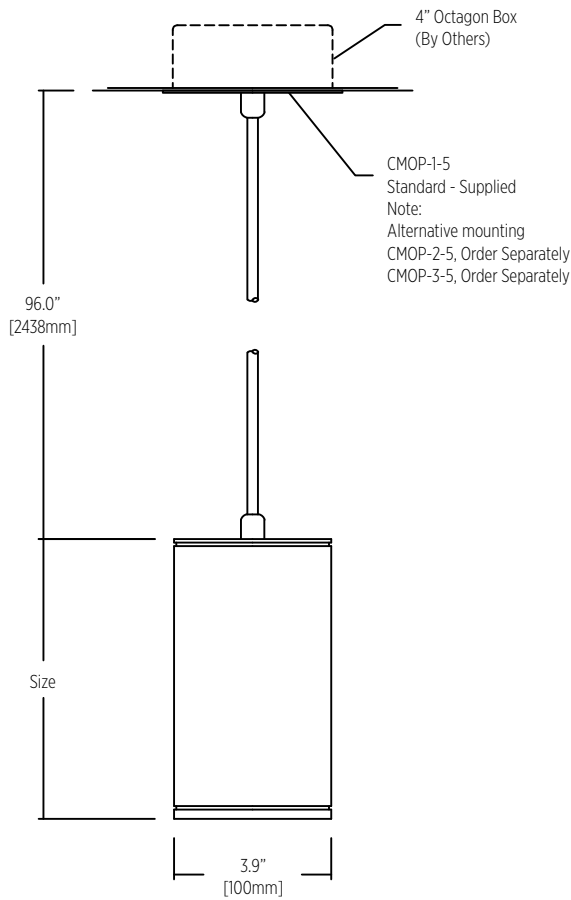

CMOP-1-5 Standard - Supplied

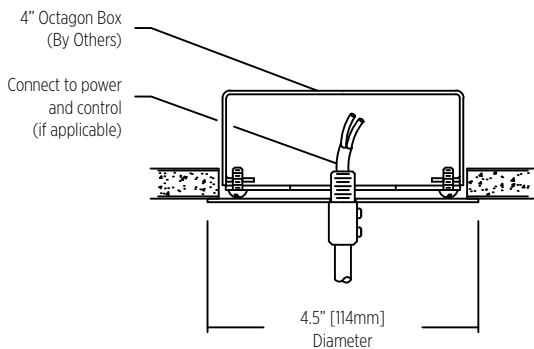

Mounting Option Power 1-5
Octagon Box (By Others)
Installed in drywall, wood or concrete ceiling

Ciro RD

PENDANT





SPECIFICATION SHEET

Ciro RD





ALTERNATIVE MOUNTING OPTION

CMOP-2-5 Order Separately

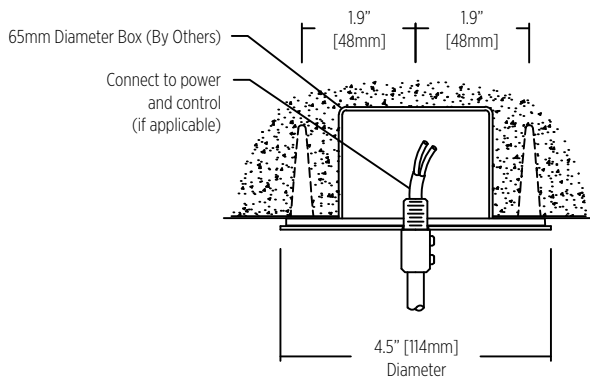

Mounting Option Power 2-5
65mm Diameter Box (By Others)
Installed in drywall, wood or concrete ceiling

CMOP-3-5 Order Separately

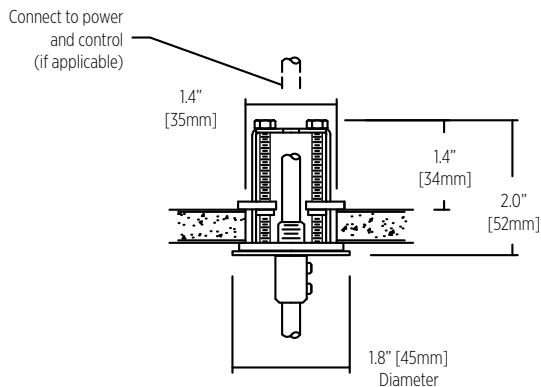

Mounting Option Power 3-5
Suspension Assembly
Installed in drywall or wood ceiling