

# Ciro SQ

CEILING



## SPECIFICATION SHEET

Ciro SQ



### Model 1280

#### Type

C Ceiling

#### Size

7 7.0" [178mm]  
12 12.0" [305mm]  
Custom

#### Wattage<sup>1,2</sup>

M 8.4W (1310lm)  
H 12.6W (1710lm)

#### Color Temp<sup>3</sup>

30 3000  
35 3500  
40 4000

#### Voltage

U 120/277 Volt  
1 120 Volt (DFPN only – see section Control)

#### Driver

RD Remote  
ID Integral

#### Control - (RD/ID)

S Non-dim  
D010 0-10V 10%  
ECO30W EldoLED 0-10V 1% (remote only)  
DFPN Lutron Forward Phase 1% 120 Volt (remote only)  
PEQ1 Lutron Hi-lume 1% EcoSystem (remote only)  
PEQ0 Lutron Hi-lume Premier 0.1% EcoSystem (remote only)

#### Diffuser

SA Satin clear acrylic

#### Finish


19 Painted anodized aluminum - RAL 9006 matte  
21 Painted white - RAL 9010 matte  
26 Painted black - RAL 9005 matte  
22 Painted custom color

#### Notes

1 Nominal lumens value specified  
2 Downlight LED module, constant current 18 Volt 500 mA - 8.4 W, 700 mA - 12.6 W 90+ CRI standard  
3

#### Example fixture number:

1280 - C - 7 - M - 30 - U - ID - S - SA - 19

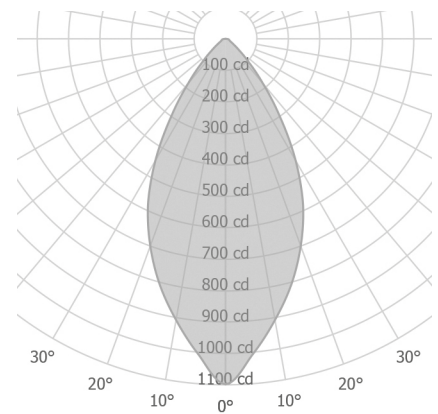



# Ciro SQ

## CEILING

Downlight fixture with clean design and machined aluminum construction.   
Ciro's square shape gives essential elements to architectural areas.



Size	
7	7" [178mm]
12	12" [305mm]
Custom	



\* 100mm square fixture body  
\* Available in 7" [178mm] and 12" [305mm] long body



# Ciro SQ

CEILING



## SPECIFICATION SHEET

Ciro SQ

