

# City Indoor

WALL



## SPECIFICATION SHEET

### City Indoor



#### Model 1825

#### Type

W Wall

#### Size

27	27.0" [686mm]
39	39.0" [991mm]
51	51.0" [1295mm]
63	63.0" [1600mm]
Custom	

#### Wattage<sup>1,2</sup>

<b>27"</b>	L 5W (665lm)
	M 10W (1240lm)
<b>39"</b>	L 8W (1065lm)
	M 16W (1980lm)
<b>51"</b>	L 11W (1465lm)
	M 22W (2725lm)
<b>63"</b>	L 14W (1865lm)
	M 28W (3465lm)

#### Color Temp<sup>3</sup>

30	3000
35	3500
40	4000

#### Voltage

U	120/277 Volt
1	120 Volt (DFPN only - see section Control)

#### Driver

RD Remote

#### Control - RD

S	Non-dim
D010	0-10V 10%
DFPN	Lutron Forward Phase 1% 120 Volt
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem

#### Diffuser

SA Satin clear acrylic

#### Finish


19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

#### Notes

- 1 Nominal lumens value specified
- 2 Linear LED board, constant voltage 24 Volt
- 3 90+ CRI standard

#### Example fixture number:

1825 - W - 39 - L - 30 - U - RD - S - SA - 19

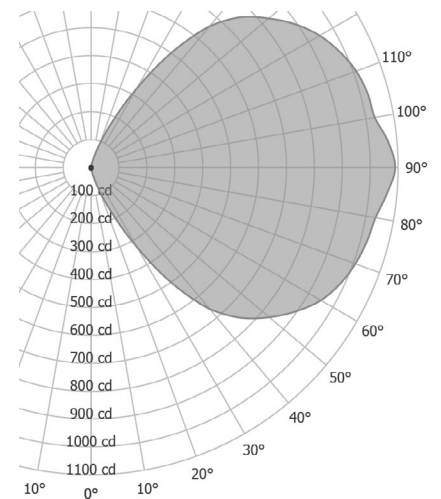

# City Indoor

WALL

Emits soft, diffused indirect light. Creates suitable illumination for hallways and stairs.

The simple clean lines of the fixture are an ideal solution for interior architectural structures.

Wall mounted, vertically or horizontally oriented with indirect LED lighting.



Size	
27	27" [686mm]
39	39" [991mm]
51	51" [1,295mm]
63	63" [1,600mm]
Custom	



\* 50mm wide extruded aluminum profile  
\* Fixture is ADA compliant

# City Indoor

WALL



## SPECIFICATION SHEET

City Indoor

