

City Outdoor



WALL

SPECIFICATION SHEET

City Outdoor



Model 1825WL ¹

Type

W Wall

Size

27 27.0" [686mm]
 39 39.0" [991mm]
 51 51.0" [1295mm]
 63 63.0" [1600mm]
 Custom

Wattage ^{2,3}

27"
 L 8W (765lm)
 39"
 L 12W (1,225lm)
 51"
 L 17W (1,685lm)
 63"
 L 21W (2,140lm)

Color Temp ⁴

30 3000
 35 3500
 40 4000

Voltage

U 120/277 Volt
 1 120 Volt (DFPN only – see section Control)

Driver

RD Remote

Control - RD

S Non-dim
 D010 0-10V 10%
 DFPN Lutron Forward Phase 1% 120 Volt
 L3DAE Lutron Hi-lume 1% EcoSystem
 L3DOE Hi-lume Premier 0.1% EcoSystem

Diffuser

SA Satin clear acrylic

Finish


19 Painted anodized aluminum - RAL 9006 matte
 21 Painted white - RAL 9010 matte
 26 Painted black - RAL 9005 matte
 22 Painted custom color

Notes

- 1 Suitable for wet location, IP65 rated LED tape
- 2 Nominal lumens value specified
- 3 LED tape, constant voltage 24 Volt
- 4 90+ CRI standard

Example fixture number:

1825WL - W - 39 - L - 30 - U - RD - S - SA - 19

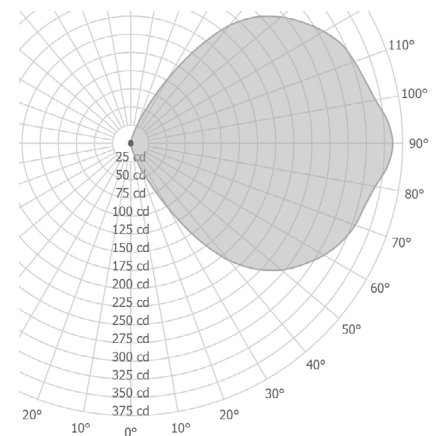

City Outdoor

WALL

The simple clean lines of the fixture are an ideal solution for any style of architecture. Wall mounted, vertically or horizontally oriented, this outdoor-rated luminaire is perfect for an accent or entrance application. The cutting-edge technology and construction techniques are used to manufacture this geometrically simple form. Ideal illumination for architectural entrances or hallways.



Size	
27	27" [686mm]
39	39" [991mm]
51	51" [1295mm]
63	63" [1600mm]
Custom	



* 50mm wide extruded aluminum profile
* Fixture is ADA compliant

City Outdoor

WALL



SPECIFICATION SHEET

City Outdoor

