

ClearLine

CEILING



SPECIFICATION SHEET

ClearLine



Model CL2

Type
C Ceiling

Size

36	36.0" [914mm]
48	48.0" [1219mm]
60	60.0" [1524mm]
72	72.0" [1829mm]
96	96.0" [2438mm]
Custom	

Wattage^{1,2}

36"
L 9W (1200lm)
M 18W (2230lm)

48"
L 12W (1600lm)
M 24W (2970lm)

60"
L 15W (2000lm)
M 30W (3715lm)

72"
L 18W (2400lm)
M 36W (4460lm)

96"
L 24W (3200lm)
M 48W (5945lm)

Color Temp³

30	3000
35	3500
40	4000

Voltage

U	120/277 Volt
1	120 Volt (DFPN only - see section Control)

Driver

RD	Remote
ID	Integral

Control - (RD/ID)

S	Non-dim
D010	0-10V 10%
DFPN	Lutron Forward Phase 1% 120 Volt
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem (remote only)

Diffuser Bottom

SW	Satin opal acrylic
----	--------------------

Finish


16	Clear anodized aluminum
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Notes

- Nominal lumens value specified
- Linear LED board, constant voltage 24 Volt
- 90+ CRI standard

Example fixture number:


CL2 - C - 48 - L - 30 - U - ID - S - SW - 16

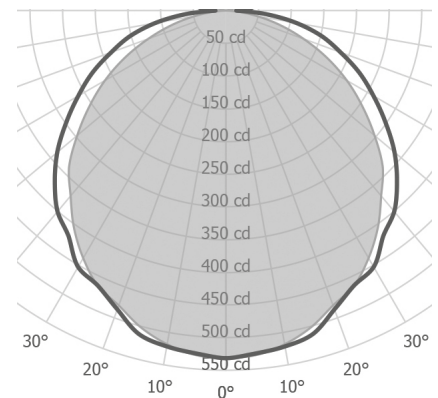

ClearLine

CEILING

ClearLine Ceiling is a clean, linear form for general illumination. A clean, elegant design and simple technical details are the design principles of the ClearLine profile lighting system. A Satin Acrylic lens provides soft diffused light.

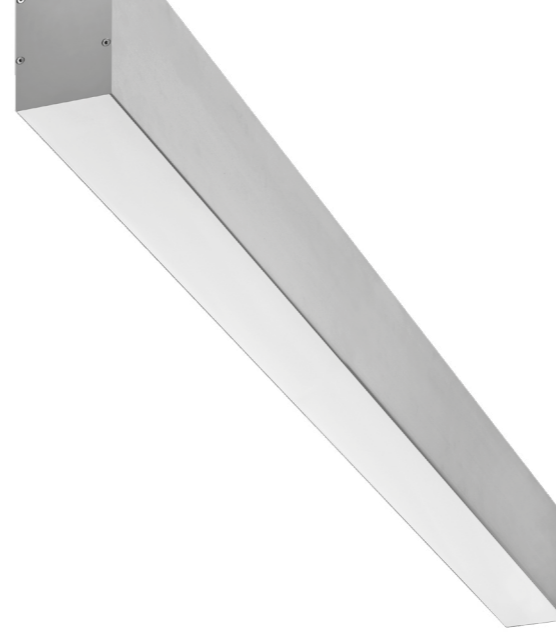

Size	
36	36" [914mm]
48	48" [1,219mm]
60	60" [1,524mm]
72	72" [1,829mm]
96	96" [2,438mm]
Custom	



* 78mm x 133mm fixture body profile
* Continuous fixture with hairline fixture segments connection

ClearLine

CEILING



SPECIFICATION SHEET

ClearLine

