

ClearLine

PENDANT



SPECIFICATION SHEET

ClearLine



Model CL2

Type

P Pendant

Size

36	36.0" [914mm]
48	48.0" [1219mm]
60	60.0" [1524mm]
72	72.0" [1829mm]
96	96.0" [2438mm]
Custom	

Wattage^{1,2}

Direct³

36"

LD 9W (1200lm)
MD 18W (2230lm)

48"

LD 12W (1600lm)
MD 24W (2970lm)

60"

LD 15W (2000lm)
MD 30W (3715lm)

72"

LD 18W (2400lm)
MD 36W (4460lm)

96"

LD 24W (3200lm)
MD 48W (5945lm)

XD – No Direct

Indirect⁴

LI 9W (1200lm)
MI 18W (2230lm)

LI 12W (1600lm)
MI 24W (2970lm)

LI 15W (2000lm)
MI 30W (3715lm)

LI 18W (2400lm)
MI 36W (4460lm)

LI 24W (3200lm)
MI 48W (5945lm)

XI – No Indirect

Color Temp⁵

30	3000
35	3500
40	4000

Voltage

U	120/277 Volt
1	120 Volt (DFPN only – see section Control)

Driver

RD	Remote
ID	Integral

Control - (RD/ID)

S	Non-dim
D010	0-10V 10%
DFPN	Lutron Forward Phase 1% 120 Volt
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem (remote only)

Diffuser Bottom

SW	Satin opal acrylic
CB	Extruded aluminum – painted to match the fixture

Diffuser Top

SA	Satin clear acrylic
CT	Extruded aluminum – painted to match the fixture

Finish⁶

16	Clear anodized aluminum
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Mounting

SC	Straight cables
----	-----------------

Circuit

CS	Circuit - Single
CD	Circuit - Dual

Power Cable⁷


CC	Clear insulated cable (standard)
WC	White cable
BC	Black cable

Notes

- Nominal lumens value specified
- Linear LED board, constant voltage 24 Volt
- For no Direct light specify XD
- For no Indirect light specify XI
- 90+ CRI standard
- Canopy finish matches housing
For Clear anodized aluminum finish, canopy finish will be painted anodized aluminum
- 96" standard cable length

Example fixture number:

CL2 - P - 48 - LD - LI - 30 - U - ID - S - SW - SA - 16 - SC - CS - CC

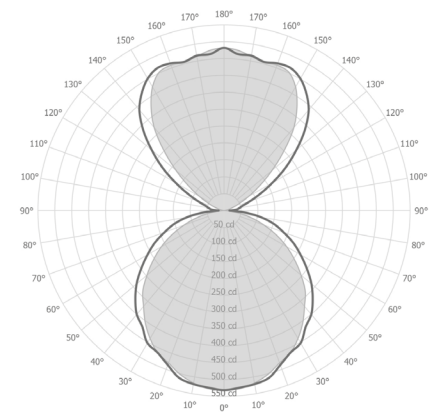

ClearLine

PENDANT

The ClearLine pendant is designed for direct and indirect illumination in offices or reception desks. Fixture mounts via aircraft cables. Cable grippers used, allow one to adjust mounting height without tools.



Size	
36	36" [914mm]
48	48" [1,219mm]
60	60" [1,524mm]
72	72" [1,829mm]
96	96" [2,438mm]
Custom	



* 78mm x 133mm fixture body profile
* Continuous fixture with hairline fixture segments connection

ClearLine

PENDANT






SPECIFICATION SHEET

ClearLine



INSTALLATION TYPE

Straight cables with integral driver

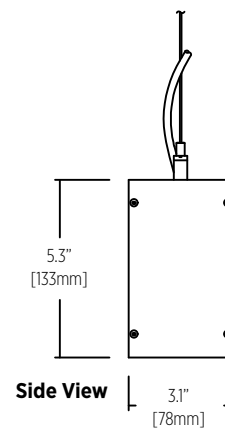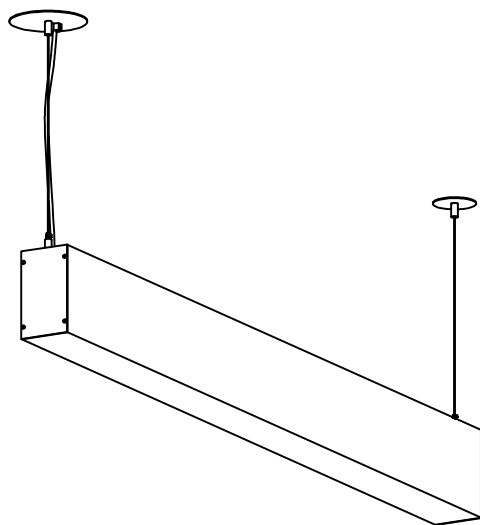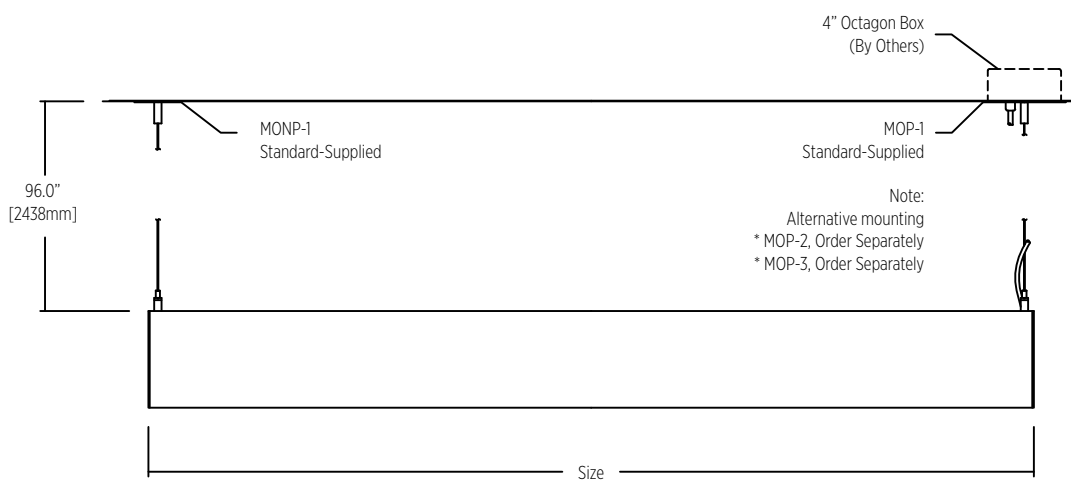

ClearLine

PENDANT





SPECIFICATION SHEET

ClearLine





STRAIGHT CABLES MOUNTING OPTION - POWER

MOP-1 Standard - Supplied

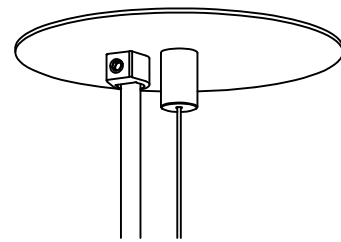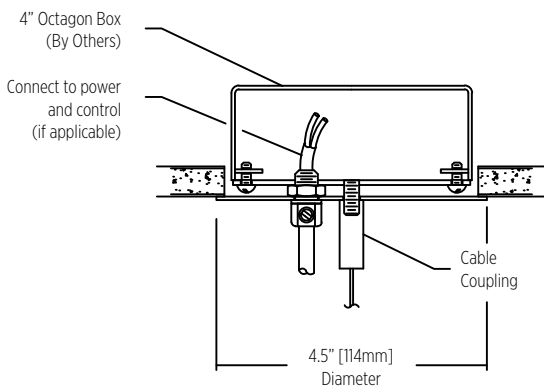



Mounting Option Power 1
Octagon Box (By Others)
Installed in drywall, wood or concrete ceiling

MOP-2-1 Order Separately

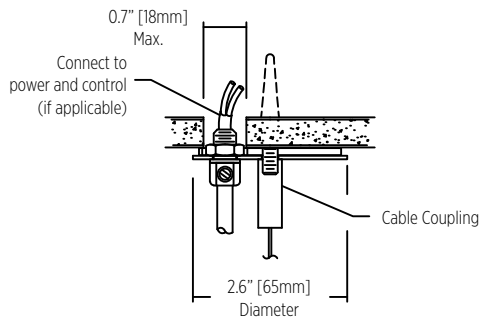

Mounting Option Power 2-1
Suspension assembly
Installed in drywall or wood ceiling

MOP-2-2 Order Separately

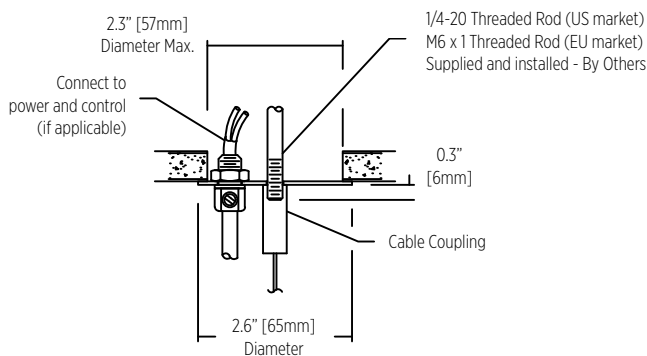

Mounting Option Power 2-2
Suspension assembly
Installed in drywall or wood ceiling

ClearLine

PENDANT





SPECIFICATION SHEET

ClearLine





MOP-3 Order Separately

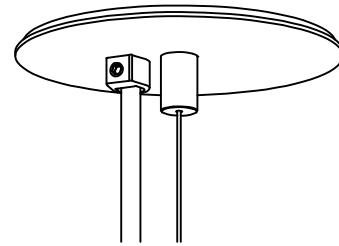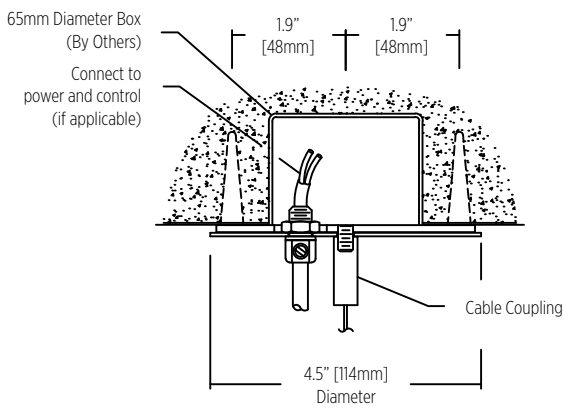

Mounting Option Power 3
65mm Diameter Box (By Others)
Installed in drywall, wood or concrete ceiling



STRAIGHT CABLES MOUNTING OPTION - NON POWER

MONP-1-1 Standard - Supplied

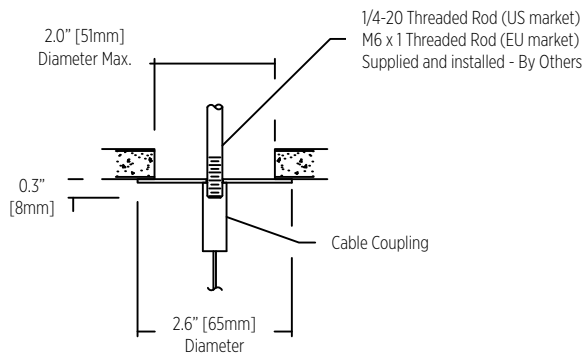

Mounting Option - Non Power
Threaded Rod installed to structural ceiling (By Others)

MONP-1-2 Alternative - Supplied

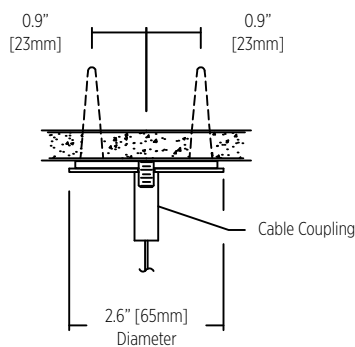

Mounting Option - Non Power
Suspension Assembly
Installed in drywall, wood or concrete ceiling