

Delta 40

SURFACE



SPECIFICATION SHEET

Delta 40



Model 1770

Type

S Surface

Size

26 26.4" [670mm]
38 38.2" [971mm]
50 50.0" [1271mm]
Custom

Wattage ^{1,2}

26"
L 6W (800lm)
M 12W (1485lm)
38"
L 9W (1200lm)
M 18W (2230lm)
50"
L 12W (1600lm)
M 24W (2970lm)

Color Temp ³

30 3000
35 3500
40 4000

Voltage

U 120/277 Volt
1 120 Volt (DFPN only - see section Control)

Driver

RD Remote

Control - RD

S Non-dim
D010 0-10V 10%
DFPN Lutron Forward Phase 1% 120 Volt
L3DAE Lutron Hi-lume 1% EcoSystem
L3DOE Hi-lume Premier 0.1% EcoSystem

Diffuser

SA Satin clear acrylic

Finish


19 Painted anodized aluminum - RAL 9006 matte
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Notes

1 Nominal lumens value specified
2 Linear LED board, constant voltage 24 Volt
3 90+ CRI standard

Example fixture number:

1770 - S - 38 - L - 30 - U - RD - S - SA - 19

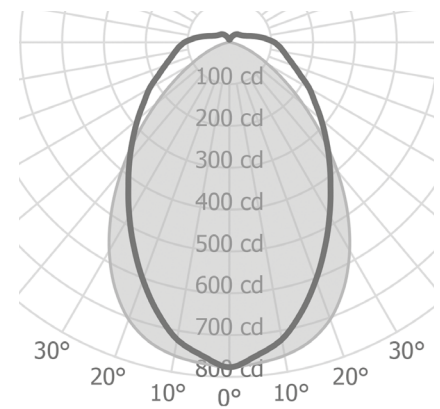

Delta 40

SURFACE

Suspended or surface luminaire with extruded aluminum housing and machined end caps. The diffuser is Satin Clear Acrylic. The surface option can be arranged vertically or horizontally. Functional, architectural, and decorative detail for many applications. Suitable for conference rooms or larger spaces when used in multiple configurations.



Size	
26	26.4" [670mm]
38	38.2" [971mm]
50	50.0" [1,271mm]
Custom	



* 40mm diameter fixture diffuser profile
* Fixture is ADA compliant







Delta 40

SURFACE



SPECIFICATION SHEET

Delta 40

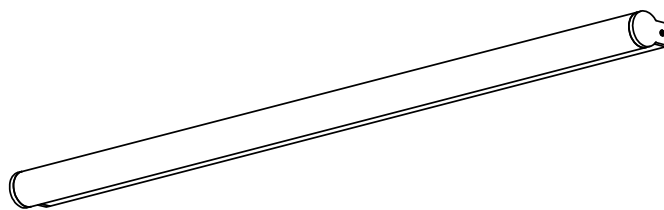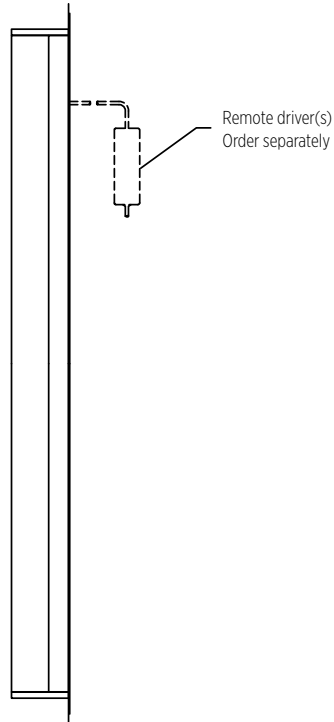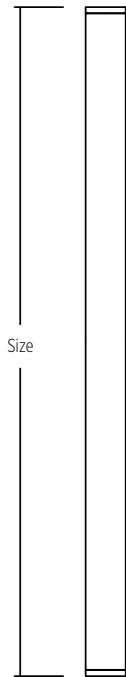

**Vertically or
Horizontally
Oriented**