

# Frame 70

SURFACE



## SPECIFICATION SHEET

### Frame 70



#### Model 1545

##### Type

S Surface

##### Size

24 24.0" [610mm]  
36 36.0" [914mm]  
48 48.0" [1219mm]  
Custom

##### Wattage <sup>1,2</sup>

##### 24"

L 20W (2665lm)  
M 40W (4955lm)

##### 36"

L 32W (4265lm)  
M 64W (7925lm)

##### 48"

L 44W (5865lm)  
M 88W (10895lm)

##### Color Temp <sup>3</sup>

30 3000  
35 3500  
40 4000

##### Voltage

U 120/277 Volt  
1 120 Volt (DFPN only – see section Control)

##### Driver

RD Remote

##### Control - RD

S Non-dim  
D010 0-10V 10%  
DFPN Lutron Forward Phase 1% 120 Volt  
L3DAE Lutron Hi-lume 1% EcoSystem  
L3DOE Hi-lume Premier 0.1% EcoSystem

##### Diffuser Bottom

SW Satin opal acrylic

##### Finish


16 Clear anodized aluminum  
21 Painted white - RAL 9010 matte  
26 Painted black - RAL 9005 matte  
22 Painted custom color

##### Notes

- 1 Nominal lumens value specified
- 2 Linear LED board, constant voltage 24 Volt
- 3 90+ CRI standard

##### Example fixture number:

1545 - S - 36 - L - 30 - U - RD - S - SW - 16

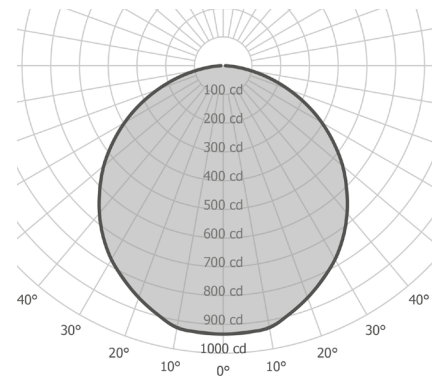


# Frame 70

## SURFACE

In various sizes, Frame 70 is suitable for individual workspace task lighting, conference rooms or larger spaces when used in multiple configurations. Extruded aluminum construction allows the flexibility to alter the dimensions easily and economically.



Size	
24	24" [610mm]
36	36" [915mm]
48	48" [1,219mm]
Custom	

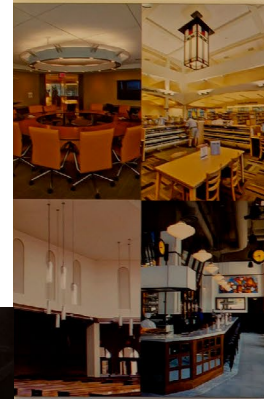

\* 70mm x 70mm fixture body profile  
\* Fixture is ADA compliant

# Frame 70

SURFACE



## SPECIFICATION SHEET

Frame 70

