

Linea 50

PENDANT



SPECIFICATION SHEET

Linea 50



Model 1672

Type

P Pendant

Size

48	48.6" [1234mm]
60	60.4" [1535mm]
72	72.3" [1836mm]
84	84.1" [2137mm]
Custom	

Wattage^{1,2}

Direct

48"	
LD 12W (1600lm)	LI 12W (1600lm)
MD 24W (2970lm)	MI 24W (2970lm)
60"	
LD 15W (2000lm)	LI 15W (2000lm)
MD 30W (3715lm)	MI 30W (3715lm)
72"	
LD 18W (2400lm)	LI 18W (2400lm)
MD 36W (4460lm)	MI 36W (4460lm)
84"	
LD 21W (2800lm)	LI 21W (2800lm)
MD 42W (5200lm)	MI 42W (5200lm)

Indirect³

XI - No Indirect

Color Temp⁴

30	3000
35	3500
40	4000

Voltage

U	120/277 Volt
1	120 Volt (DFPN only - see section Control)

Driver

RD Remote

Control - RD

S	Non-dim
D010	0-10V 10%
DFPN	Lutron Forward Phase 1% 120 Volt
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem

Diffuser Bottom

SW Satin opal acrylic

Diffuser Top

SA	Satin clear acrylic
CT	Aluminum - painted to match the fixture

Finish⁵

16	Clear anodized aluminum
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Mounting

PC Power cable

Circuit

CS	Circuit - Single
CD	Circuit - Dual

Power Cable⁶


CC Clear insulated cable

Notes

- Nominal lumens value specified
- Linear LED board, constant voltage 24 Volt
- For no Indirect light specify XI
- 90+ CRI standard
- Canopy finish matches housing
For Clear anodized aluminum finish, canopy finish will be painted anodized aluminum
- 96" standard power cable length

Example fixture number:

1672 - P - 48 - LD - LI - 30 - U - RD - S - SW - SA - 16 - PC - CS - CC

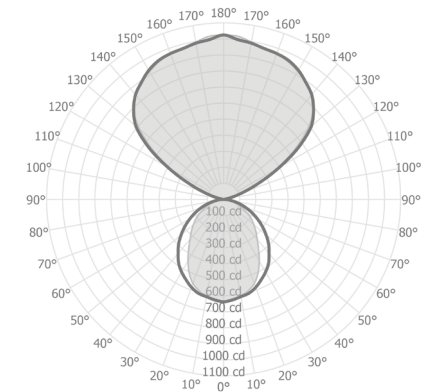



Linea 50

PENDANT

Linea 50 is available in pendant and surface options. The clean essential line of the fixture makes it suitable for use in any modern environment. Streamlined and minimal, the Linea 50 is an elegant and refined option for direct and indirect illumination in offices or reception desks.



Size	
48	48.6" [1234mm]
60	60.4" [1535mm]
72	72.3" [1836mm]
84	84.1" [2137mm]
Custom	



- * 50mm x 50mm fixture body profile
- * Straight power cables mounting option
- * Continuous fixture with hairline fixture segments connection

Linea 50

PENDANT




SPECIFICATION SHEET

Linea 50



INSTALLATION TYPE

Straight power cables with remote driver

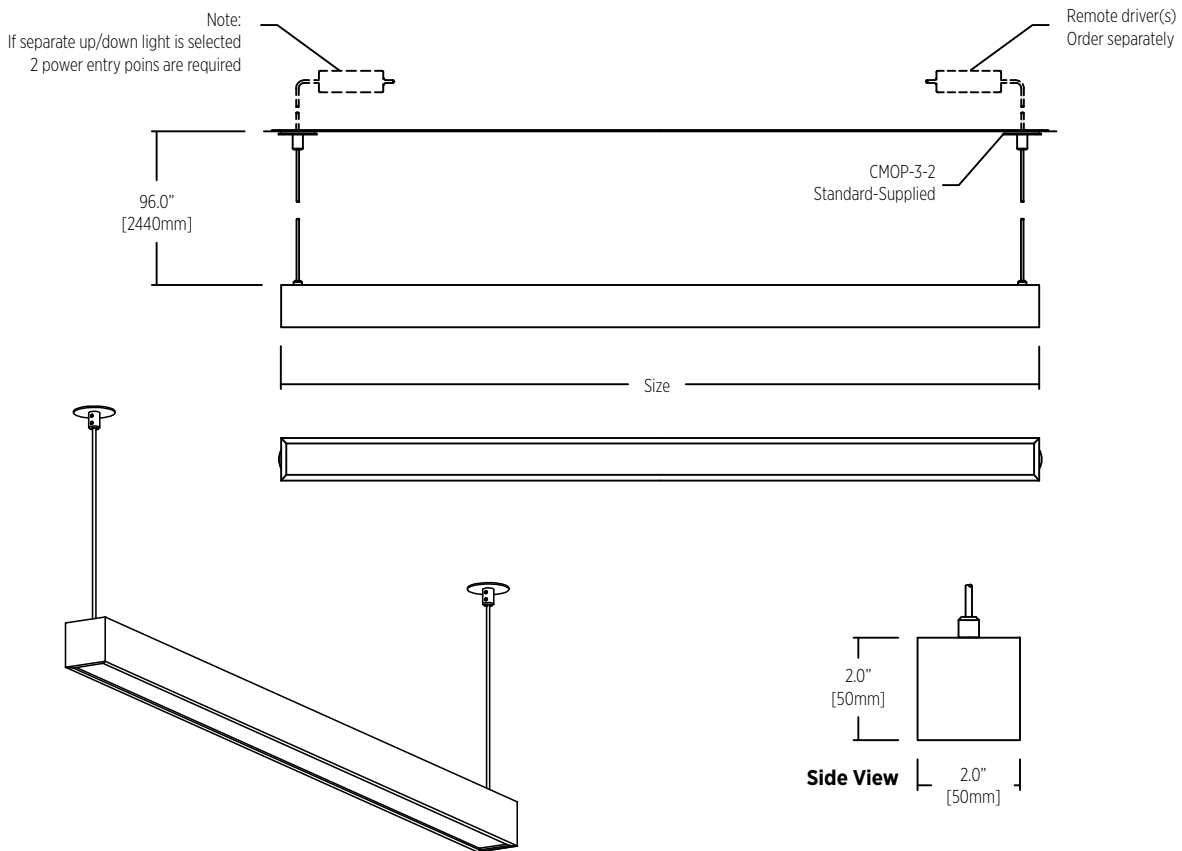

CMOP-3-2 Standard - Supplied

