

# Linea 50

SURFACE



## SPECIFICATION SHEET

Linea 50



### Model 1672

#### Type

S Surface

#### Size

48 48.6" [1234mm]  
60 60.4" [1535mm]  
72 72.3" [1836mm]  
84 84.1" [2137mm]

Custom

#### Wattage<sup>1,2</sup>

##### 48"

L 12W (1600lm)  
M 24W (2970lm)

##### 60"

L 15W (2000lm)  
M 30W (3715lm)

##### 72"

L 18W (2400lm)  
M 36W (4460lm)

##### 84"

L 21W (2800lm)  
M 42W (5200lm)

#### Color Temp<sup>3</sup>

30 3000  
35 3500  
40 4000

#### Voltage

U 120/277 Volt  
1 120 Volt (DFPN only - see section Control)

#### Driver

RD Remote

#### Control - RD

S Non-dim  
D010 0-10V 10%  
DFPN Lutron Forward Phase 1% 120 Volt  
L3DAE Lutron Hi-lume 1% EcoSystem  
L3DOE Hi-lume Premier 0.1% EcoSystem

#### Diffuser Bottom

SW Satin opal acrylic

#### Finish


16 Clear anodized aluminum  
21 Painted white - RAL 9010 matte  
26 Painted black - RAL 9005 matte  
22 Painted custom color

#### Notes

1 Nominal lumens value specified  
2 Linear LED board, constant voltage 24 Volt  
3 90+ CRI standard

#### Example fixture number:

1672 - S - 48 - L - 30 - U - RD - S - SW - 16

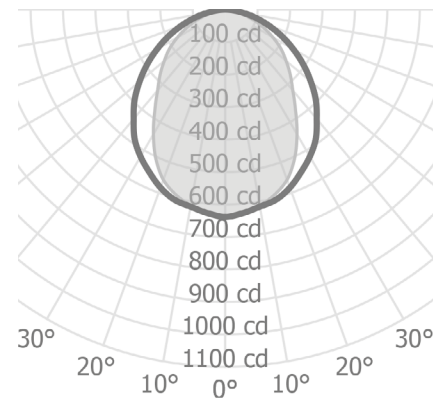

# Linea 50

## SURFACE

The simple design features give the product an elegant and unique appearance. Linear surface mounted fixture with Direct / Indirect light distribution. Extruded aluminum construction with Satin Opal diffuser.



Size	
48	48.6" [1234mm]
60	60.4" [1535mm]
72	72.3" [1836mm]
84	84.1" [2137mm]
Custom	



\* 50mm x 50mm fixture body profile  
\* Fixture is ADA compliant

# Linea 50

SURFACE



## SPECIFICATION SHEET

Linea 50



Remote driver(s)  
Order separately

