

Secant 50

SURFACE



SPECIFICATION SHEET

Secant 50



Model 1671

Type

S Surface

Size

24	24.8" [631mm]
36	36.3" [921mm]
48	47.7" [1211mm]
60	59.1" [1500mm]
72	70.5" [1790mm]

Custom

Wattage^{1,2}

24"

L 16W (2135lm)
M 32W (3965lm)

36"

L 24W (3200lm)
M 48W (5945lm)

48"

L 32W (4265lm)
M 64W (7925lm)

60"

L 40W (5335lm)
M 80W (9905lm)

72"

L 48W (6400lm)
M 96W (11890lm)

Color Temp³

30	3000
35	3500
40	4000

Voltage

U	120/277 Volt
1	120 Volt (DFPN only – see section Control)

Driver

RD Remote

Control - RD

S	Non-dim
D010	0-10V 10%
DFPN	Lutron Forward Phase 1% 120 Volt
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem

Diffuser Bottom

SW Satin opal acrylic

Finish


19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Notes

- 1 Nominal lumens value specified
- 2 Linear LED board, constant voltage 24 Volt
- 3 90+ CRI standard

Example fixture number:

1671 - S - 24 - L - 30 - U - RD - S - SW - 19

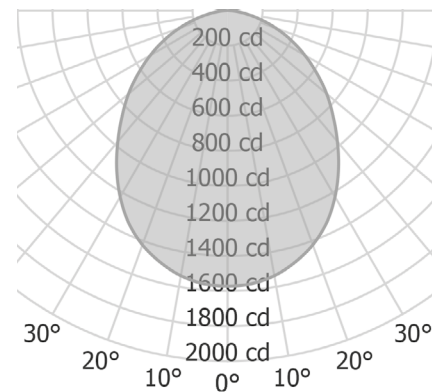


Secant 50

SURFACE

Offering a voluminous effect, Secant 50 is available in pendant and surface versions. Appearance is adaptable according to one's wishes and can be modified. Satin Opal diffuser for general lighting with maximum transmittance and homogeneous lighting.



Size	
24	24.8" [631mm]
36	36.3" [921mm]
48	47.7" [1,211mm]
60	59.1" [1,500mm]
72	70.5" [1,790mm]
Custom	

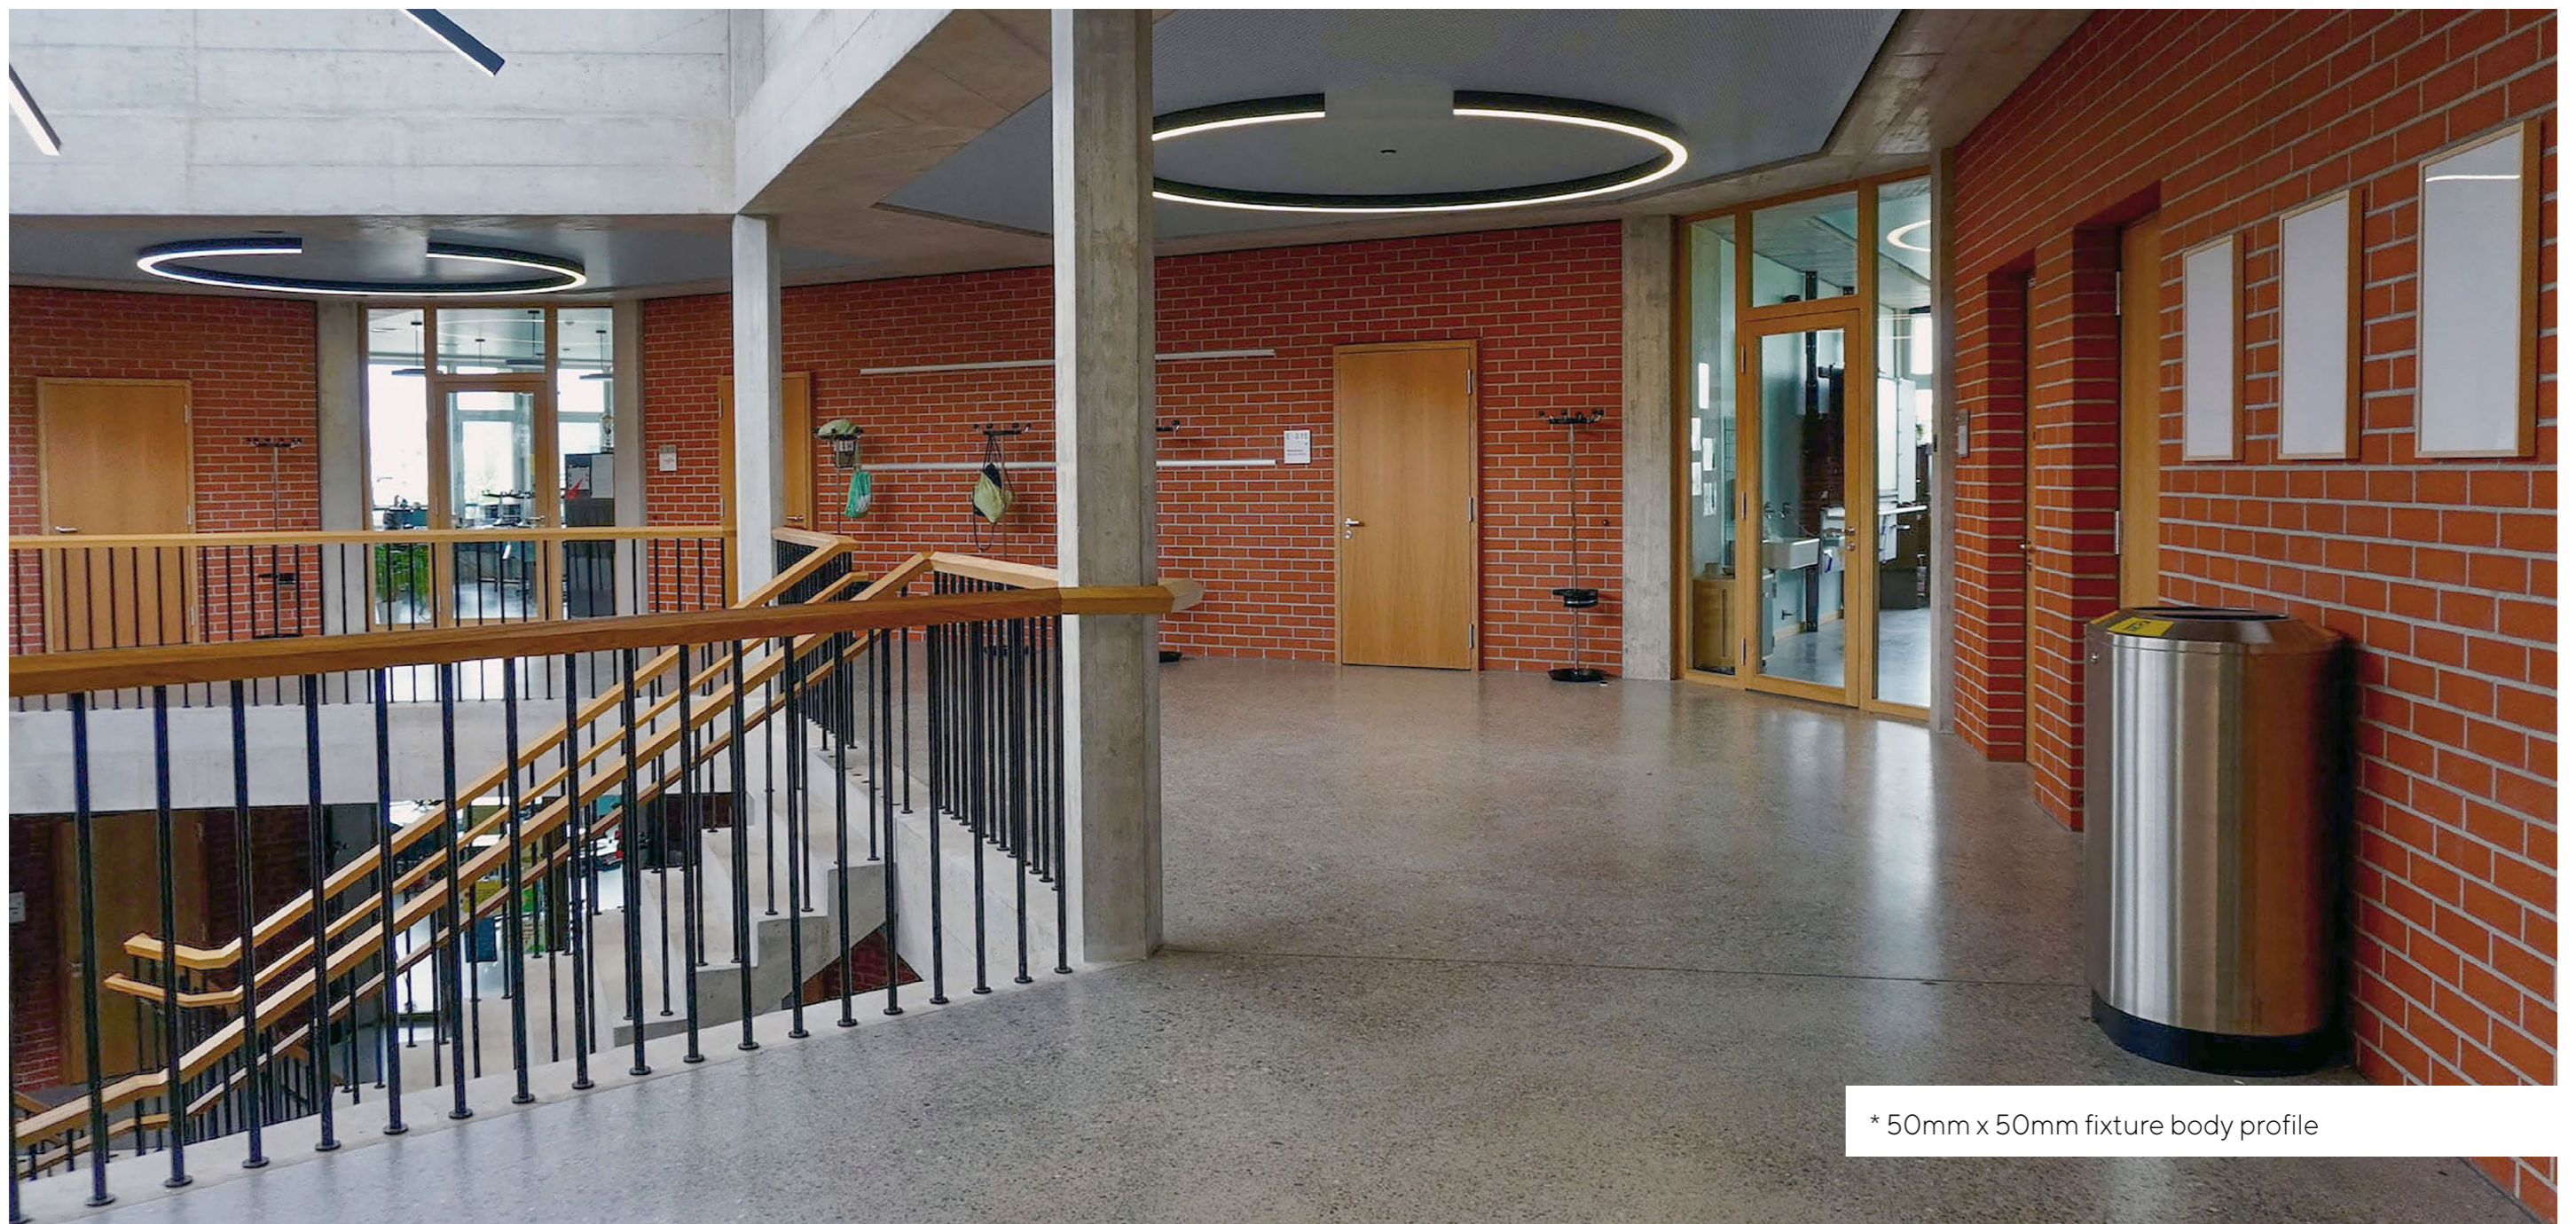

* 50mm x 50mm fixture body profile

Secant 50

SURFACE



SPECIFICATION SHEET

Secant 50

