

Sigma Outdoor



WALL

SPECIFICATION SHEET

Sigma Outdoor



Model 1740WL ¹

Type

W Wall

Size

27 27.0" [686mm]
 39 39.0" [991mm]
 51 51.0" [1295mm]
 Custom

Wattage ^{2,3}

27"
 L 9W (920lm)
 39"
 L 13W (1375lm)
 51"
 L 18W (1835lm)

Color Temp ⁴

30 3000
 35 3500
 40 4000

Voltage

U 120/277 Volt
 1 120 Volt (DFPN only – see section Control)

Driver

RD Remote

Control - RD

S Non-dim
 D010 0-10V 10%
 DFPN Lutron Forward Phase 1% 120 Volt
 L3DAE Lutron Hi-lume 1% EcoSystem
 L3DOE Hi-lume Premier 0.1% EcoSystem

Diffuser

SA Satin clear acrylic

Finish


19 Painted anodized aluminum - RAL 9006 matte
 21 Painted white - RAL 9010 matte
 26 Painted black - RAL 9005 matte
 22 Painted custom color

Notes

- 1 Suitable for wet location, IP65 rated LED tape
- 2 Nominal lumens value specified
- 3 LED tape, constant voltage 24 Volt
- 4 90+ CRI standard

Example fixture number:

1740WL - W - 39 - L - 30 - U - RD - S - SA - 19

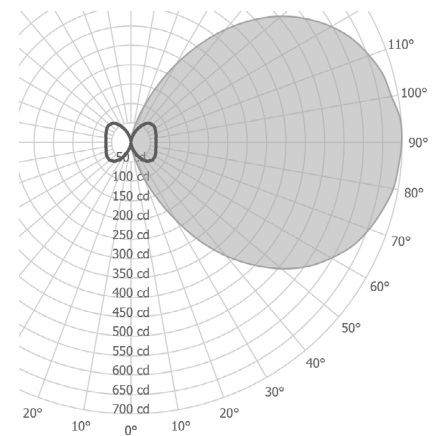

Sigma Outdoor

WALL

Luminaire with formed aluminum housing and machined end caps. The diffuser is Satin Clear Acrylic. The fixture can be arranged vertically or horizontally.

Durable, suitable for wet or dry locations.



Size	
27	27" [686mm]
39	39" [991mm]
51	51" [1,295mm]
Custom	



* 50mm diameter diffuser cylinder
* Fixture is ADA compliant

Sigma Outdoor

WALL



SPECIFICATION SHEET

Sigma Outdoor

