

Step RC

SURFACE



SPECIFICATION SHEET

Step RC



Model 1541

Type

S Surface

Size

24 24.0" [610mm]
28 28.0" [711mm]
32 32.0" [813mm]
36 36.0" [914mm]
48 48.0" [1219mm]

Custom

Wattage^{1,2}

24"

L 14W (1865lm)
M 28W (3465lm)

28"

L 17W (2265lm)
M 34W (4210lm)

32"

L 20W (2665lm)
M 40W (4955lm)

36"

L 23W (3065lm)
M 46W (5695lm)

48"

L 32W (4265lm)
M 64W (7925lm)

Color Temp³

30 3000
35 3500
40 4000

Voltage

U 120/277 Volt
1 120 Volt (DFPN only - see section Control)

Driver

RD Remote
ID Integral

Control - (RD/ID)

S Non-dim
D010 0-10V 10%
DFPN Lutron Forward Phase 1% 120 Volt
L3DAE Lutron Hi-lume 1% EcoSystem
L3DOE Hi-lume Premier 0.1% EcoSystem (remote only)

Diffuser Bottom

SW Satin opal acrylic

Diffuser Top

CPS Clear polycarbonate - sanded both sides

Finish


16 Clear anodized aluminum
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Notes

1 Nominal lumens value specified
2 Linear LED board, constant voltage 24 Volt
3 90+ CRI standard

Example fixture number:

1541 - S - 24 - L - 30 - U - ID - S - SW - CPS - 16

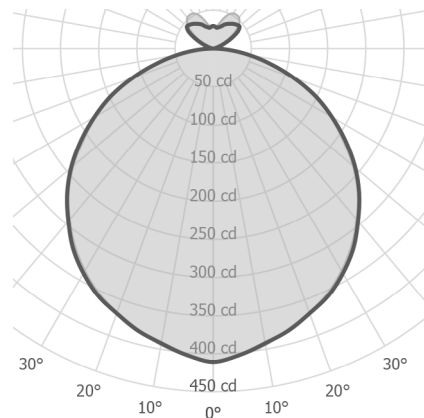

Step RC

SURFACE

The clean lines of the Step RC make it suitable for use in any modern environment. Step RC is available in pendant and surface versions with evenly illuminated Satin Opal lens, and 10% uplight.

Clear anodized extruded aluminum construction.



Size	
24	24" [610mm]
28	28" [711mm]
32	32" [813mm]
36	36" [914mm]
48	48" [1,219mm]
Custom	



* 70mm bottom diffuser profile





Step RC

SURFACE



SPECIFICATION SHEET

Step RC

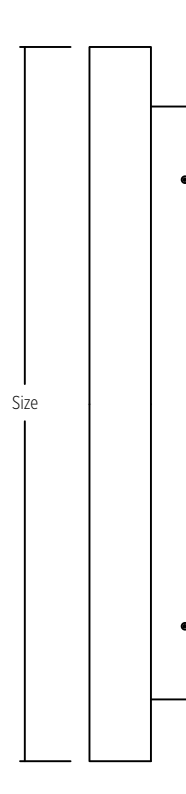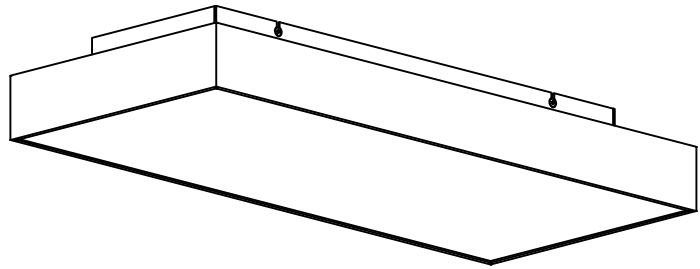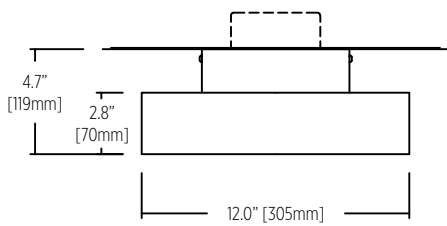

Note:

* There are additional holes in the mounting box (panel) for secure installation (mounting hardware provided) See Installation Instructions for details

4" Octagon Box
(By Others)

Size