

# Step

SURFACE



## SPECIFICATION SHEET

Step



### Model 1540

#### Type

S Surface

#### Size

24 24.0" [610mm]  
28 28.0" [711mm]  
32 32.0" [813mm]  
36 36.0" [914mm]

Custom

#### Wattage<sup>1,2</sup>

24"  
L 28W (3735lm)  
28"  
L 40W (5335lm)  
32"  
L 60W (8000lm)  
36"  
L 77W (10265lm)

#### Color Temp<sup>3</sup>

30 3000  
35 3500  
40 4000

#### Voltage

U 120/277 Volt  
1 120 Volt (DFPN only – see section Control)

#### Driver

RD Remote  
ID Integral

#### Control - (RD/ID)

S Non-dim  
D010 0-10V 10%  
DFPN Lutron Forward Phase 1% 120 Volt  
L3DAE Lutron Hi-lume 1% EcoSystem  
L3DOE Hi-lume Premier 0.1% EcoSystem (remote only)

#### Diffuser Bottom

SW Satin opal acrylic

#### Diffuser Top

CPS Clear polycarbonate - sanded both sides

#### Finish


16 Clear anodized aluminum  
21 Painted white - RAL 9010 matte  
26 Painted black - RAL 9005 matte  
22 Painted custom color

#### Notes

1 Nominal lumens value specified  
2 Linear LED board, constant voltage 24 Volt  
3 90+ CRI standard

#### Example fixture number:

1540 - S - 24 - L - 30 - U - ID - S - SW - CPS - 16

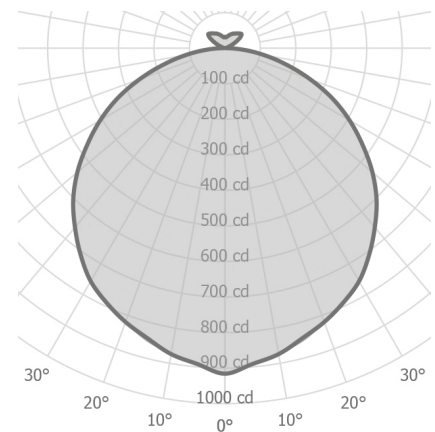



# Step

## SURFACE

The indirect lighting of 10% creates a glow on the ceiling around the fixture. Direct lighting creates even illumination of the Satin Opal diffuser. Step is used in various applications establishing itself as a stylish decorative product and technical architectural instrument.



Size	
24	24" [610mm]
28	28" [711mm]
32	32" [813mm]
36	36" [914mm]
Custom	



\* 70mm bottom diffuser profile


# Step

SURFACE



## SPECIFICATION SHEET

Step

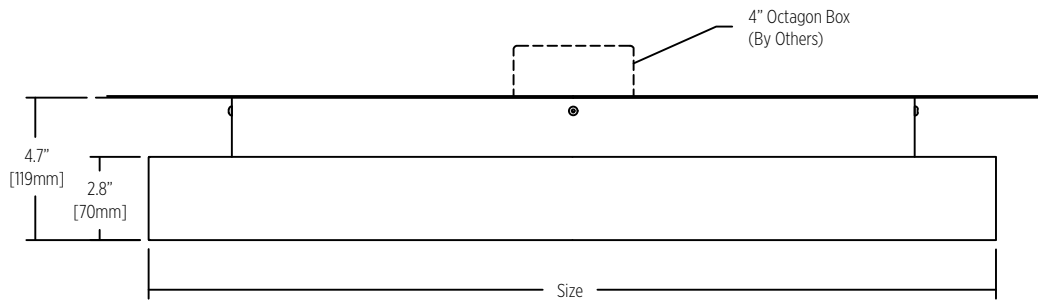

**Note:**

\* There are additional holes in the mounting box (panel) for secure installation (mounting hardware provided)  
See Installation Instructions for details

