

# Stick AT



PENDANT

## SPECIFICATION SHEET

### Stick AT



#### Model 1591

AT Acrylic top

#### Type

P Pendant

#### Size

18 18.0" [457mm]  
22 22.0" [559mm]  
Custom

#### Wattage <sup>1,2</sup>

M 8.4W (1310lm)  
H 12.6W (1710lm)

#### Color Temp <sup>3</sup>

30 3000  
35 3500  
40 4000

#### Voltage

U 120/277 Volt  
1 120 Volt (DFPN only - see section Control)

#### Driver

RD Remote

#### Control - RD

S Non-dim  
D010 0-10V 10%  
ECO30W EldoLED 0-10V 1%  
DFPN Lutron Forward Phase 1% 120 Volt  
PEQ1 Lutron Hi-lume 1% EcoSystem  
PEQ0 Lutron Hi-lume Premier 0.1% EcoSystem

#### Diffuser

SA Satin clear acrylic

#### Finish <sup>4</sup>

21 Painted white - RAL 9010 matte  
22 Painted custom color

#### Mounting

PC Power cable

#### Power Cable <sup>5</sup>


CC Clear insulated cable

#### Notes

- 1 Nominal lumens value specified
- 2 Downlight LED module, constant current 18 Volt 500 mA - 8.4 W, 700 mA - 12.6 W
- 3 90+ CRI standard
- 4 AT fixture and canopy are painted white standard, other colors optional on canopy
- 5 96" standard power cable length

#### Example fixture number:

1591 - P - 22 - M - 30 - U - RD - S - SA - 21 - PC - CC

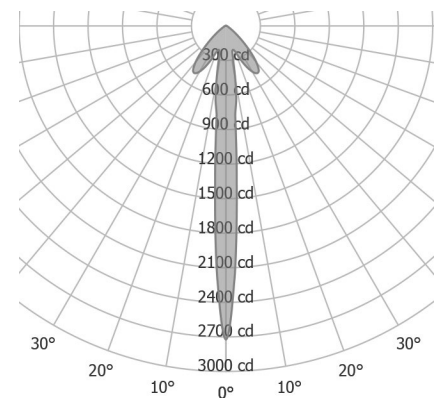



# Stick AT

## PENDANT

Stick AT appears like a flying candle. When used individually, in groupings with a custom canopy or attached to Arc fixture, Stick AT provides functional illumination in the space. Satin Clear Acrylic visible elements.



### Size

18 18" [458mm]

22 22" [560mm]

Custom



\* 70mm diameter diffuser cylinder  
\* Available in 18" [458mm] and 22" [560mm] long body

# Stick AT

PENDANT





## SPECIFICATION SHEET

Stick AT





### INSTALLATION TYPE

#### Straight power cable with remote driver

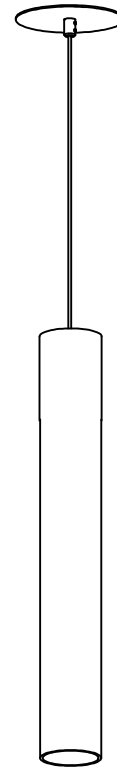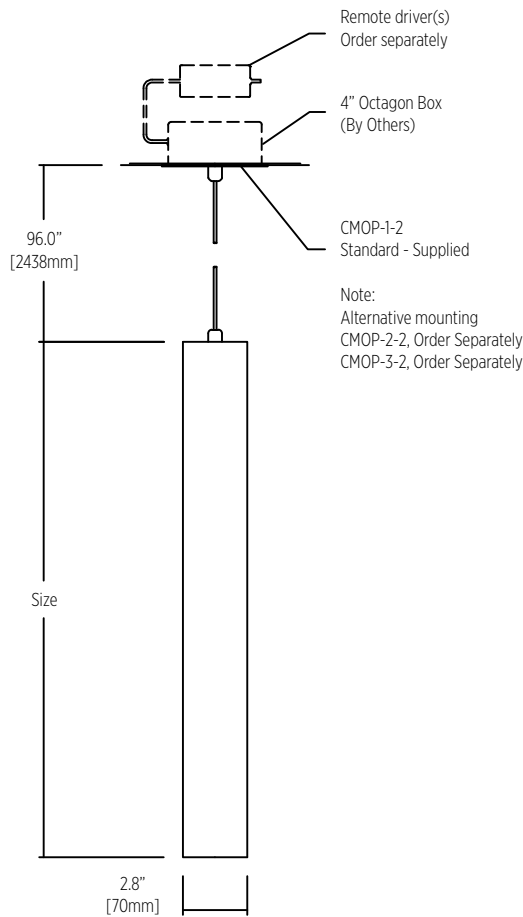

#### MOP-1-2 Standard - Supplied

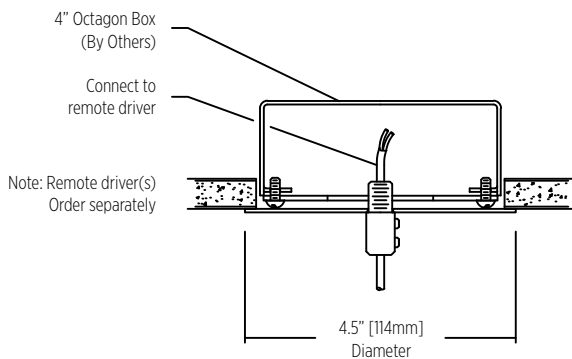

Mounting Option Power 1-2  
Octagon Box (By Others)  
Installed in drywall, wood or concrete ceiling

# Stick AT

PENDANT





## SPECIFICATION SHEET

Stick AT





### ALTERNATIVE MOUNTING OPTION

#### CMOP-2-2 Order Separately

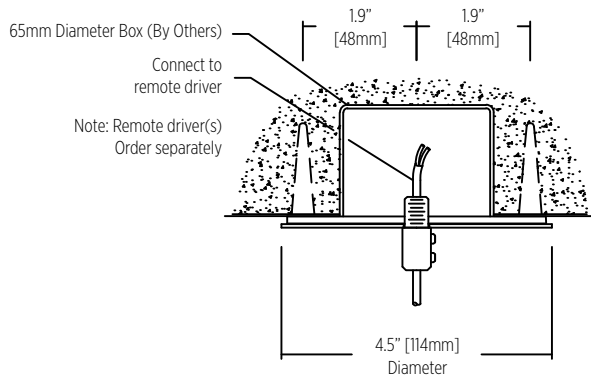

Mounting Option Power 2-2  
65mm Diameter Box (By Others)  
Installed in drywall, wood or concrete ceiling

#### CMOP-3-2 Order Separately

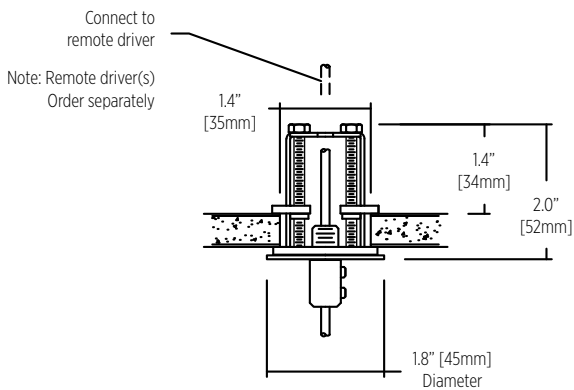

Mounting Option Power 3-2  
Suspension Assembly  
Installed in drywall or wood ceiling