PENDANT



SPECIFICATION SHEET

Stick MT



Model 1592 MT	Metal top
Type P	Pendant
Size	
18	18.0" [457mm]
22	22.0" [559mm]
26	26.0" [660mm]
Custom	

Wattage 1, 2

M 8.4W (1310lm) H 12.6W (1710lm)

Color Temp ³		
30	3000	
35	3500	
40	4000	

Voltage

U 120/277 Volt 1 120 Volt (DFPN only – see section

Control)

Driver

RD Remote

Control - RD

S Non-dim
D010 0-10V 10%
ECO30W EIdoLED 0-10V 1%
DFPN Lutron Forward Ph

DFPN Lutron Forward Phase 1% 120 Volt
PEQ1 Lutron Hi-lume 1% EcoSystem
PEQ0 Lutron Hi-lume Premier 0.1%

EcoSystem

Diffuser SA

Finish ⁴
19 Painted anodized aluminum RAL 9006 matte
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte

Painted custom color

Satin clear acrylic

Mounting

22

PC Power cable

Power Cable 5

CC Clear insulated cable


Notes

Nominal lumens value specified
Downlight LED module,
constant current 18 Volt
500 mA - 8.4 W, 700 mA - 12.6 W
90+ CRI standard
Canopy finish matches housing
96" standard power cable length

Example fixture number:

1592 - P - 22 - M - 30 - U - RD - S - SA - 21 - PC - CC






PENDANT

Suspended luminaire with metal housing. Satin clear diffuser in combination with different RAL finishes offers uniform contemporary design and a distinctive look.



]	
· •	
Ŀ	
ſ.	
•	
D	

Size		
18	18" [458mm]	
22	22" [560mm]	
26	26" [660mm]	
Custom		

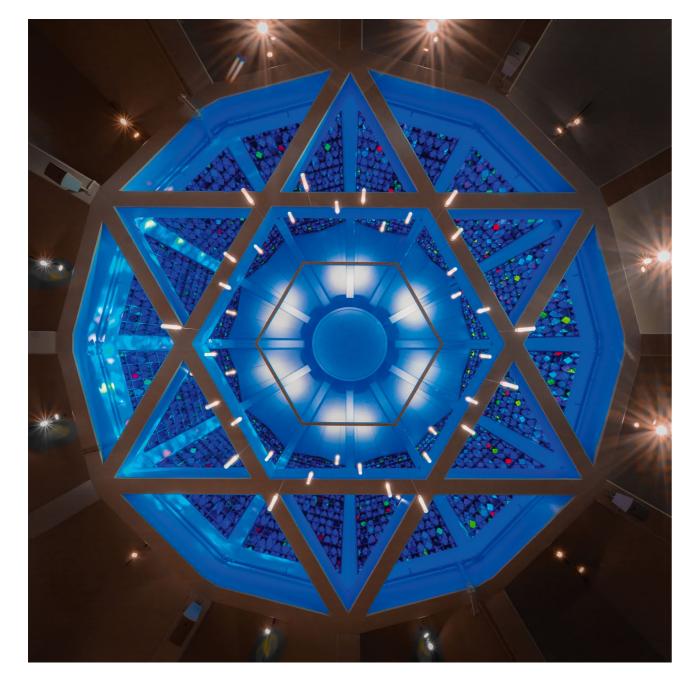



PENDANT




SPECIFICATION SHEET

Stick MT





INSTALLATION TYPE

Straight power cable with remote driver

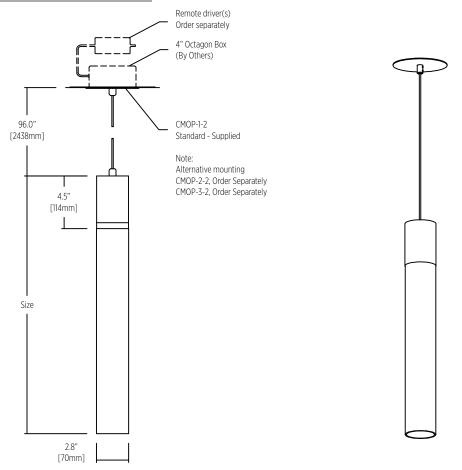

CMOP-1-2 Standard - Supplied





Mounting Option Power 1-2 Octagon Box (By Others) Installed in drywall, wood or concrete ceiling

PENDANT




SPECIFICATION SHEET


Stick MT



ALTERNATIVE MOUNTING OPTION


CMOP-2-2 Order Separately





Mounting Option Power 2-2 65mm Diameter Box (By Others) Installed in drywall, wood or concrete ceiling

CMOP-3-2 Order Separately





Mounting Option Power 3-2 Suspension Assembly Installed in drywall or wood ceiling

www.almlighting.com 2