


# ClearLine


CEILING

## INSTALLATION INSTRUCTIONS

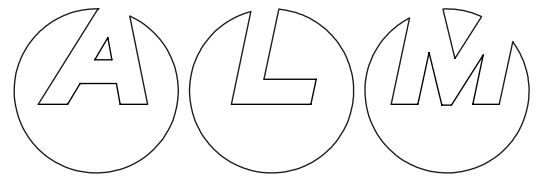

1	2" x 3" junction box and power feed (by others)
2	Mounting channel
3	Additional mounting hardware (provided)
4	Mounting screws to junction box 6-32 x 3/4" long, round head (by others)
5	Fixture housing
6	Fixture housing mounting screws
7	Fixture power wires
8	Light body assembly
9	Light body assembly mounting screws
10	Diffuser

**NOTE - Remote driver:**  
- If required, installed by others  
- Connect wires accordingly

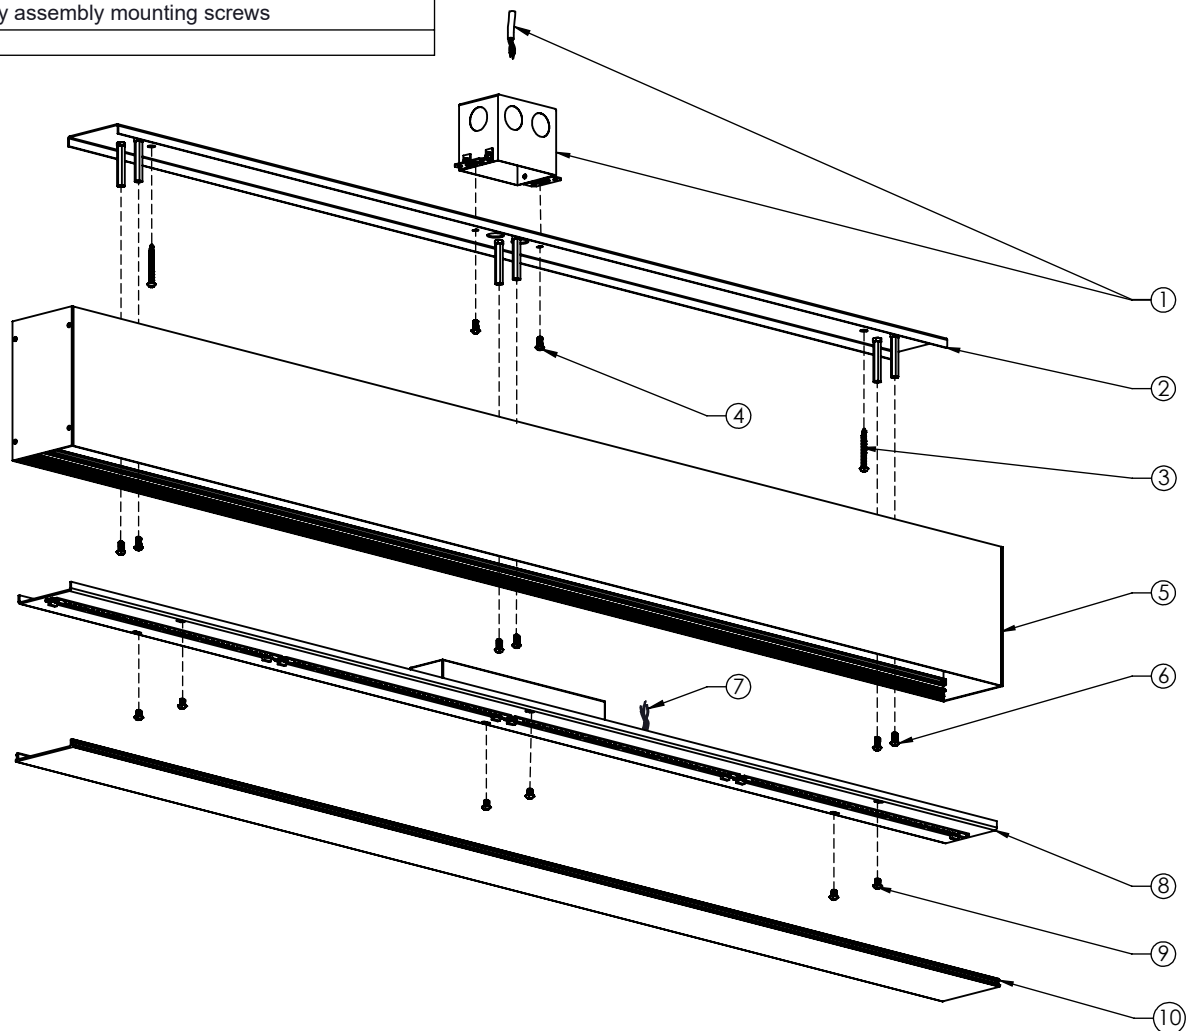

### INSTRUCTIONS:

1. Remove the diffuser.
2. Unscrew light body assembly mounting screws and remove light body assembly.
3. Unscrew fixture housing mounting screws and remove the mounting channel from fixture housing.
4. Bring the electrical power feed through the hole in mounting channel, secure mounting channel to the junction box (screws by others) and to the ceiling using mounting hardware provided. If junction box is not available, secure mounting channel to the ceiling using additional mounting hardware provided.
5. Bring the electrical power feed through the hole in fixture housing, place fixture housing into place and secure with screws provided.
6. Splice the fixture power wires and power feed as required, and secure light body assembly back into place with screws provided.  
Wires for connection are clearly labeled.
7. Snap-in diffuser back into place.
8. Energize.

### GENERAL NOTE:

- \* Turn power off before beginning.
- \* Do not connect to an ungrounded supply.
- \* Consult a qualified electrician to ensure correct branch circuit conductor.
- \* This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- \* Save these instructions.