
Stick MT

INSTALLATION INSTRUCTIONS



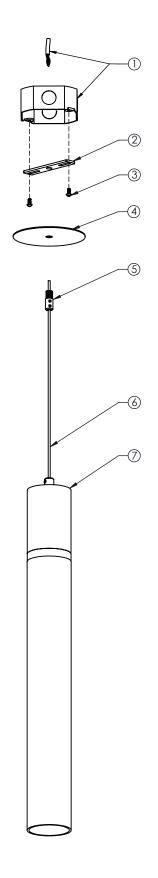

NOTE:

If octagon box is not available, please check "Stick MT Pendant Specification Sheet" and order alternative mounting option separately. Alternative mounting options available: - CMOP-2-2

- CMOP-3-2

1	4" Octagon box and power feed (by others)
2	Crossbar
3	Mounting screws to octagon box 8-32 x ¾" long, round head (by others)
4	4.5" [114mm] dia. ceiling plate
5	Power cord gripper
6	Flexible power cord
7	Fixture assembly

INSTRUCTIONS:

- Secure mounting crossbar to the standard 4" octagon box (screws by others).
- If octagon box is not available, see note above.
- 2. Bring the power cord through the power cord gripper, and through the ceiling plate.
- 3. Splice the fixture power wires and power feed as required. Wires for connection are clearly labeled.
- Install ceiling plate to the ceiling by screwing the power cord gripper to the mounting crossbar.
- 5. Secure the power cord with the set screws on the power cord gripper.
- 6. Energize.

GENERAL NOTE:

- * Turn power off before beginning.
- * Do not connect to an ungrounded supply.
- * Consult a qualified electrician to ensure correct branch circuit conductor.
- * This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- * Save these instructions.