


Gran Fuse

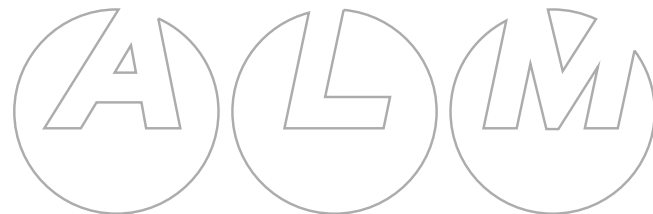

PENDANT

SPECIFICATION SHEET

Gran Fuse



Model 1575

Type

P Pendant

Size (general light only)

38 38.2" [971mm]
50 50.2" [1276mm]
62 62.2" [1581mm]
Custom

Size (general with downlight)

43 42.7" [1086mm]
55 54.7" [1390mm]
67 66.7" [1695mm]
Custom

Wattage^{1,2}

General light

38/43"
L 24W (3200lm)
50/55"
L 36W (4800lm)
62/67"
L 48W (6400lm)

Downlight³

M 8.4W (1310lm)
H 12.6W (1710lm)

X - No Downlight

Color Temp⁴

30 3000
35 3500
40 4000

Voltage

U 120/277 Volt
1 120 Volt (DFPN only - see section Control)

Driver

RD Remote
ID Integral

Control - (RD/ID - General)

S Non-dim
D010 0-10V 10%
DFPN Lutron Forward Phase 1% 120 Volt (remote only)
L3DAE Lutron Hi-lume 1% EcoSystem (remote only)
L3DOE Hi-lume Premier 0.1% EcoSystem (remote only)

Control (RD/ID - Downlight)

S Non-dim
D010 0-10V 10%
ECO30W EldoLED 0-10V 1% (remote only)
DFPN Lutron Forward Phase 1% 120VAC (remote only)
PEQ1 Lutron Hi-lume 1% EcoSystem
PEQ0 Lutron Hi-lume Premier 0.1% EcoSystem

X - No Downlight

Diffuser

AA Clear acrylic
SW Satin opal acrylic

Finish⁵

12 Satin nickel
19 Painted anodized aluminum - RAL 9006 matte
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Mounting⁶

CE Center canopy

Downlight options

D Flush downlight
CL Extended cylinder light

X - No Downlight

Power Cable⁷



CC Clear insulated cable (standard)
WC White cable
BC Black cable

Notes

- Nominal lumens value specified
- Linear LED board, constant voltage 24 Volt
- Downlight LED module, constant current 18 Volt 500 mA - 8.4 W, 700 mA - 12.6 W 90+ CRI standard
- Canopy finish matches housing
- Single canopy with multiple fixtures suspension available on request
- 96" standard cable length

Example fixture number:

1575 - P - 62 - L - X - 30 - U - ID - S - X - AA - SW - 26 - CE - X - CC

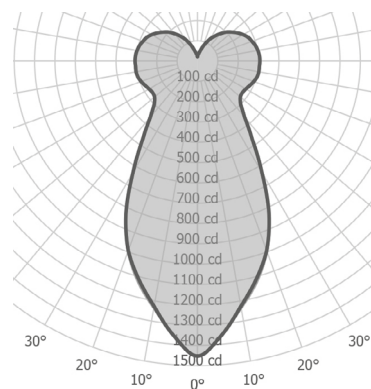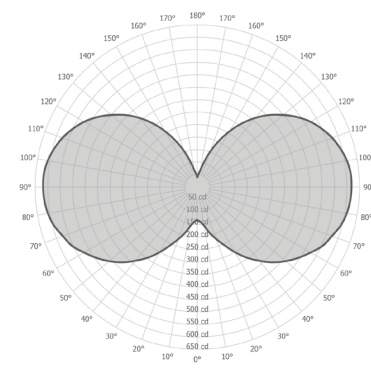

Gran Fuse

PENDANT


A suspended luminaire for large scale spaces, the Gran Fuse has multiple performance options and a classic form. Evenly illuminated shade surface provides 360 degrees of light. Available with general and downlight options.



Size	
38	38.2" [971mm]
43	42.7" [1,086mm]
50	50.2" [1,276mm]
55	54.7" [1,390mm]
62	62.2" [1,581mm]
67	66.7" [1,695mm]
Custom	



* Single canopy with multiple fixtures suspension available
* General illumination with accent downlight available

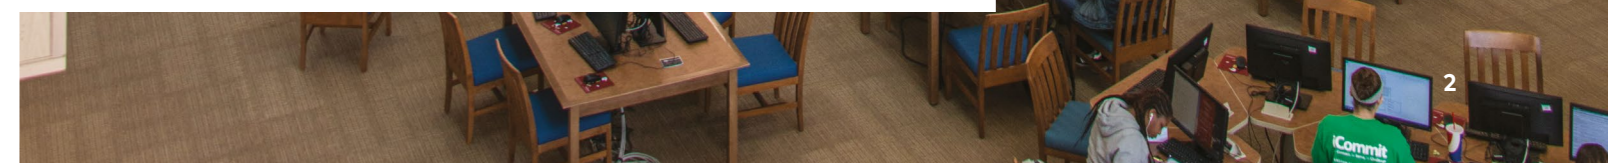

Gran Fuse

PENDANT





SPECIFICATION SHEET

Gran Fuse




INSTALLATION TYPE

General (ambient) lighting

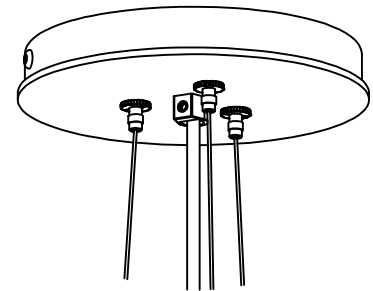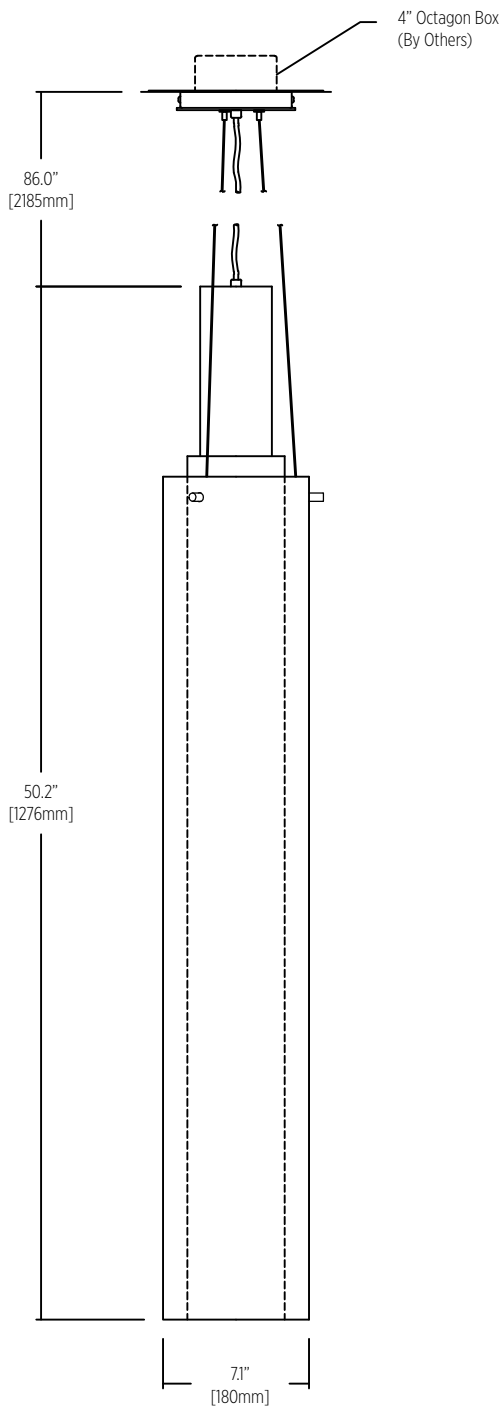

Canopy Detail 5.9" [150mm] Diameter


Fixture mounts directly to
4" octagon box - supplied
and installed by others

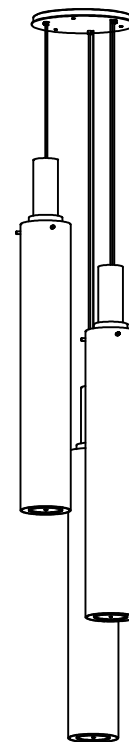

Cluster
Consult factory for options

Gran Fuse

PENDANT


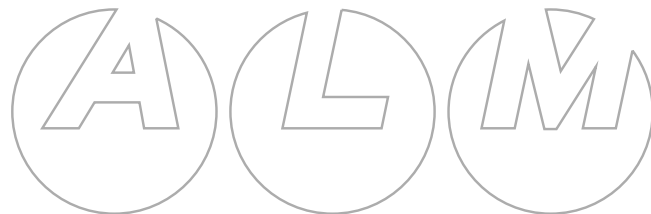


SPECIFICATION SHEET


Gran Fuse



General (ambient) lighting with accent downlight

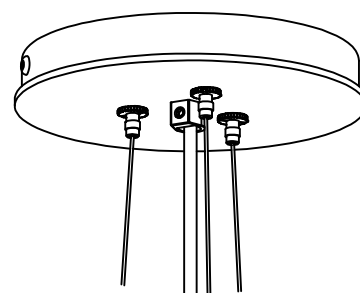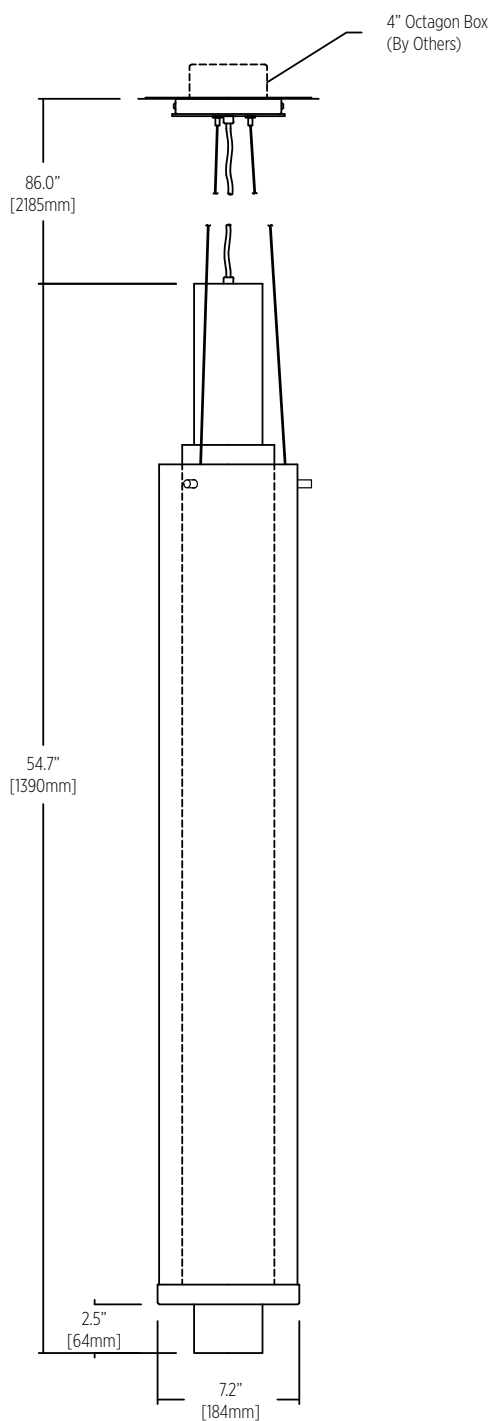

Canopy Detail
5.9" [150mm] Diameter
Fixture mounts directly to
4" octagon box - supplied
and installed by others

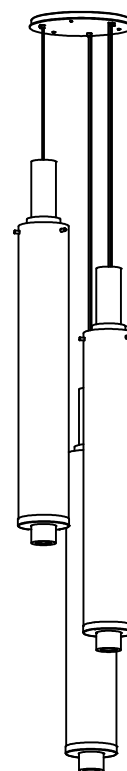

Cluster
Consult factory for options